

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)



[OSTT7224150](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



N=Number of poles

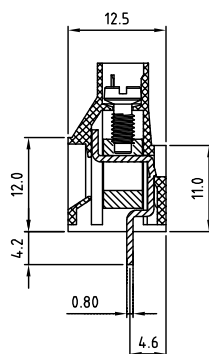

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
|      |      |             |          |
|      |      |             |          |
|      |      |             |          |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

#### Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

#### Electrical

- Voltage rating: 300VAC
- Current rating: 30A
- Wire range:
  - Solid wire(AWG): 10-24
  - Stranded wire(AWG): 10-24
- Torque(Lb-In): 8.9
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTT7XX4150

| No. of Poles | COLOR               |
|--------------|---------------------|
| 02 2 Poles   | 0: Black            |
| 03 3 Poles   | 5: Green (Standard) |
| ... ..       | 6: Blue             |
| 24 24 Poles  | 8: Grey             |



| TITLE                 |                      |                      |                      | OSTT7 7.62mm Series |                 |      |       |
|-----------------------|----------------------|----------------------|----------------------|---------------------|-----------------|------|-------|
| PART NO.              | OSTT7XX4150          |                      |                      | DWG NO.             | OSTT7XX4150.DWG |      |       |
| APPROVED              | CHECKED              | DESIGNED             | DRAWN                | CUST NO.            | Tolerance       |      |       |
| Shi Jun<br>2006.10.21 | Marvin<br>2006.10.21 | Marvin<br>2006.10.21 | Marvin<br>2006.10.21 |                     | UNIT: mm        | X    | ±0.50 |
|                       |                      |                      |                      |                     | SCALE: NONE     | X.X  | ±0.30 |
|                       |                      |                      |                      |                     | SHEET: 01/01    | X.XX | ±0.10 |
|                       |                      |                      |                      |                     | REV: C          | X*   | ±1°   |