

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)  
[OSTHP243052](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!						



**Material**

- Wire guard: PhBz
- With flange screw: steel M2.5 plated zinc
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 160VAC
- Current rating: 6A
- Wire range: Solid wire(AWG): 20-22 Stranded wire(AWG): 20-22
- Withstanding Voltage: 1.3KV
- Operating temperature: -30°C to +105°C



RoHS Compliant

PART NUMBER:

**OSTHPXX3052**

No. of Poles  
02: 2 Poles  
:  
24: 24 Poles

COLOR  
0: Black  
5: Green (Standard)  
6: Blue  
8: Grey

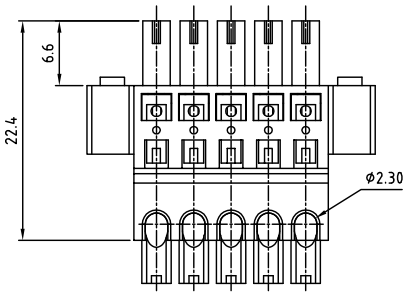

N=Number of contacts

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

		TITLE		OSTHP 3.81 Series with flange	
		PART NO.	OSTHPXX3052	DWG NO.	OSTHPXX3052.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13		X: ±0.50 X.X: ±0.30 X.XX: ±0.10 X*: ±1°
				SHEET: 01/01	REV.: C