



## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)

[OSTT4240452](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

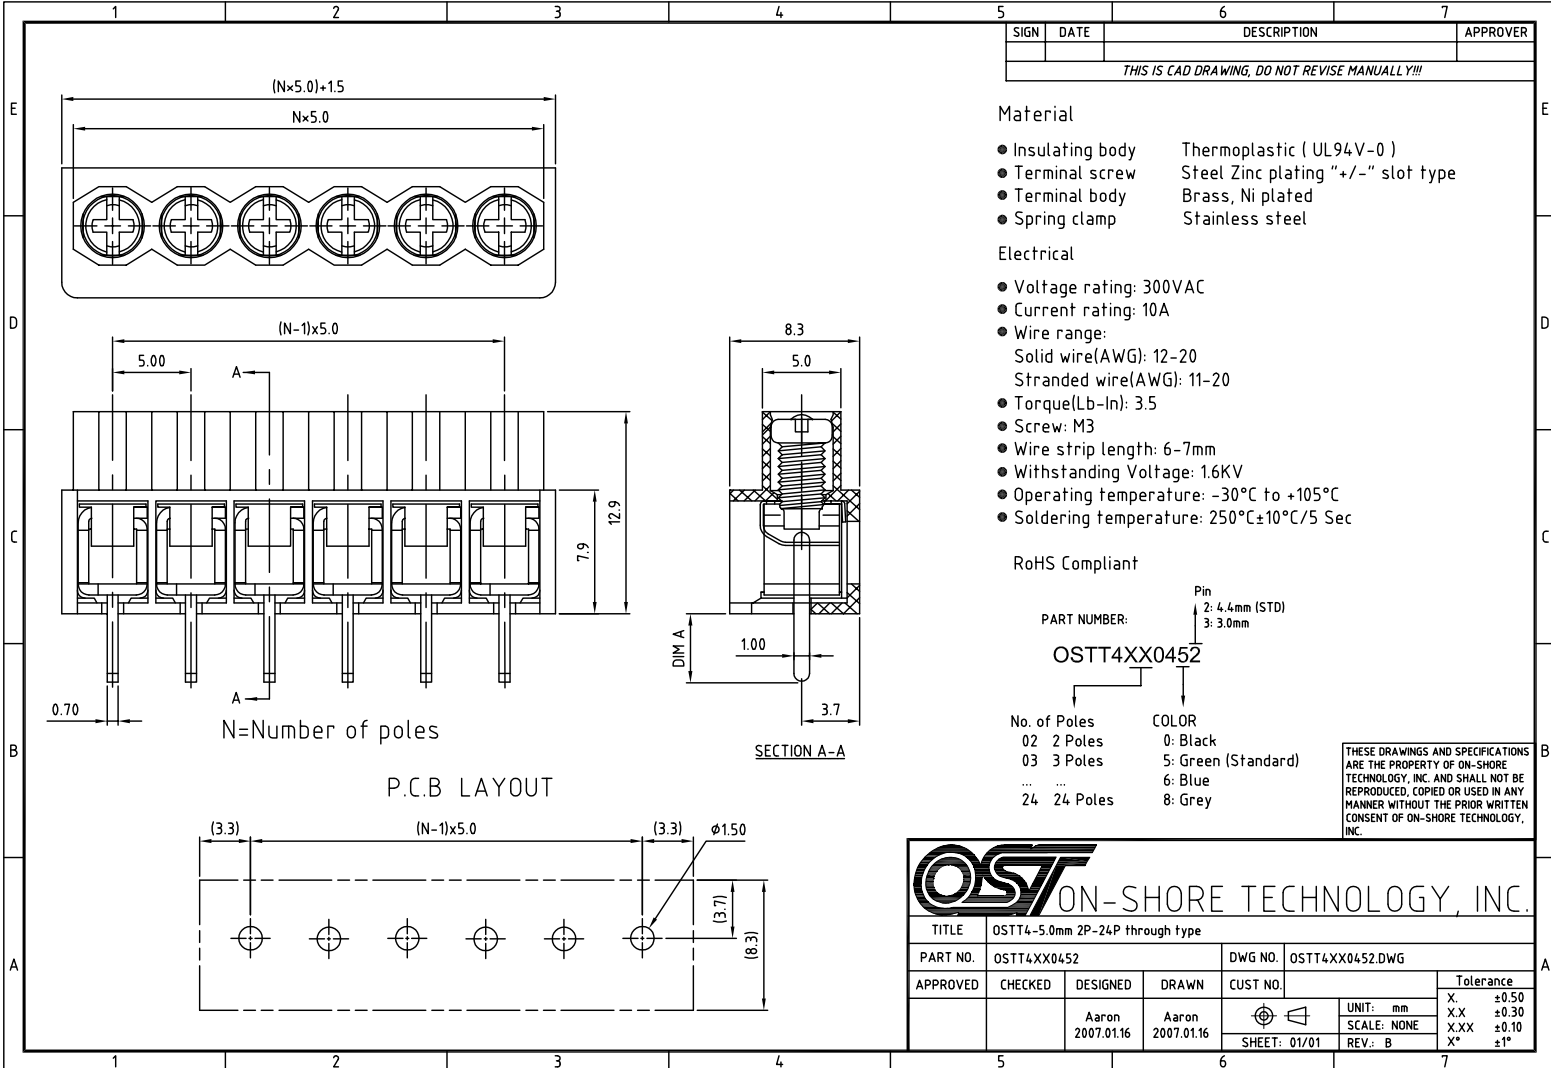

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material**
- Insulating body: Thermoplastic (UL94V-0)
  - Terminal screw: Steel Zinc plating "+/-" slot type
  - Terminal body: Brass, Ni plated
  - Spring clamp: Stainless steel

- Electrical**
- Voltage rating: 300VAC
  - Current rating: 10A
  - Wire range:
    - Solid wire(AWG): 12-20
    - Stranded wire(AWG): 12-20
  - Torque(Lb-In): 3.5
  - Screw: M3
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.6KV
  - Operating temperature: -30°C to +105°C
  - Soldering temperature: 250°C±10°C/5 Sec

**RoHS Compliant**

PART NUMBER: OSTT4XX0452

Pin 2: 4.4mm (STD)  
Pin 3: 3.0mm

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
...	6: Blue
24 24 Poles	8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

		TITLE: OSTT4-5.0mm 2P-24P through type	
		PART NO. OSTT4XX0452	DWG NO. OSTT4XX0452.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
		Aaron 2007.01.16	Aaron 2007.01.16
SHEET: 01/01		UNIT: mm	Tolerance
REV: B		SCALE: NONE	X ±0.50
			X.X ±0.30
			X.XX ±0.10
			X* ±1°