

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2297206](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



Extract from the online catalog

ELR 3-230AC/500AC- 2


Order No.: 2297206



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297206>


Three-phase solid-state contactor with 230 V AC input, 2 A output current, zero voltage switch, optionally with thermal fuse



| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 046356 172868 |
| Note | Made-to-order |
| sales group | G410 |
| Pack | 1 pcs. |
| Customs tariff | 85364900 |
| Catalog page information | Page 170 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
02/15/2008



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|-------------------------------|----------|
| Input data | |
| Mains frequency | 50 Hz |
| | 60 Hz |
| Rated actuating voltage U_c | 230 V AC |

ELR 3-230AC/500AC- 2 Order No.: 2297206

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297206>

| | |
|---|---------------------------|
| Rated actuating voltage range with reference to U_c | 0.4 ... 1.1 |
| Rated actuating current I_c | 12.5 mA |
| Switching threshold "0" signal, voltage | 48 V AC |
| Switching threshold "1" signal voltage | 96 V AC |
| Protective circuit | Surge protection Varistor |
| Status display | Yellow LED |
| Indication | Red LED |

Output data, load relay

| | |
|-------------------------------|-------------------------------|
| Output name | AC output |
| Nominal output voltage | 500 V AC |
| Nominal output voltage range | 48 V AC ... 575 V AC |
| Periodic peak reverse voltage | 1200 V |
| Load current | max. 2 A (see derating curve) |
| Leakage current | 6 mA |
| Residual voltage | < 1.5 V |
| Surge current | 200 A (t = 10 ms) |
| Max. load value | 250 A ² s |
| Type of protection | RCV circuit |
| Surge voltage protection | > 575 V AC |

Connection data

| | |
|--|----------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.14 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section stranded min. | 0.14 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 26 |
| Conductor cross section AWG/kcmil max | 12 |

General data

| | |
|---------------------------------|---------------------|
| Width | 40 mm |
| Height | 99 mm |
| Depth | 114.5 mm |
| Test voltage input/output | 5 kV _{rms} |
| Ambient temperature (operation) | -25 °C ... 70 °C |

ELR 3-230AC/500AC- 2 Order No.: 2297206

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297206>

| | |
|---|---|
| Ambient temperature (storage/transport) | -25 °C ... 70 °C |
| Mounting position | Vertical (horizontal DIN rail) |
| Assembly instructions | Can be aligned with spacing = 20 mm |
| Operating mode | 100% operating factor |
| Degree of protection | IP20 |
| Name | Standards/regulations |
| Standards/regulations | DIN EN 50178 |
| | EN 60947 |
| Name | Power station requirements |
| Standards/regulations | DWR 1300 / ZXX01/DD/7080.8d |
| Name | Air and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178 |
| Rated surge voltage / insulation | 6 kV / Basic isolation |
| Rated insulation voltage | 500 V |
| Pollution degree | 2 |
| Surge voltage category | III |

Certificates / Approvals




Certification CUL Listed, UL Listed

Certifications applied for: GL

Diagrams/Drawings


Block diagram

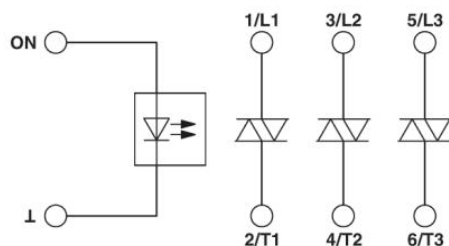

ELR 3-230AC/500AC- 2 Order No.: 2297206

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297206>

Diagram

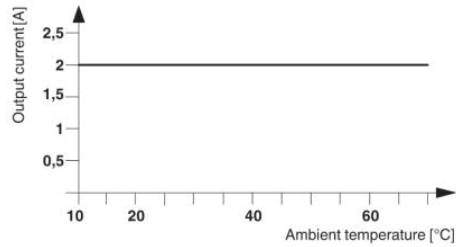

ELR 3-230AC/500AC- 2 Order No.: 2297206
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2297206>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;