

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[4833.1210](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Audio Connector, Plug, 6.3 mm, 2-pole, solder terminal, insulated



Description

- Solder terminal:
- for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole, insulated, straight

References


Alternative: Housing shielded 4833.1200

Technical Data

Diameter	6.3 mm
Number of Poles	2-pole
Ratings DC	1 A / 30 VDC
Ratings AC	1 A / 30 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 50 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housings	insulated
Style	straight
Lifetime	5000 Insertions

Dimensions

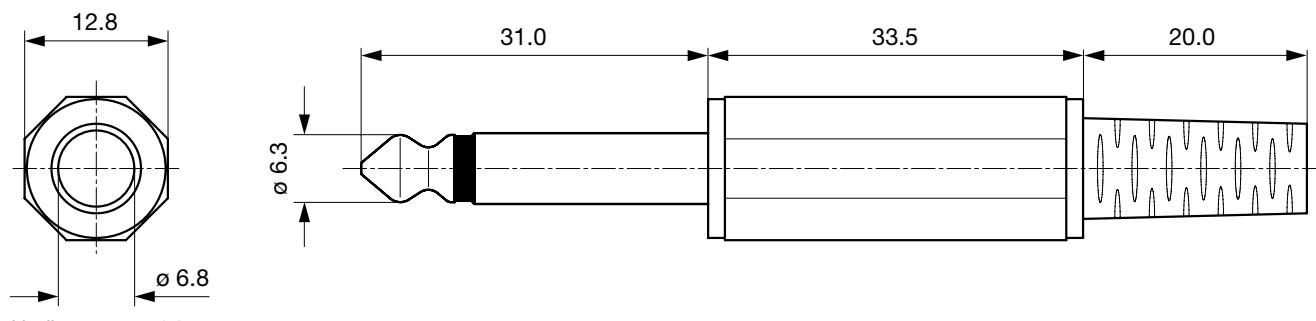

Cable diameter max. 6.8 mm

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	6.3	2-pole	solder terminal	4833.1210

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors**Category / Description****Audio Plug/Sockets Overview complete**

4833, solder terminal, screened, 2-pole, Audio Plug/Sockets, 6.3 mm 4833.2200

4833, PCB terminals, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm 4833.2230

4833, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm 4833.3200

Audio Plug/Sockets further types to 4833.1210