

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[International Rectifier \(Infineon Technologies Americas Corp.\)
IRL3103D1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


International IOR Rectifier

PD 9.1608C

IRL3103D1

FETKY™ MOSFET & SCHOTTKY RECTIFIER

- Copackaged HEXFET® Power MOSFET and Schottky Diode
- Generation 5 Technology
- Logic Level Gate Drive
- Minimize Circuit Inductance
- Ideal For Synchronous Regulator Application




$V_{DSS} = 30V$
 $R_{DS(on)} = 0.014\Omega$
 $I_D = 64A$

Description

The FETKY family of copackaged HEXFET power MOSFETs and Schottky Diodes offer the designer an innovative board space saving solution for switching regulator applications. A low on resistance Gen 5 MOSFET with a low forward voltage drop Schottky diode and minimized component interconnect inductance and resistance result in maximized converter efficiencies.

The TO-220 package is universally preferred for all commercial-industrial applications at power dissipation levels to approximately 50 watts. The low thermal resistance and low package cost of the TO-220 contribute to its wide acceptance throughout the industry.



Absolute Maximum Ratings

	Parameter	Max.	Units
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	64	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	45	
I_{DM}	Pulsed Drain Current ①③	220	
$P_D @ T_A = 25^\circ C$	Power Dissipation	2.0	W
$P_D @ T_C = 25^\circ C$	Power Dissipation	89	W
	Linear Derating Factor	0.56	W/°C
V_{GS}	Gate-to-Source Voltage	± 16	V
T_J	Operating Junction and	-55 to + 150	°C
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 seconds		
	Mounting torque, 6-32 or M3 screw	10 lbf•in (1.1N•m)	


Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.4	°C/W
$R_{\theta JA}$	Junction-to-Ambient	—	62	


IRL3103D1

International
IR Rectifier

MOSFET Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{GS} = 0V, I_D = 250\mu A$
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.037	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1mA$ ④
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	—	0.014	Ω	$V_{GS} = 10V, I_D = 34A$ ②
		—	—	0.019		$V_{GS} = 4.5V, I_D = 28A$ ②
$V_{GS(th)}$	Gate Threshold Voltage	1.0	—	—	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
g_{fs}	Forward Transconductance	23	—	—	S	$V_{DS} = 25V, I_D = 32A$ ③
I_{DSS}	Drain-to-Source Leakage Current	—	—	0.10	mA	$V_{DS} = 30V, V_{GS} = 0V$
		—	—	22		$V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{GS} = 16V$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -16V$
Q_g	Total Gate Charge	—	—	43	nC	$I_D = 32A$
Q_{gs}	Gate-to-Source Charge	—	—	14		$V_{DS} = 24V$
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	—	23		$V_{GS} = 4.5V$, See Fig. 6 ②
$t_{d(on)}$	Turn-On Delay Time	—	9.0	—	ns	$V_{DD} = 15V$
t_r	Rise Time	—	210	—		$I_D = 32A$
$t_{d(off)}$	Turn-Off Delay Time	—	20	—		$R_G = 3.4\Omega, V_{GS} = 4.5V$
t_f	Fall Time	—	54	—		$R_D = 0.43\Omega$, ②③
L_D	Internal Drain Inductance	—	4.5	—	nH	Between lead, 6mm (0.25in.) from package and center of die contact
L_S	Internal Source Inductance	—	7.5	—		
C_{iss}	Input Capacitance	—	1900	—	pF	$V_{GS} = 0V$
C_{oss}	Output Capacitance	—	810	—		$V_{DS} = 25V$
C_{rss}	Reverse Transfer Capacitance	—	240	—		$f = 1.0MHz$, See Fig. 5
C_{iss}	Input Capacitance	—	3500	—		$V_{GS} = 0V, V_{DS} = 0V$

Body Diode & Schottky Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_F (AV)$	(Schottky)	—	—	2.0	A	MOSFET symbol showing the integral reverse p-n junction and Schottky diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	220		
V_{SD1}	Diode Forward Voltage	—	—	1.3	V	$T_J = 25^\circ\text{C}, I_S = 32A, V_{GS} = 0V$ ②
V_{SD2}	Diode Forward Voltage	—	—	0.50	V	$T_J = 25^\circ\text{C}, I_S = 1.0A, V_{GS} = 0V$ ②
t_{rr}	Reverse Recovery Time	—	51	77	ns	$T_J = 25^\circ\text{C}, I_F = 32A$
Q_{rr}	Reverse Recovery Charge	—	49	73	nC	$di/dt = 100A/\mu s$ ②
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$)				

Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 10)

③ Uses IRL3103 data and test conditions

② Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.

International
IR Rectifier

IRL3103D1

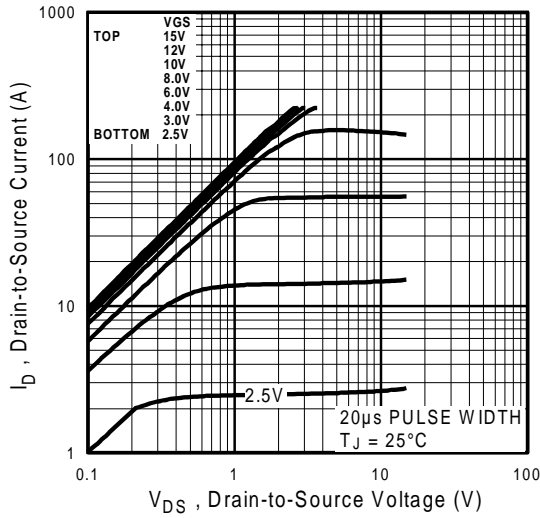


Fig 1. Typical Output Characteristics

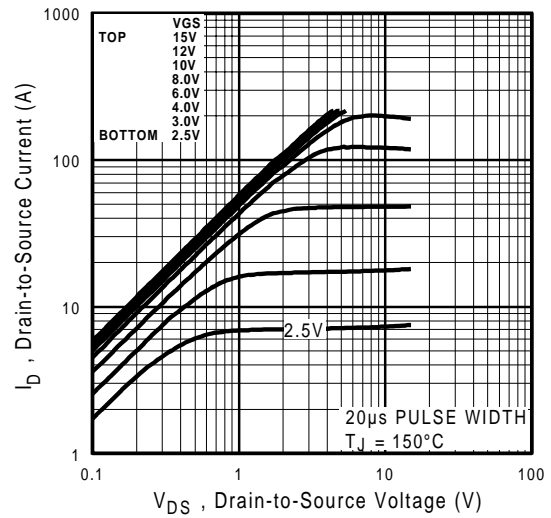


Fig 2. Typical Output Characteristics

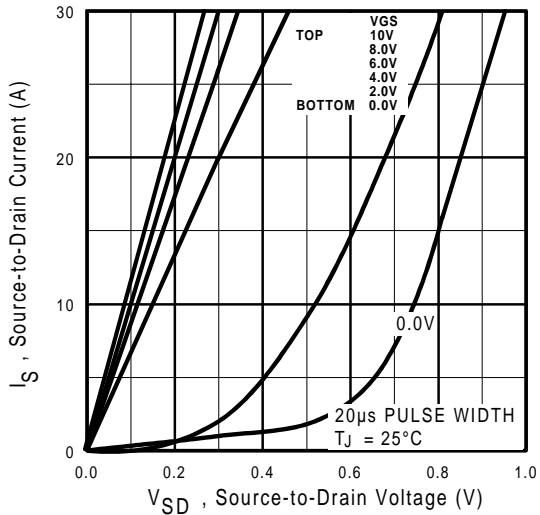


Fig 3. Typical Reverse Output Characteristics

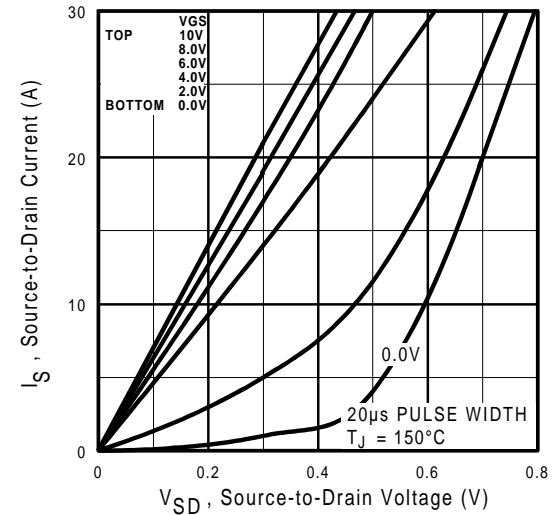


Fig 4. Typical Reverse Output Characteristics

IRL3103D1

International
IR Rectifier

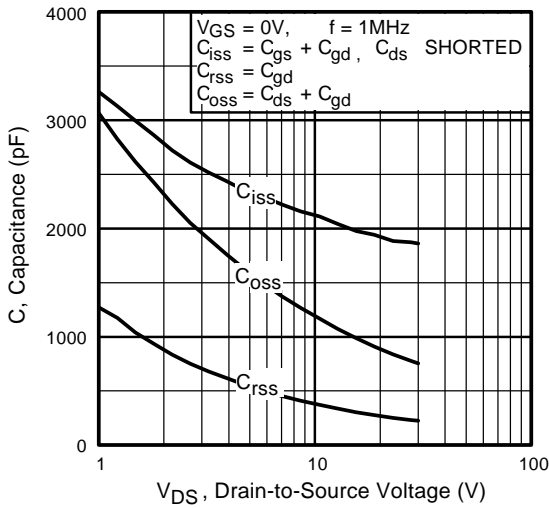


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

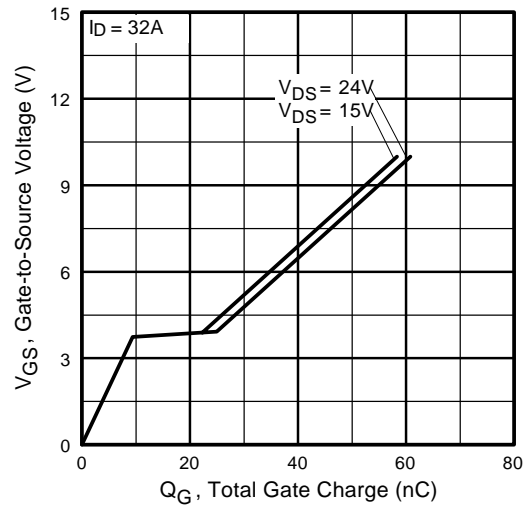


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

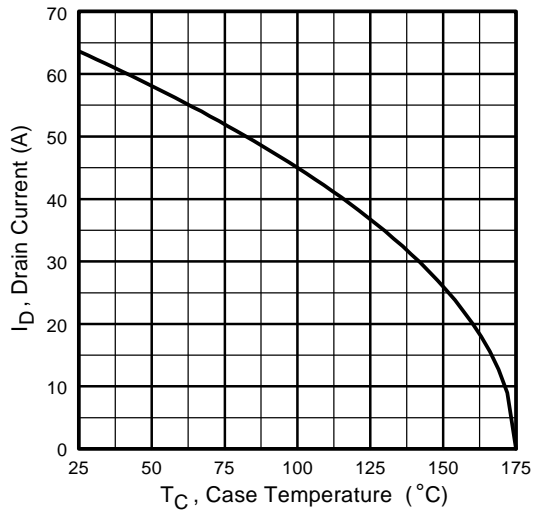


Fig 7. Maximum Drain Current Vs. Case Temperature

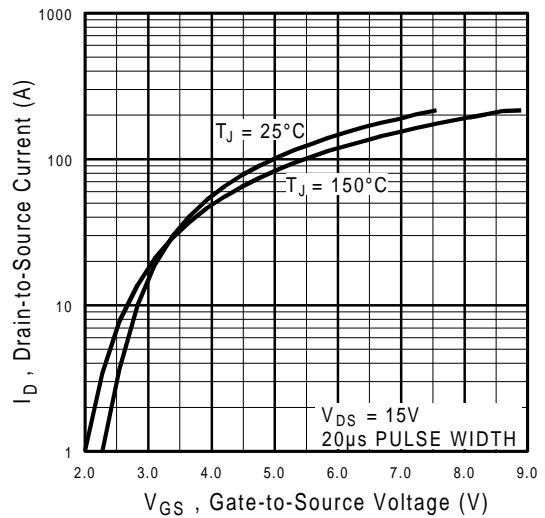


Fig 8. Typical Transfer Characteristics

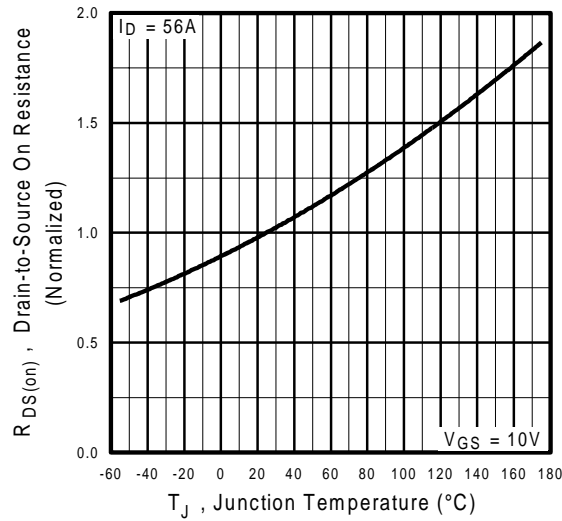


Fig 9. Normalized On-Resistance Vs. Temperature

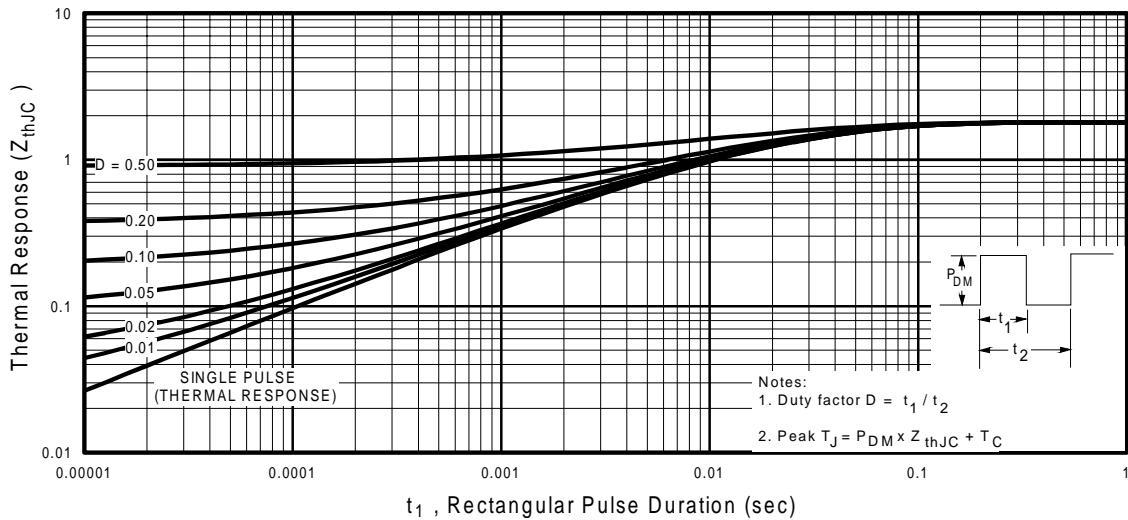


Fig 10. Maximum Effective Transient Thermal Impedance, Junction-to-Case


IRL3103D1

International
IR Rectifier

Package Outline


TO-220AB Outline

Dimensions are shown in millimeters (inches)

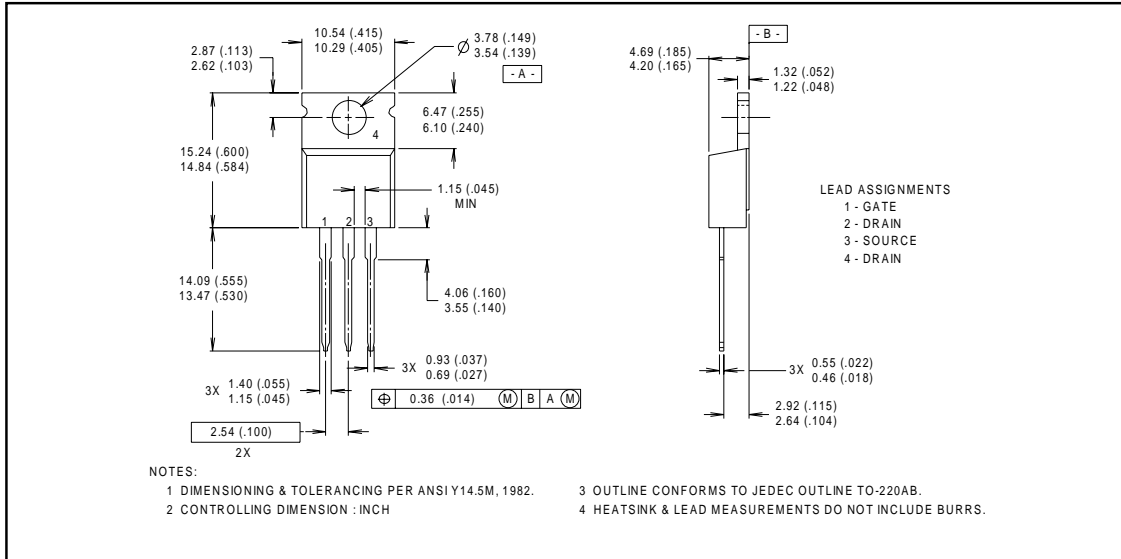

Part Marking Information

TO-220AB

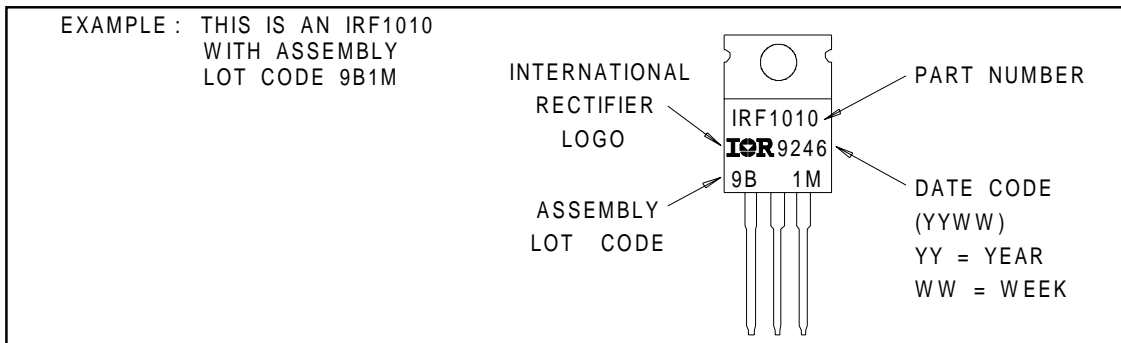

International
IR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331

EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020

IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897

IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590

IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111

IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo Japan 171 Tel: 81 3 3983 0086

IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371

<http://www.irf.com/> Data and specifications subject to change without notice. 12/97

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>