Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Apem Inc.
100450

For any questions, you can email us directly:
sales@integrated-circuit.com

IPD Launch
USB desktop controllers
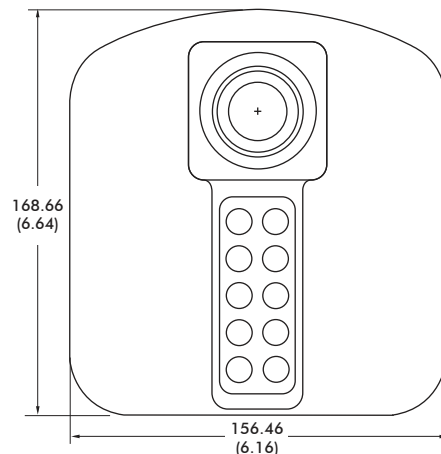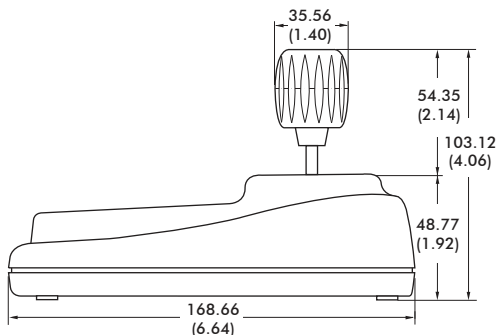
Distinctive features and specifications

❑ 3 axis joystick for PTZ control

❑ USB 1.1 HID compliant "game controller"

❑ Ten pushbutton switches

❑ Easy to use and operate

- Joystick performance: • Resistive three axis joystick
  - X/Y/Z for positioning control
- Joystick travel: • 36˚ for X and Y axis
  - 56˚ for Z axis
- Centering: Dual spring, omni-directional
- Joystick shaft: Nickel plated brass
- Joystick boot: Thermostatic elastomer
- Joystick handle: Glass filled nylon
- Pushbutton performance: 10 tactile pushbuttons on housing rated for 3,000,000 life cycles
- Desktop housing: High impact ABS
- Power: • Via USB interface (5V DC)
  - Consumption 32mA
- Operating conditions: -25 to +85˚C (-13 to +185˚F)

NOTE: All values are nominal.

- Approvals: • EN 55024:1998, EN 55022, CE
  - FCC Part 15 Subpart B Class B
  - RoHs compliant
- Weight: 435 g (0.96lb)
- Interface: USB port
- Connectors: • USB Type A Male
  - Cable Length: 2m; 6ft. 6.8in.
- Systems support integration: Windows 7, Vista, XP, 2000, Windows 8, OSX, Linux
- Supported protocols:
  - USB HID 1.1 game controller
  - Direct X (Gaming Control)
  - Joystick: Three HID axis
  - Pushbuttons: 10 HID buttons
  - Uses standard DirectX HID drivers
  - Connects directly to workstation PC
- Environmental: For indoor use only

NOTES:
Dimensions are in mm/(inch).
To order the IP Desktop please refer to Part Number 100-450.