

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[NMB Technologies Corp.](#)  
[KHN4NX1RC](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# KHN4NX (Reflow) Haptics

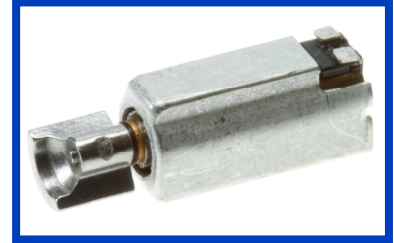


■ Outline UNIT:mm

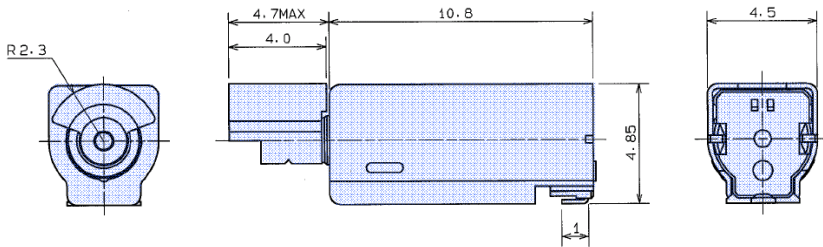



## ■ Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	Rated Speed (min <sup>-1</sup> )	Rated Current (mA)	Starting Voltage (V)	Starting Current (mA)	Vibration (N)	Weight (g)	Volume (mm <sup>3</sup> )
KHN4NX1RC	1.1 to 1.5	1.3	9500	52	0.5	74	0.48	0.55	125

## ■ Characteristics

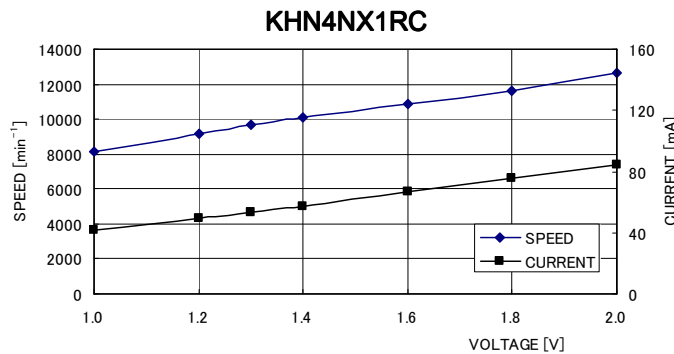

## ■ Improvement of Haptics function

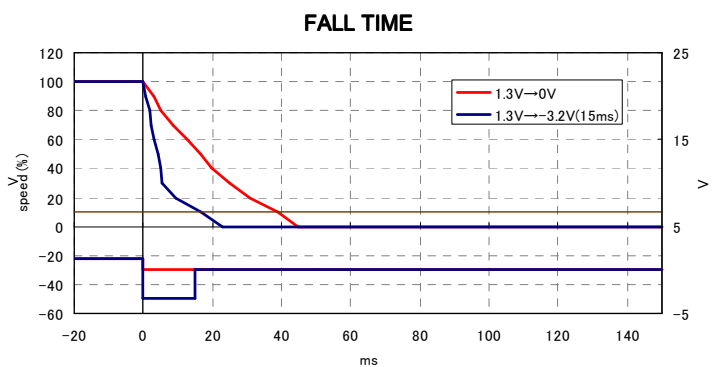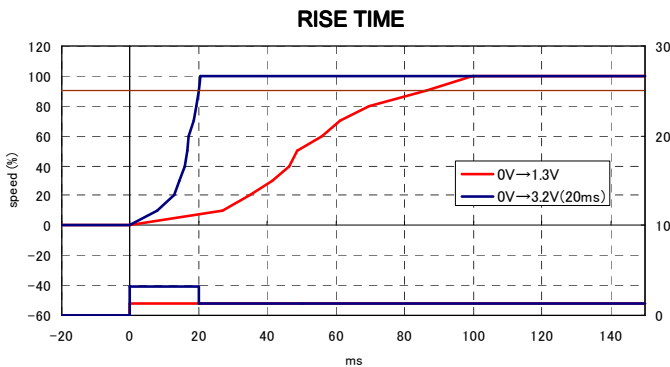

1.To reduce rise time, motor can be applied at 3.2V(20msec). 2.To reduce fall time, motor can be applied at -3.2V(15msec).

※please do not applied at 3.2V more than 30msec.

※please do not applied at -3.2V more than 30msec.