


Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Lumex, Inc.](#)
[SSB-LXB100SRW](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

DATE	REVISIONS	REV	DRAWING NUMBER	REV																																																
			SSB-LXB100SRW																																																	
ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C If=20mA																																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>PARAMETER</th> <th>MIN</th> <th>TYP</th> <th>MAX</th> <th>UNITS</th> <th>TEST COND</th> </tr> </thead> <tbody> <tr> <td>PEAK WAVELENGTH</td> <td></td> <td>660 (RED)</td> <td></td> <td>nm</td> <td></td> </tr> <tr> <td>FORWARD VOLTAGE</td> <td></td> <td>1.7</td> <td>2.2</td> <td>V_f</td> <td></td> </tr> <tr> <td>REVERSE VOLTAGE</td> <td>5.0</td> <td></td> <td></td> <td>V_r</td> <td>I_r=100uA</td> </tr> <tr> <td>AXIAL INTENSITY</td> <td></td> <td>80</td> <td></td> <td>mcd</td> <td>I_f=20mA</td> </tr> <tr> <td>VIEWING ANGLE</td> <td></td> <td>160</td> <td></td> <td>2x theta</td> <td></td> </tr> <tr> <td>EMITTED COLOR:</td> <td colspan="5">RED</td> </tr> <tr> <td>EPOXY LENS FINISH:</td> <td colspan="5">WHITE DIFFUSED</td> </tr> </tbody> </table>					PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	PEAK WAVELENGTH		660 (RED)		nm		FORWARD VOLTAGE		1.7	2.2	V _f		REVERSE VOLTAGE	5.0			V _r	I _r =100uA	AXIAL INTENSITY		80		mcd	I _f =20mA	VIEWING ANGLE		160		2x theta		EMITTED COLOR:	RED					EPOXY LENS FINISH:	WHITE DIFFUSED				
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND																																															
PEAK WAVELENGTH		660 (RED)		nm																																																
FORWARD VOLTAGE		1.7	2.2	V _f																																																
REVERSE VOLTAGE	5.0			V _r	I _r =100uA																																															
AXIAL INTENSITY		80		mcd	I _f =20mA																																															
VIEWING ANGLE		160		2x theta																																																
EMITTED COLOR:	RED																																																			
EPOXY LENS FINISH:	WHITE DIFFUSED																																																			
LIMITS OF SAFE OPERATION AT 25 DEG. C																																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>PARAMETER</th> <th>MAX</th> <th>UNITS</th> </tr> </thead> <tbody> <tr> <td>PEAK FORWARD CURRENT*</td> <td>150</td> <td>mA</td> </tr> <tr> <td>STEADY CURRENT</td> <td>30</td> <td>mA</td> </tr> <tr> <td>POWER DISSIPATION</td> <td>100</td> <td>mW</td> </tr> <tr> <td>DERATE FROM 38 °C</td> <td>-0.5</td> <td>mA/ °C</td> </tr> <tr> <td>OPERATING, STORAGE TEMP.</td> <td>-20 TO +85</td> <td>°C</td> </tr> <tr> <td>LEAD SOLDERING TEMP.</td> <td>+230</td> <td>°C</td> </tr> <tr> <td>1.6mm FROM BODY</td> <td></td> <td>5 SEC. MAX</td> </tr> </tbody> </table>					PARAMETER	MAX	UNITS	PEAK FORWARD CURRENT*	150	mA	STEADY CURRENT	30	mA	POWER DISSIPATION	100	mW	DERATE FROM 38 °C	-0.5	mA/ °C	OPERATING, STORAGE TEMP.	-20 TO +85	°C	LEAD SOLDERING TEMP.	+230	°C	1.6mm FROM BODY		5 SEC. MAX																								
PARAMETER	MAX	UNITS																																																		
PEAK FORWARD CURRENT*	150	mA																																																		
STEADY CURRENT	30	mA																																																		
POWER DISSIPATION	100	mW																																																		
DERATE FROM 38 °C	-0.5	mA/ °C																																																		
OPERATING, STORAGE TEMP.	-20 TO +85	°C																																																		
LEAD SOLDERING TEMP.	+230	°C																																																		
1.6mm FROM BODY		5 SEC. MAX																																																		
* t<10uS																																																				
<p>RELIABILITY NOTE: OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p>																																																				
																																																				
292 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (708) 359-2790																																																				
DATE: 4-8-93		DWN:	CHK'D:	APPD:																																																
SCALE: DO NOT SCALE DWG		19.05mm X 3.81mm LIGHT BAR, WHITE DIFFUSED																																																		
PAGE 1 OF 1		DRAWING NUMBER		REV																																																
		SSB-LXB100SRW																																																		

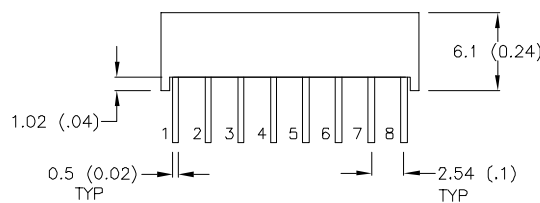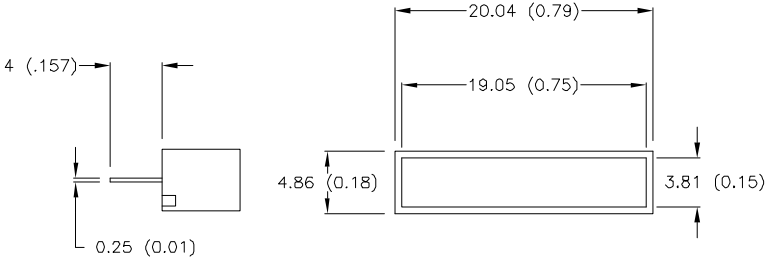

UNIT: mm (INCHES)
 TOLERANCE: +/-0.25 (+/-0.01) UNLESS OTHERWISE SPECIFIED

SSB100SR