Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Molex Connector Corporation
0398801202

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0398801202 - CONN EURO TERM BLK 2POS 5.08MM
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

39880

NO. OF CIRC. "XX"	DIM. "A" mm	DIM. "A" in	DIM. "B" mm	DIM. "B" in	MATERIAL NUMBER
02	10.7	.42	5.08	.200	398801202
03	15.7	.62	10.16	.400	398801203
04	20.8	.82	15.24	.600	398801204
05	25.9	1.02	20.32	.800	398801205
06	31.0	1.22	25.40	1.000	398801206
07	36.1	1.42	30.48	1.200	398801207
08	41.1	1.62	35.56	1.400	398801208
09	46.2	1.82	40.64	1.600	398801209
10	51.3	2.02	45.72	1.800	398801210
11	56.4	2.22	50.80	2.000	398801211
12	61.5	2.42	55.88	2.200	398801212
13	66.5	2.62	60.96	2.400	398801213
14	71.6	2.82	66.04	2.600	398801214
15	76.7	3.02	71.12	2.800	398801215
16	81.8	3.22	76.20	3.000	398801216
17	86.9	3.42	81.28	3.200	398801217
18	91.9	3.62	86.36	3.400	398801218
19	97.0	3.82	91.44	3.600	398801219
20	102.1	4.02	96.52	3.800	398801220
21	107.2	4.22	101.60	4.000	398801221
22	112.3	4.42	106.68	4.200	398801222
23	117.3	4.62	111.76	4.400	398801223
24	122.4	4.82	116.84	4.600	398801224
25	127.5	5.02	121.92	4.800	398801225

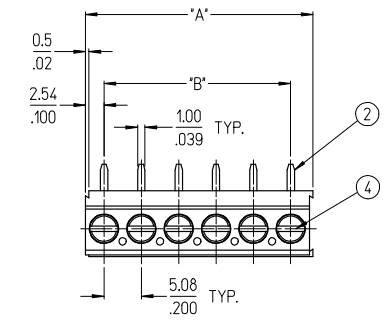



AUX. VIEW
(6 CIRCUIT SHOWN)

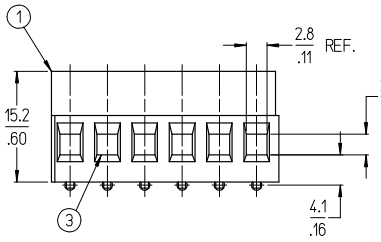

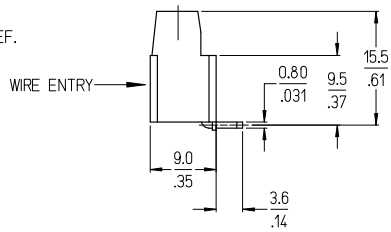



RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. "XX" REFERS TO QUANTITY OF CIRCUITS.
4. WIRE RANGE: 30 - 12 AWG
5. RATED VOLTAGE: 300V
6. RATED CURRENT: 17.5 A
7. RECOMMENDED TIGHTENING TORQUE: 0.5 N-m (4.4 lbf-in)
   MAXIMUM TIGHTENING TORQUE: 0.6 N-m (5.3 lbf-in)
8. WIRE STRIP LENGTH: 6 mm (.24 in).
9. OPERATING TEMPERATURE: -40°C TO 105°C.
10. ASSEMBLY IS ROHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	XX	SCREW, M3	COPPER ALLOY	NICKEL PLATED
3	XX	CLAMP, RISING	COPPER ALLOY	NICKEL PLATED
2	XX	TERMINAL, RIGHT ANGLE	COPPER ALLOY	TIN PLATED
1	1	HOUSING, UL94 V-0	PA66	BLACK

REV	DESCRIPTION
A	INITIAL RELEASE EC NO: ETC2007-0345 DRWN:CLYORK 2007/03/28 CHKD:JMACNEIL 2007/04/03 APPR:JMACNEIL 2007/04/03

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: C. YORK DATE: 2007/03/19
CHECKED BY: J. MACNEIL DATE: 2007/03/19
APPROVED BY: J. MACNEIL DATE: 2007/03/19

TITLE: 5.08MM [.200] FIXED, RIGHT ANGLE, EUROSTYLE

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-39880-011
SHEET NO.: 1 OF 1
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb_frame_B_P_ME_T
Rev. E 2006/04/15