

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0732510860](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SD-73251-086

MATERIALS AND FINISHES:
 BODY STAINLESS STEEL
 PASSIVATED

 CENTER CONTACT BERYLLIUM COPPER
 PLATED GOLD

 INSULATOR TEFLON

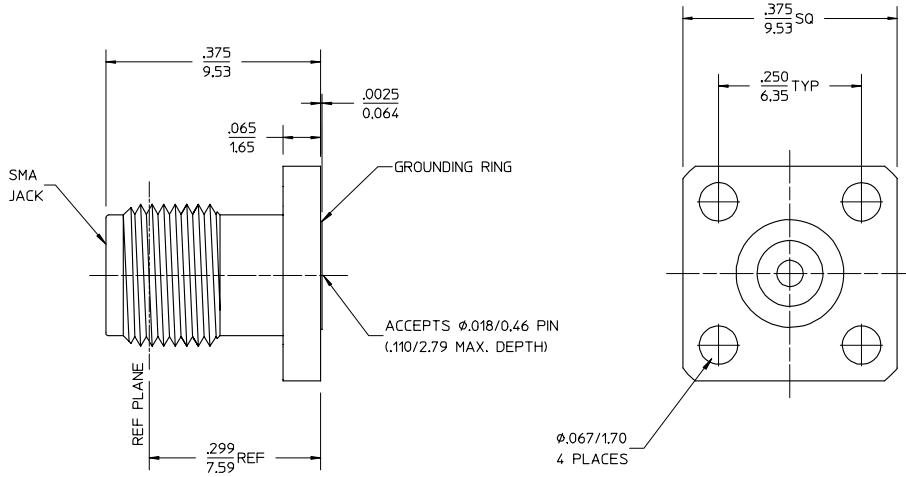

PART # 73251-0860

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE EC NO: URF-0233 DRWN: TEF 06/21/99 CHK: DHG 06/21/99 APPR: GMH 06/21/99	REV DESCRIPTION A	UNLESS OTHERWISE SPECIFIED DIMS ARE INCHES AND ANGLES ARE DEGREES. 1. $\sqrt{63}$ ALL OVER. 2. NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED. 3. PARTS TO BE FREE OF BURRS & SHARP EDGES .005 MAX BREAK. 4. EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT. 5. DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR.	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED) mm INCH 4 PLACES ± .0005 3 PLACES ± .005 2 PLACES ± .01 1 PLACE ± .1		SCALE DRAWN BY & DATE EDC 02/19/99	DESIGN UNITS <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH	THRD ANGLE PROJECTION <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH	DIMENSIONS: <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH	SHT 1 REV A
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		TITLE: SMA JACK, RECEPTACLE, 4 HOLE FLANGE MOUNT, ACCEPTS .018 DIA PIN SMA-JR/F	APPROVED BY & DATE GMH 02/19/99	MOLEX INCORPORATED	SHEET NO. 1 of 1	

UBORD.DGN REV A
 96/06/12 LEVEL 4