

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
V3-1075](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

MICRO SWITCH
 a Honeywell Division
 FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3-1075
 CK-L7500


CATALOG LISTING
V3-1075
 PAGE 1 OF 1
 RELEASE NO. PR-5913
 REPLACES
 CHECK
 REVISIONS
 A OBS CO77905 DAW 18 JUL 94
 B RE-INS CO82848 DCS 18 JUL 96
 C CO-93311 TSM 21 OCT 98
 D 0005782 R J 04 JUN 04
 CHECK
 04 JUN 04
 A K
 CHECK
 18 JUL 96
 DRAWN
 DCS
 FORMTEK

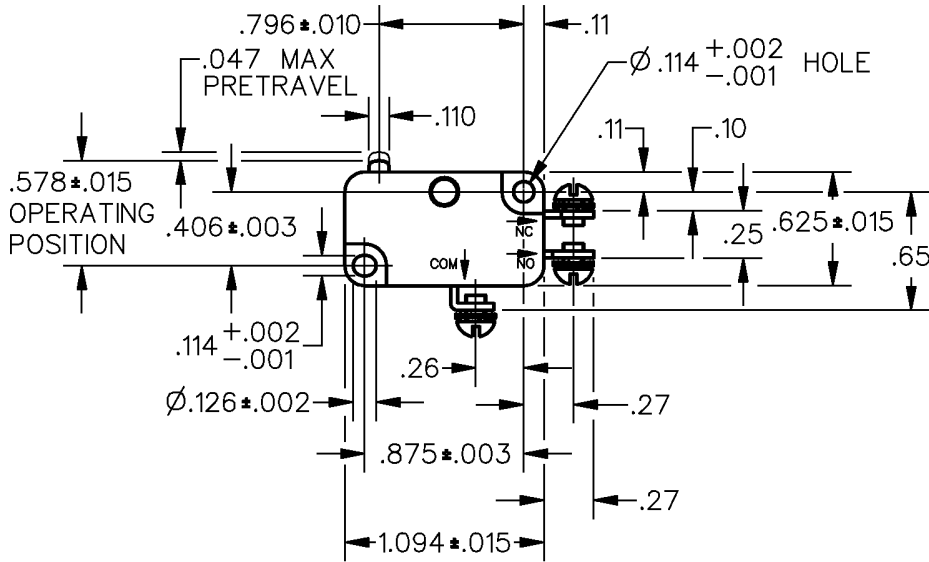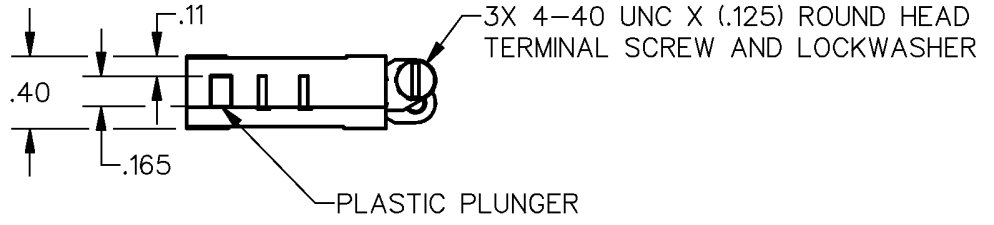

- NOTES
- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
 - 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
 - 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 6-14 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE — — — — 4 OZ MIN	L22 1A 125 VAC		
DIFFERENTIAL TRAVEL — — — .006-.016			
OVERTRAVEL — — — — .040 MIN			
FREE POSITION — — — — .625 MAX			
RELEASE TRAVEL — — — — .007 MIN			

