

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
V3-370](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division
 FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3-370
 CK-D3469

X101481-V3

REPLACES

PR-22590

CATALOG LISTING

V3-370

PAGE 1 OF 1

M

ISSUE

2

CHECK

REVISIONS

A	0005782
R J	04 JUN 04

CHECK

04 JUN 04



A K

CHECK

15 JAN 97

DCS

DDM/CAD
DRAWN

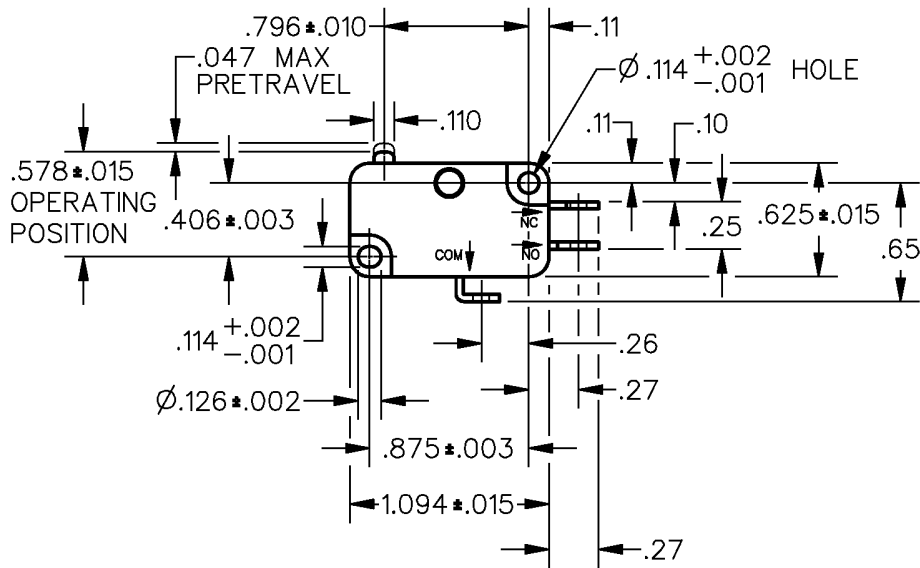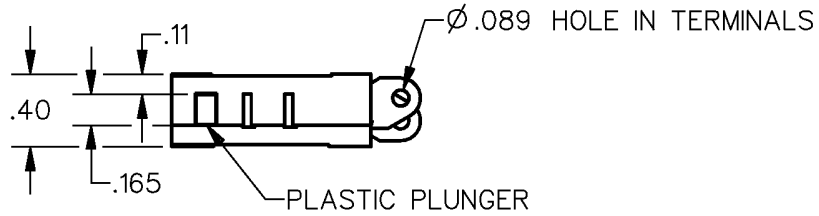


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 4 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT	
RELEASE FORCE --- 25 GRAMS MIN	L22 1A 125 VAC		
DIFFERENTIAL TRAVEL --- .002-.010			
OVERTRAVEL --- .050 MIN			
FREE POSITION --- .625 MAX			
RELEASE TRAVEL --- .010 MIN			

