

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
YA-2RBT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FREEPORT, MASSACHUSETTS


FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

YA-2RBT

CATALOG LISTING
YA-2RBT
 PAGE 1 OF 1
 REPLACES
 DRAWING NUMBER
M
 ISSUE
8
 REVISIONS
 A CO34310
 DEC 74
 B CO-92159-D
 JWB
 15 JUL 91
 C CO-77568
 K D R
 23 MAR 94
 D CO-92159
 CSL
 21 JAN 98
 E CO93346
 DLT
 27 AUG 98
 F CO-95750-B
 CSL
 29 MAR 00
 G 0000624
 JAH
 23 JUN 03
 CHECK
 JWH
 26 JUNE 86
 CHECK
 JWH
 26 JUNE 86
 CHECK
 GCH
 27 JUNE 86
 CHECK
 GCH
 27 JUNE 86
 DRAWN
 K.A.F.
 22 JUNE 56
 RASTER

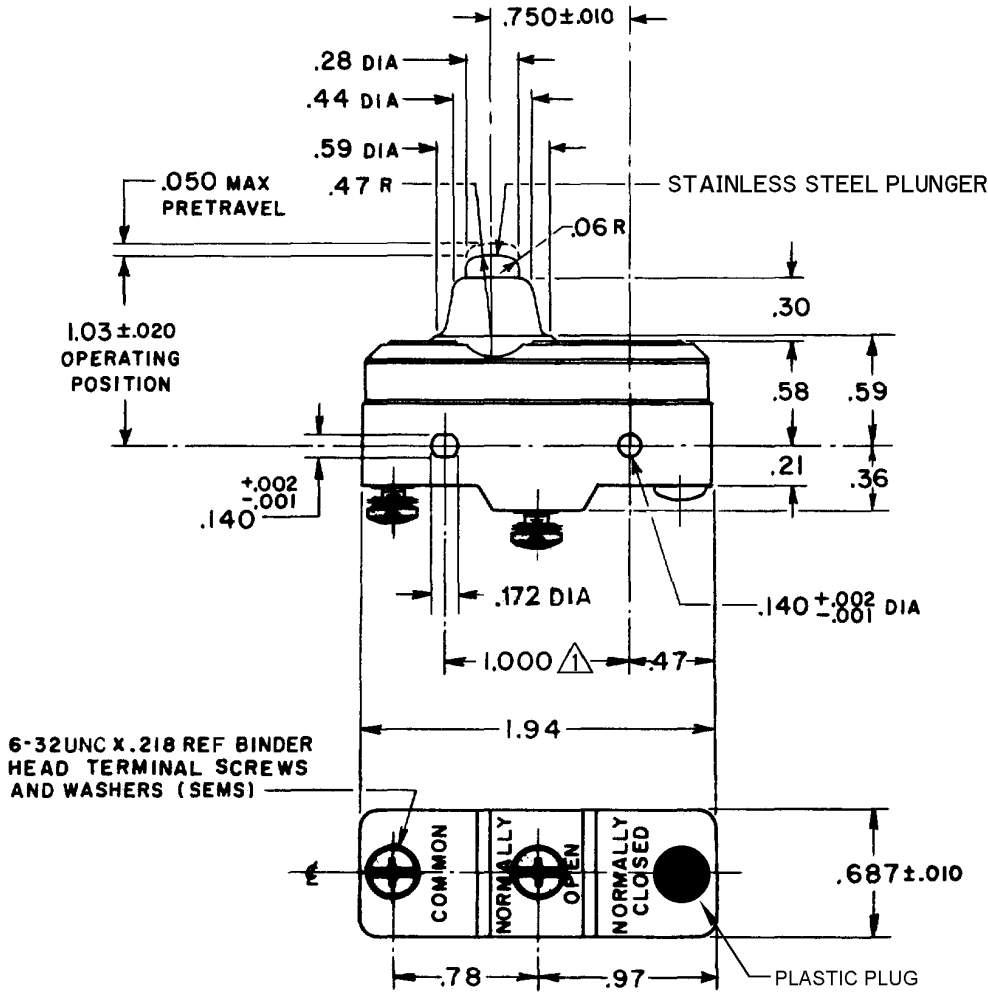

6-32UNC X .218 REF BINDER HEAD TERMINAL SCREWS AND WASHERS (SEMS)

NOTE
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE - FULL
OPERATING FORCE ----- 14 - 22 OZ.	CONTACT ARRANGEMENT S.P.N.O.	DO NOT SCALE PRINT
RELEASE FORCE ----- 10 OZ. MIN.	L23 20A 125, 250 OR 480 VAC 10A 125 VAC "L"	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL --- .002 - .0075	1HP 125 VAC, 2HP 250 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .094 MIN.	1/2A 125 VDC, 1/4A 250 VDC	ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
	L288 L299 L308	WEIGHT .064 LB.
	CE Ⓢ R Ⓢ	
	20(3)A 250V ~ T85 5E4	