

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CEL \(California Eastern Laboratories\)](#)
[ZICM2410P0-1-B](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

CEL MeshConnect™**Extended Range Module**

CEL's MeshConnect™ Extended Range module delivers industry-leading range, high performance, and a rich feature set, all at a surprisingly low cost.

The module's +20 dBm output power means extensive range – over two miles - plus more reliable transmission and fewer nodes in your network. It is especially useful for open outdoor applications where the nodes are physically far apart, or for indoor use where the nodes have to connect in a noisy RF environment. The Extended Range Module's outstanding +123.5 dB link budget ensures high quality connections even in such harsh environments.

Applicable to both the original Module and the new Extended Range Module, CEL has complete development kits which include a wide range of software packages that will help you develop your end product quickly.

Data rates up to 1 Mbps help you meet the demands of higher bandwidth networks, while a unique, on-chip voice CODEC opens the door voice transmission applications. A variety of other robust peripherals — battery monitor, temperature sensor, RSSI and AES encryption engines — are all included to help lower total system cost and component count.

The MeshConnect modules are ideal for mesh, point-to-point, and point-to-multipoint networks. Their low current consumption especially in standby mode makes them ideal for battery-powered designs, while their miniature footprint and integrated antenna helps to further reduce system size.

FCC, IC and CE certification eliminates the need for costly, time-consuming certification of your design.

CEL California Eastern Laboratories

4590 Patrick Henry Drive
Santa Clara, CA 95054
408.919.2500
www.cel.com



MeshConnect™ Extended Range Module for 802.15.4 Applications



KEY FEATURES

- Extended range: up to 12,000 feet
- Increased receiver sensitivity: - 103.5 dBm; +123.5 dB link budget
- Extended software support:
 - SMAC, MAC
 - SNAP®
 - Audio
- High Power out:
 - Up to 100mw (+20dBm)
 - Software configurable for multiple levels of power out
 - Extremely efficient low-power sleep mode
- Mesh, point-to-point, and point-to-multipoint networks
- Small footprint: 25 x 34 mm
- Hi-Speed Network support: 250Kbps, 500 Kbps & 1 Mbps
- Integrated voice CODEC (a-Law, μ -Law & ADPCM)
- 16 RF channels
- Inverted-F PCB antenna, plus support for external antennas
- Integrated 8051 MCU functionality:
 - Timers, UARTs(2), SPI Master/Slave, I²S
 - 96 KB Flash; 8 KB SRAM
- Based on the MeshConnect IC Platform

SPECIFICATIONS

Frequency	2405 to 2480 MHz
Operating Voltage	2.1 to 3.3 V
Output Power	+20 dBm
Rx Sensitivity	-103.5 dBm
Power Consumption:	
Transmit Mode:	200 mA @ +20dBm
Receive Mode:	38 mA
Standby Mode:	<1.0 μ A
Operating Temperature	-40°C to +85°C
Regulatory Certification	FCC / IC / CE

APPLICATIONS

Wide open long range environments
RF-noisy environments


CEL MeshConnect™ Extended Range Module

CEL MeshConnect™ Product Family

MeshConnect™ Module	
ZICM2410P0-1	Module with integrated PCB antenna
ZICM2410P0-1-SN	Module with integrated PCB antenna and SNAP OS with MAC address
ZICM2410P0-1C	Module with connector for external antenna option
ZICM2410P0-1C-SN	Module with integrated PCB antenna and SNAP OS with MAC address
MeshConnect™ Extended Range Module	
ZICM2410P2-2	Extended Range Module with integrated PCB antenna
ZICM2410P2-2-SN	Module with integrated PCB antenna and SNAP OS with MAC address
ZICM2410P2-2C	Extended Range Module with connector for external antenna option
ZICM2410P2-2C-SN	Module with integrated PCB antenna and SNAP OS with MAC address
MeshConnect™ System on Chip ICs	
ZIC2410QN48	48 pin QFN package
ZIC2410FG72	72 pin VFBGA package

MODULE DIMENSIONS (inches)

See Data Sheet for Pin Outs, RF and Electrical Specifications.

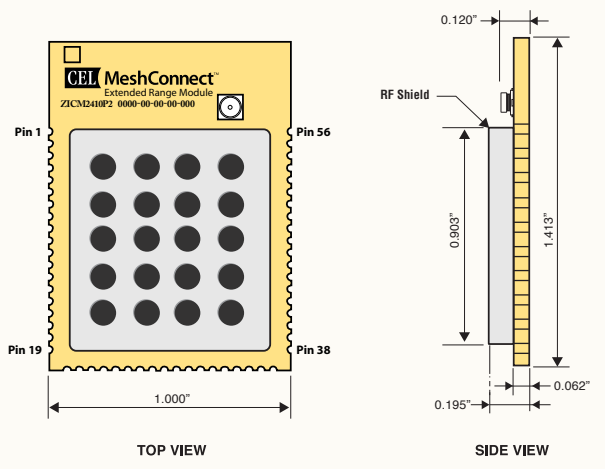

MeshConnect™ Development Kits

ZICM2410P0-KIT2-1	Evaluation and Development Kit for both Transceiver ICs and MeshConnect Module
ZICM2410P2-KIT1-1	Evaluation and Development Kit for both Transceiver ICs and Extended Range Module

CEL MeshConnect / ZigBee Modules / ICs

MODULE / IC	MeshConnect™	MeshConnect™ Extended Range	NEW: MeshConnect™ EM357 Mini		MeshConnect™ EM357	FreeStar Pro	MeshConnect™ IC
RADIO	2405 to 2480 MHz / DSSS / IEEE 802.15.4	2405 to 2480 MHz / DSSS / IEEE 802.15.4	2405 to 2480 MHz / DSSS / IEEE 802.15.4		2405 to 2480 MHz / DSSS / IEEE 802.15.4	2405 to 2480 MHz / DSSS / IEEE 802.15.4	2405 to 2480 MHz / DSSS / IEEE 802.15.4
Transceiver Chipset	MeshConnect™ ZIC2410 (SoC) 8 bit, 8051	MeshConnect™ ZIC2410 (SoC) 8 bit, 8051	Ember™ EM357 32 bit, ARM® Cortex™-M3		Ember™ EM357 32 bit, ARM® Cortex™-M3	Freescaler™ MC13224 / MC13226 32 bit, ARM7	MeshConnect™ CEL ZIC2410 8 bit, 8051
Fmax	16 MHz	16 MHz	24 MHz		24 MHz	32 MHz	16 MHz
Memory	96 KB Flash; 8 KB RAM	96 KB Flash; 8 KB RAM	192 KB Flash; 12 KB RAM		192 KB Flash; 12 KB RAM	128 KB Flash	96KB Flash
Inputs/Outputs	22	20	23		23	46	22 / 24
Network	Mesh, Point-to-Point, Point-to-Multipoint	Mesh, Point-to-Point, Point-to-Multipoint	Mesh, Point-to-Point, Point-to-Multipoint		Mesh, Point-to-Point, Point-to-Multipoint	Mesh, Point-to-Point, Point-to-Multipoint	Mesh, Point-to-Point, Point-to-Multipoint
Software/ ZigBee Stack	SNAP®, MAC, S-MAC, ZigBee® (RF4CE)	SNAP®, MAC, S-MAC, ZigBee® (RF4CE)	EmberZNet PRO™ (ZigBee Pro)		EmberZNet PRO™ (ZigBee Pro)	BeeStack™ ZigBee Pro - MC13226 MAC, S-MAC - MC13224	SNAP®, MAC, S-MAC, ZigBee® (RF4CE)
Tx Power Output	+6dBm	+20dBm	SP0 +8 dBm	SP2 +20dBm	+20dBm	+20dBm	+8 dBm
Rx Sensitivity	-97dBm	-103dBm	SP0 -100 dBm	SP2 -103 dBm	-100dBm	-94dBm	-98 dBm
Range (line of sight)	2,000 ft (609 M)	16,000 ft (4,876 M)	TBD		13,000 ft (3,962 M)	4,000 ft (1,219 M)	—
Vcc	2.1 - 3.3V	2.1 - 3.3V	2.1 - 3.6V		2.7 - 3.6V	2.0 - 3.6V	1.5V - 3.3V
Rx Current	35mA	38mA	SP0 30mA	SP2 34mA	28mA	30mA	33.2mA
Tx Current @ max dBm	44mA	200mA	SP0 44mA	SP2 150mA	170mA	193mA	30.6mA
Sleep Current	<1.0µA	<1.0µA	1.0µA		6.0µA	13µA	0.3µA
Dimensions	25 x 36 mm	25 x 36 mm	23.9 x 16.6 mm		25 x 36 mm	25 x 36 mm	QFN 7 x 7 48 pin VFBGA 5 x 5 72 pin
PART NO.	ZICM2410P0-1 ZICM2410P0-1C	ZICM2410P2-2 ZICM2410P2-2C	ZICM357SP0-1 ZICM357SP0-1C	ZICM357SP2-1 ZICM357SP2-1C	ZICM357P2-2 ZICM357P2-2C ZUSNAP357P2-1	ZFSM-201-1 ZFSM-201-1C ZFSM-201-2 ZFSM-201-2C	ZIC2410QN48 ZIC2410FG72
Eval Kit	ZICM2410P0-KIT2-1	ZICM2410P2-KIT1-1	ZICM-EM35X-DEV-KIT-2		ZICM357P2-KIT1-1 ZICM-EM35X-DEV-KIT-1	ZFSM-201-KIT-1	ZICM2410P0-KIT2-1