

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Standex-Meder Electronics](#)  
[MK26-1A35B-500W](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# MK26 Series Reed Sensors

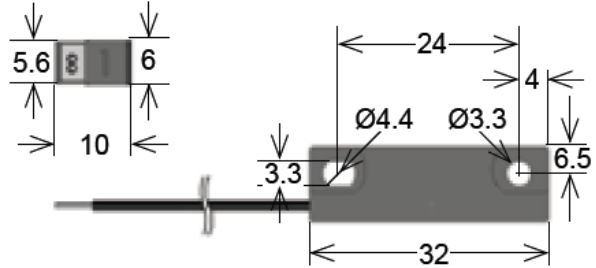

- Features: Standard Screw Fastening Reed Sensor with Cable Termination, For High Voltage Switches
- Applications: Position and Limit Switch, Hydraulic Actuator Position Indication & Others
- Markets: Appliance, Industrial, Security & Others

Part Description: **MK 26-0X00X-000X**

Contact QTY	Contact Form	Switch Model	Magnetic Sensitivity	Cable Length (mm)	Termination
1	A, B, C	35, 66, 85, 90	B, C, D, E, F	200, 300, 500, 1,000, 1,500, 2,000, 3,000, 5,000	w


Customer Options	Switch Model				Unit
	35	66	85	90	
<b>Contact Data</b>					
<b>Rated Power (max.)</b> Any DC combination of V&A not to exceed their individual max.'s	20	10	100	10	W
<b>Switching Voltage (max.)</b> DC or peak AC	200	200	1000	175	V
<b>Switching Current (max.)</b> DC or peak AC	1.0	0.5	1.0	0.5	A
<b>Carry Current (max.)</b> DC or peak AC	1.25	1.0	2.5	1.0	A
<b>Contact Resistance (max.)</b> @ 0.5V & 50mA	100	150	150	150	mOhm
<b>Breakdown Voltage (min.)</b> According to EN60255-5	0.22	0.25	1.5	0.2	kVDC
<b>Operating Time (max.)</b> Incl. Bounce; Measured with w/ Nominal Voltage	0.5	0.5	1.1	0.7	ms
<b>Release Time (max.)</b> Measured with no Coil Excitation	0.1	0.1	0.1	1.5	ms
<b>Insulation Resistance (typ.)</b> Rh<45%, 100V Test Voltage	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>9</sup>	GOhm
<b>Capacitance (typ.)</b> @ 10kHz across open Switch	0.3	0.4	0.5	1.5	pF

Housing and Cable Specifications	
Housing Material	PBT Glass Fibre Reinforced
Case Color	Black
Sealing Compound	Polyurethan
Cable Typ	Flat Cable / Round Cable
Cable Material	PVC
Cross Section (mm <sup>2</sup> )	2 x 0.25 / 3x0,14

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature Cable not moved	-20 to 80	°C
Operating Temperature Cable moved	-05 to 80	°C
Storage Temperature	-20 to 80	°C

Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

Glossary Magnetic Sensitivity						
Sensitivity	B	C	D	E	F	G
AT Range	10-15	15-20	20-25	25-30	30-35	35-40

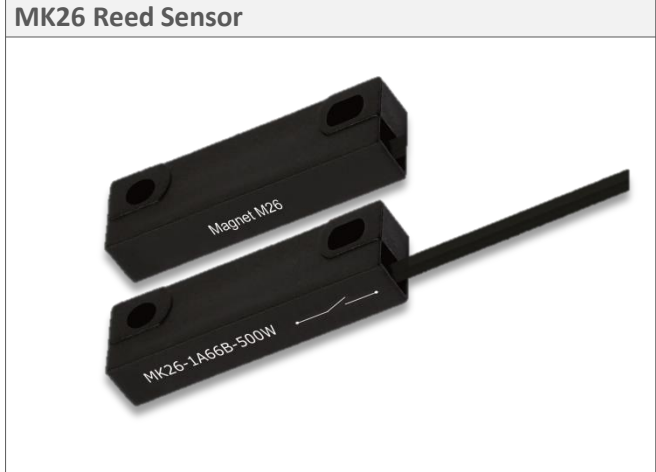

- ### Handling & Assembly Instructions
- Max torque of screw is 0,5Nm
  - Cable bending-radius is diameter x 15
  - Min. bending distance to housing is 5mm
  - Drag mark out of the mounting area forbidden
  - Decrease switching distance by mounting on iron
  - Do not use magnetically inductive screws
  - Series resistor recommended for > 5m cable length

