ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00430	Connector, USB AB mini receptacle	1	
2	50-00433	Connector, USB B mini male	1	
3	30-00099	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
4	24-00059	Overmold, PVC, white	1	
5	24-00025	Overmold, PVC, white	1	
6	Label 775	Adhesive, flag, 15x65 mm	1	

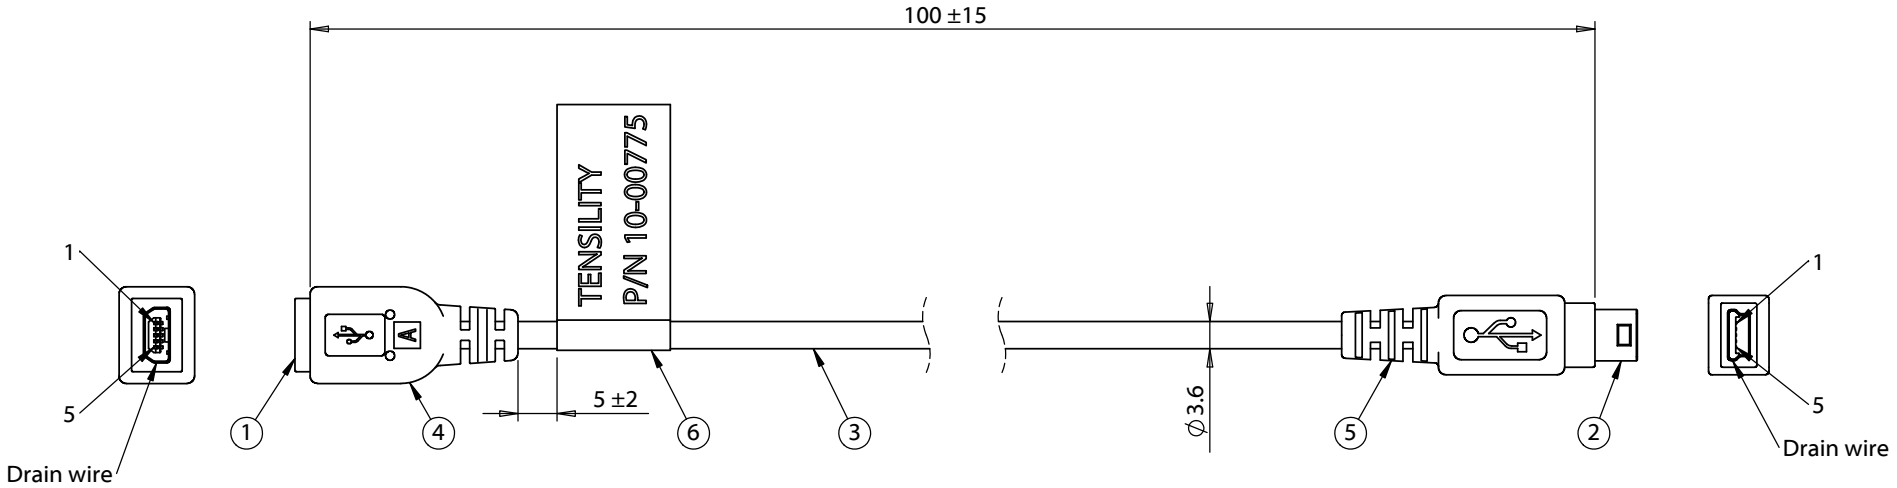

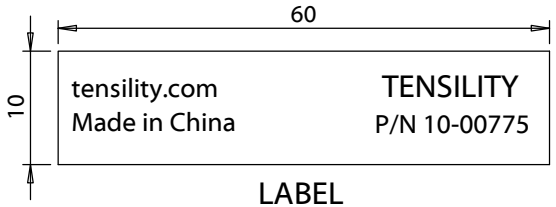

LABEL

Notes:
Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Wiring diagram		
50-00430	Wire Color	50-00433
1	Red	1
2	White	2
3	Green	3
5	Black	5
Shell	Drain & Shield	Shell

Revision:	Date:	Description:
A	9/21/2011	Initial release
A1	1/29/2014	Corrected shield type

Prepared: GL 2016.05.03 15:28:31 -07'00'

Verified: LA Digitally signed by LA DN: cn=LA, o=Tensility, ou=Engineering, email=QA@Tensility.com, c=US Date: 2016.05.17 17:00:36 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 100 mm, USB mini A receptacle to USB mini B 5P male, 28 AWG, 30-00099 wire, white

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-00775

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1