


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00431	Connector, USB B mini receptacle	1	
2	50-00432	Connector, USB A mini male	1	
3	30-00099	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
4	24-00060	Overmold, jack, USB mini B, white	1	
5	24-00022	Overmold, plug, USB mini A, white	1	
6	Label 784	Adhesive, flag, 15x65 mm	1	

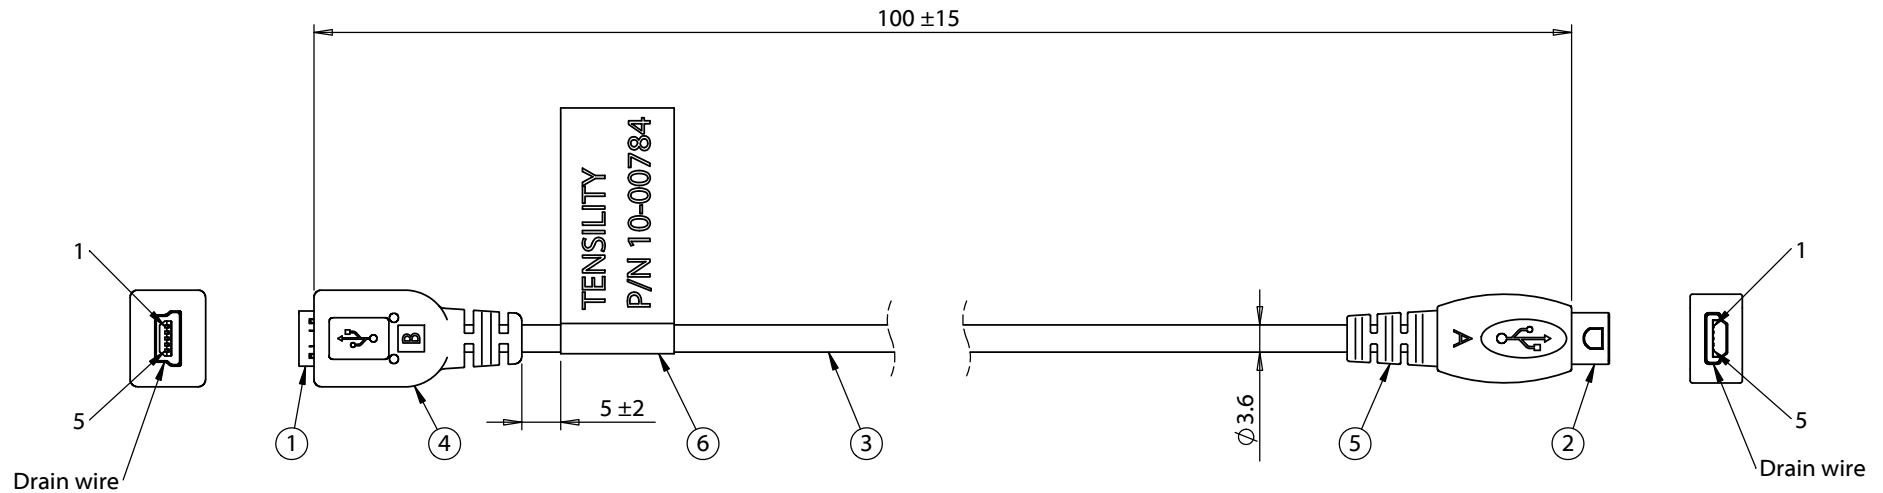

Wiring diagram		
50-00431	Wire Color	50-00432
1	Red	1
2	White	2
3	Green	3
5	Black	4 & 5
Shell	Drain & Shield	Shell

**Notes:**

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted



LABEL

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant  Function test: no open, no short circuit, no intermittent  Description: Cable, 100 mm, USB mini B 5P receptacle to USB mini A male, 28 AWG, 30-00099 wire, white	<div style="text-align: center;"> <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> </div>
A	9/21/2011	Initial release	Verified:		
A1	1/29/2014	Corrected shield type	Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm		
Scale: 1:1		Part number: <b>10-00784</b>		Sheet 1 of 1	