

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)
[XRN.M08.GLL.6GZ](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

SUMMARY

Wires

Low	8
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Download

[Request a quote](#)

[Catalog](#)

Series

Termination type	Female solder
IP rating	50
Cable Ø	5.30 - 6.50 mm
Matching parts	xxx

TECHNICAL DETAILS

Mechanics

Shell Style/Model	XR*: Free socket, key (N) or keys (P, S and T), with grey cable collet
Keying	3 key (alpha=30, plug: male contacts, receptacle: female contacts)
Housing Material	
Cable Fixing	∅ 5.3 - 6.5 mm
Variant	GZ : Gray collet nut for bend relief

Performance

Configuration	M08 : 8 Low Voltage
Insulator	L: PEEK
Rated Current	

Specifications


Test voltage (kV rms) Contact-contact: 1.5
 Air clearance min. (mm) or Creepage distance min. (mm): 0.75

Others

F ret (average): 130 N
 Working temperature: -50 deg C to + 170 deg C
 IP Rating: 50

DRAWINGS

Draws

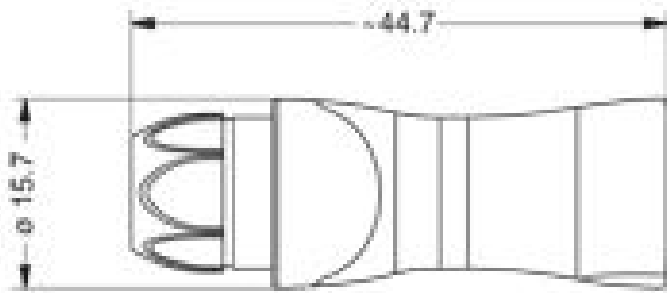

Dimensions

	A	L
mm.	15.7	46.7
in.	0.62	1.84

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Cables

26.308.PVB.63N.02	PVC	Black	
BELDEN 9421	PVC	Grey	