

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)  
[XRN.M13.GLL.6GZ](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# XRN.M13.GLL.6GZ

## SUMMARY

### # Wires

Low	13
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



### Download

[Request a quote](#)

[Catalog](#)

### Series

Termination type	Female solder
IP rating	50
Cable Ø	5.30 - 6.50 mm
Matching parts	xxx

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	XR*: Free socket, key (N) or keys (P, S and T), with grey cable collet
Keying	3 key (alpha=30, plug: male contacts, receptacle: female contacts)
Housing Material	
Cable Fixing	∅ 5.3 - 6.5 mm
Variant	GZ : Gray collet nut for bend relief

### Performance

Configuration	M13 : 13 Low Voltage
Insulator	L: PEEK
Rated Current	

### Specifications


Test voltage (kV rms) Contact-contact:	1.05
Air clearance min. (mm) or Creepage distance min. (mm):	0.5

### Others

F ret (average):	130 N
Working temperature:	-50 deg C to + 170 deg C
IP Rating:	50

## DRAWINGS

### Draws

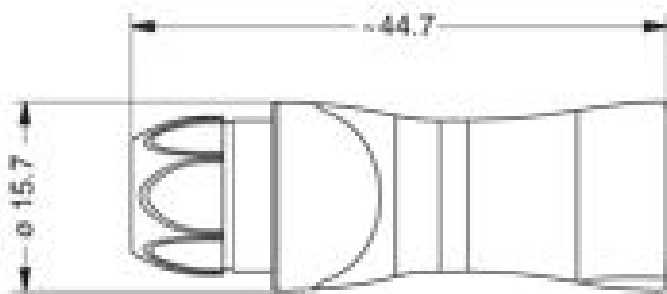

### Dimensions

	A	L
mm.	15.7	46.7
in.	0.62	1.84

---

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V

### Cables