

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)
[XRN.M22.GLL.6GZ](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

XRN.M22.GLL.6GZ

SUMMARY

Wires

| | |
|---------|----|
| Low | 22 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Download

[Request a quote](#)

[Catalog](#)

Series

| | |
|------------------|----------------|
| Termination type | Female solder |
| IP rating | 50 |
| Cable Ø | 5.30 - 6.50 mm |
| Matching parts | xxx |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | XR*: Free socket, key (N) or keys (P, S and T), with grey cable collet |
| Keying | 3 key (alpha=30, plug: male contacts, receptacle: female contacts) |
| Housing Material | |
| Cable Fixing | ∅ 5.3 - 6.5 mm |
| Variant | GZ : Gray collet nut for bend relief |

Performance

| | |
|---------------|----------------------|
| Configuration | M22 : 22 Low Voltage |
| Insulator | L: PEEK |
| Rated Current | |

Specifications


| | |
|---|-----|
| Test voltage (kV rms) Contact-contact: | 0.6 |
| Air clearance min. (mm) or Creepage distance min. (mm): | 0.4 |

Others

| | |
|----------------------|--------------------------|
| F ret (average): | 130 N |
| Working temperature: | -50 deg C to + 170 deg C |
| IP Rating: | 50 |

DRAWINGS

Draws

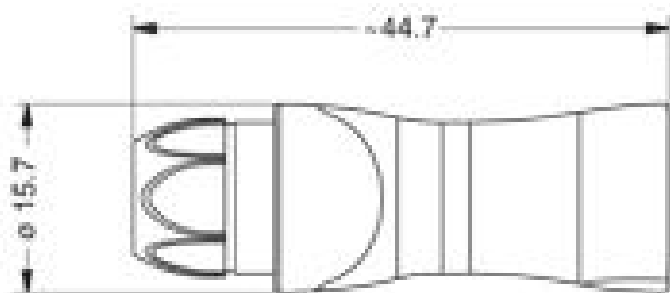

Dimensions

| | A | L |
|-----|------|------|
| mm. | 15.7 | 46.7 |
| in. | 0.62 | 1.84 |

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Cables