

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[0795752004](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

- MATERIAL:
 - OVER MOLD - POLYBUTYLENE TEREPHTHALATE (PBT), 94-V0. GLASS FILLED 30%.
 - LATCH - STAINLESS STEEL ALLOY.
 - CABLE -
 - SIGNALS PVC INSULATION
 - SOLID COPPER SIGNAL AND DRAIN
 - INNER DIELECTRIC IS POLYOLEFIN
 - TWIN-AX SHIELD IS ALUMINIZED POLYESTER FOIL.
 - JACKET - PVC RED
 - PCB - FR4
- PRODUCT TO PERFORM PER
- PRODUCT SPECIFICATION: PS-79536-001.
- PACKAGING: BULK PACK PER PK-79536-XXX.
- PRODUCT MATES TO 75783 (RIGHT ANGLE) AND 75784 (VERTICAL) SERIES.
- THIS PRODUCT CONFORMS TO THE MECHANICAL DIMENSIONING AND ELECTRICAL PERFORMANCE REQUIREMENTS OF SFF-8086 AND SFF-8087.
- MINIMUM RECOMMENDED RADIUS 28 MM.
- PRODUCT IS RoHS COMPLIANT.
- LENGTHS OVER 1 METER ARE NOT COMPLIANT WITH SAS 1.1 09E SPECIFICATION.
- LABEL INFO
 - MOLEX
 - <<PART NUMBER>>
 - MADE IN CHINA
 - WW/YY

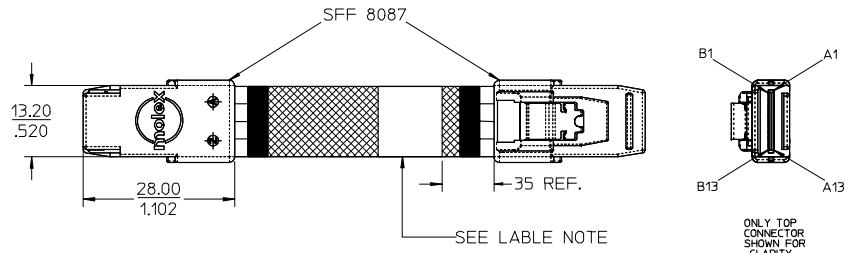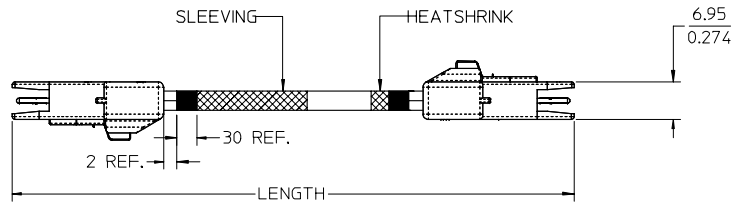

MATERIAL #	AWG	LENGTH(M)	TOL (+/-)
79575-2000	30	0.152	0.015
79575-2001	30	0.300	0.015
79575-2002	30	0.500	0.015
79575-2003	30	0.600	0.015
79575-2004	28	1.000	0.030
79575-2005	28	2.000	0.030

ENTER DESCRIPTION EC NO. USY2006-0236 TIDRINA/PHILLIPS CHKCD: T.HALL APPRO: DUE	2006/02/08 2006/02/01 2006/02/07	QUALITY SYMBOLS ▽=0 ▽=0
---	--	-------------------------------

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.010
2 PLACES	±0.25	±---
1 PLACE	±---	±---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART
--	-----------

DIMENSION STYLE MM/IN	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
DRAWN BY JERWIN	DATE 2005/10/27	CHECKED BY THALL	DATE 2005/10/27
APPROVED BY DOOYE	DATE 2005/10/27	MATERIAL NO. SEE CHART	

IPASS™ IS A TRADEMARK OF MOLEX


TITLE: IPASS (MINI-SAS) INTERNAL CABLE 26 CKT, 4X

MOLEX INCORPORATED

DOCUMENT NO. SD-79575-200

SHEET NO. 1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

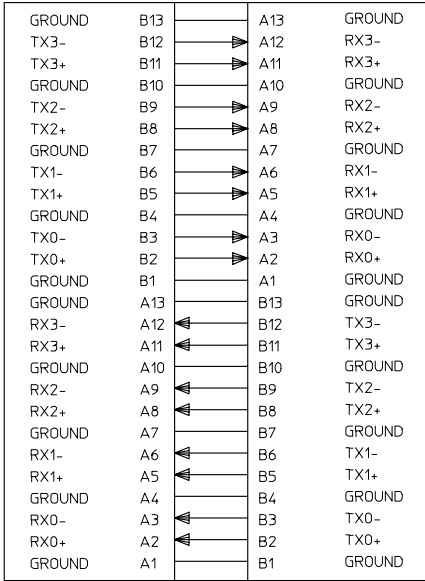

NOTE:

- PIN OUT CONFORMS TO SAS 1.1 9.0D SECTION 5.2.4.1.2.3
- ALL SIGNAL GROUNDS ARE BUSSED IN PCB. PINS A1, A13, B1, & B13 DO NOT HAVE CORRESPONDING SOLDER PADS.

IPASS™ IS A TRADEMARK OF MOLEX

INITIAL RELEASE EC NO: USY2006-0236 T1: DRINKPHILLIPS 2006/02/01 CHKD: T. HALL 2006/02/01 APPR: DDOYE 2006/02/07	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	DRAWN BY JERWIN	DATE 2005/10/27	TITLE IPASS™ (MINI-SAS) INTERNAL CABLE 26 CKT, 4X			
		2 PLACES ± 0.25 ± ---	1 PLACE ± --- ± ---	CHECKED BY THALL	DATE 2005/10/27	MOLEX MOLEX INCORPORATED			
		ANGULAR ±1/2°		APPROVED BY DDOYE	DATE 2005/10/27	MATERIAL NO.	DOCUMENT NO. SD-79575-200	SHEET NO. 2 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				