

Excellent Integrated System Limited






Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[302-R101](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

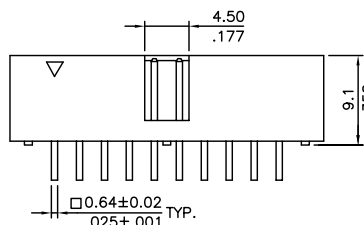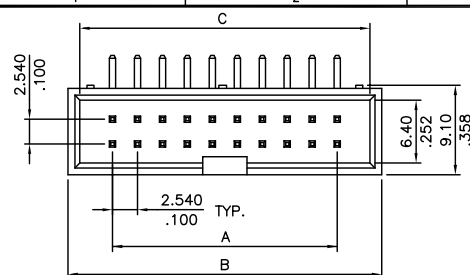


$$A = 2.54 * \text{No. of Spaces}$$

$$B = A + 10.16$$

$$C = A + 7.86$$

* Available circuits: 06, 08, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64



Recommended P.C. Board Layout

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Insulator: Glass Filled Polyester
- Flammability: UL94V-0
- Color: Black
- Contacts: Brass
- Plating termination: 1.2u" Au min, 50u" Ni

Ratings

- Current: 3A
- Voltage: 250V AC(r.m.s.)
- Contact Resistance: <20mΩ
- Insulation Resistance: >1,000MΩ
- Dielectric Withstanding: Voltage: 1500V AC for one minute
- Operating Temperature: -40°C ±105°C
- Solderability: 245°C ± 5°C for 3±0.5 seconds

RoHS Compliant

PLATING

1= Full Gold Flash/Nickel (STD)
5 = 120u" Tin over 50u" Nickel
7 = Selective 15u" Gold/Nickel
8 = Selective 30u" Gold/Nickel
NON-STD may require MOQ

PART NUMBER:

302-RXXX

Number of circuits

Dim. D

3.10 - leave blank (standard)

2.80 - add 2.8 to end of p/n

may require MOQ



ON-SHORE TECHNOLOGY, INC.

TITLE					
302 Series - Dual Row Right Angle Box Header					
PART NO.	302-RXXX			DWG NO.	302-RXXX.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
	Marvin 2003.06.16	Marvin 2003.06.16	Marvin 2003.06.16	Tolerance	
				UNIT: mm/inches	X ±0.30/012
				SCALE: NONE	XX ±0.20/008
				SHEET: 01/01	XX ±0.10/004
				REV.: B	X* ±1*