

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0050375023](#)



For any questions, you can email us directly:

sales@integrated-circuit.com


ENG. NO.
SD-5264-N

EDP NO.
50-37-5**3

1MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

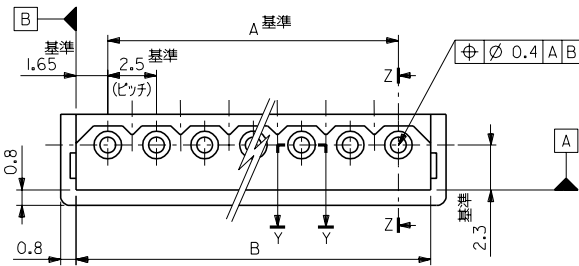

断面 Z-Z







断面 Y-Y

注記:

1. 適合端子: 5263PBT

2. 嵌合相手: 5267シリーズ, 5268シリーズ

△ 9極以上はロックなし。

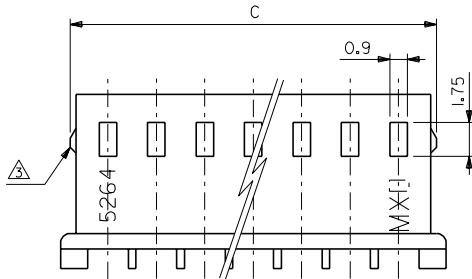

CIRCUIT NO.

角度	ANGLE	±3°
30以上 OVER	±0.3	
10以上 30未満 OVER UNDER	±0.25	
10未満 UNDER	±0.2	
一般公差 GENERAL TOLERANCES		

材料 MATERIAL	66ナイロン UL94V-0
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY	K.T.O.J.D.
CHK'D BY	M.FUKUSHIMA
DATE	9/17/26
APPR'D BY	M.MENOMOTO
REVISION RECORD	

38.3	35	50-37-5153	5264-15	15
35.8	32.5	↑ -5143	↑ -14	14
33.3	30	↑ -5133	↑ -13	13
30.8	27.5	↑ -5123	↑ -12	12
28.3	25	↑ -5113	↑ -11	11
25.8	22.5	↑ -5103	↑ -10	10
23.3	20	↑ -5093	↑ -09	9
21.4	20.8	↑ -5083	↑ -08	8
18.9	18.3	↑ -5073	↑ -07	7
16.4	15.8	↑ -5063	↑ -06	6
13.9	13.3	↑ -5053	↑ -05	5
11.4	10.8	↑ -5043	↑ -04	4
8.9	8.3	↑ -5033	↑ -03	3
6.4	5.8	↑ -5023	↑ -02	2
C	B	A	EDP NO.	ENG.NO.



材料 MATERIAL	66ナイロン UL94V-0
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY	K.T.O.J.D.
CHK'D BY	M.FUKUSHIMA
DATE	9/17/26
APPR'D BY	M.MENOMOTO
REVISION RECORD	

MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
EDP. NO. 50-37-5**3
ENG. NO. SD-5264-N
REV H
TITLE 名称 2.5 LOW PROFILE RECEPTACLE HOUSING


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。

MXJ-8

10 9 8 7 6 5 4 3 2 1

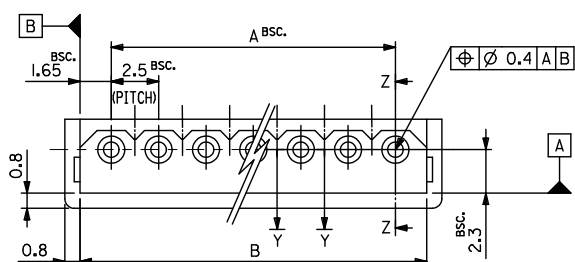




SECT.Z-Z



SECT.Y-Y


NOTES:

1. SUITABLE TERMINAL : 5263SERIES
2. MATES WITH : 5267SERIES, 5268SERIES
3. 9 CIRCUITS OR MORE WITHOUT LOOK.

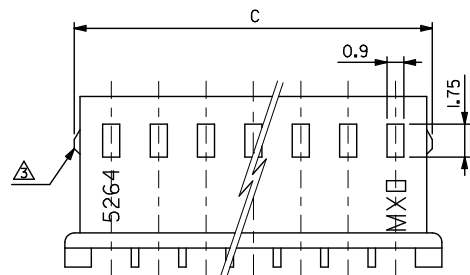

	48.3	45	50-37-5193	5264-19	19	
	43.3	40	▲ -5173	▲ -17	17	
	38.3	35	-5153	-15	15	
	35.8	32.5	-5143	-14	14	
	33.3	30	-5133	-13	13	
	30.8	27.5	-5123	-12	12	
	28.3	25	-5113	-11	11	
	25.8	22.5	-5103	-10	10	
	23.3	20	-5093	-09	9	
	21.4	20.8	17.5	-5083	-08	8
	18.9	18.3	15	-5073	-07	7
	16.4	15.8	12.5	-5063	-06	6
	13.9	13.3	10	-5053	-05	5
	11.4	10.8	7.5	-5043	-04	4
	8.9	8.3	5	-5033	-03	3
	6.4	5.8	2.5	50-37-5023	5264-02	2
0	C	B	A	FDP NO.	ENG.NO.	CKT.

MATERIAL:
66 NYLON, UL94V-0



CIRCUIT NO.

PART NUMBERS VOIDED
EC NO. J2016-1314
DRAWING CHKO: 2016/06/29
APPR: Y0110 2016/07/08

GENERAL TOLERANCES (UNLESS SPECIFIED)		
0.25 UNDER	±0.03	
0.25 OVER	±0.05	
0.5 UNDER	±0.1	
0.5 OVER	±0.3	
1.0 UNDER	±0.25	
1.0 OVER	±0.2	
30 UNDER		
30 OVER		
ANGULAR	±3 °	

DIMENSION STYLE
MM ONLY
DRAWN BY K. TOJO DATE 1991/11/05
CHECKED BY M. FUKUSHIMA DATE 1992/01/15
APPROVED BY M. ENOMOTO DATE 1992/01/15
MATERIAL NO.
SEE CHART

SCALE 5:1
DESIGN UNITS METRIC
THIRD ANGLE PROJECTION
TITLE 2.5 LOW PROFILE RECEPTACLE HOUSING
DOCUMENT NO. SD-5264-N
SHEET NO. 1 OF 1

9 8 7 6 5 4 3 2 1