

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Littelfuse](#)
[59030-010](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

System No. 16106

PROPRIETARY NOTE: This drawing and all information thereon is the property of Breed Technologies, Inc. and is confidential and proprietary and must not be made public or copied unless expressly authorized in writing by Breed Technologies, Inc. and is subject to return upon demand.

D10-59030-010

Electrical




CONTACT TYPE:
CONTACT RATING:
SWITCHING VOLTAGE, MAX.
SWITCHING CURRENT, MAX.
CARRY CURRENT, MAX.
CONTACT RESISTANCE INCLUDING LEADS, MAX.
BREAKDOWN VOLTAGE, MIN.

FORM A
10 WATTS
150 VDC
0.25 AMPS
0.50 AMPS
200 mΩ
250 VDC

Physical


CAPSULE:
POTTING:
LEADS:
ACTUATOR:
ACTUATE DISTANCE:
DEACTUATE DISTANCE:

BLACK UL94V-0 POLYESTER
BLACK EPOXY
WIRE PVC 24 AWG 7/32 UL1569 BLACK
57030-000
.150" MIN.
.800" MAX.

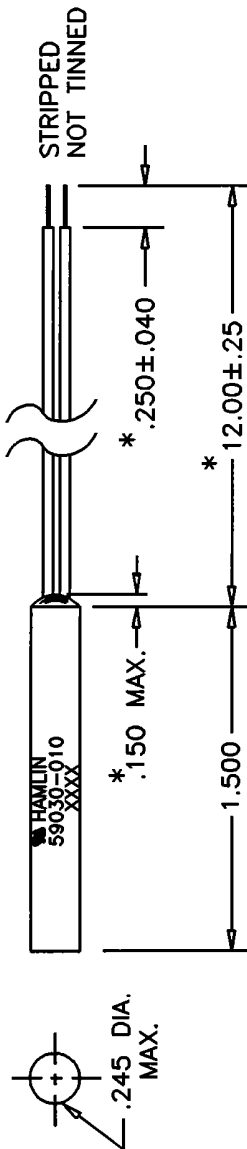

DIMENSIONS ARE IN INCHES
TOLERANCES: ±.010 UNLESS NOTED
* KEY ASSEMBLY DIMENSIONS

Print Detail

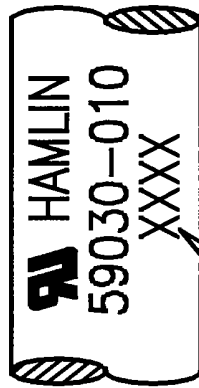

4 DIGIT DATE CODE

59030-010 SENSOR

Hamlin
Breed Electronics Limited Partnership

DCR No. 1243

AF UPDATE/FROMAT

A9433

3/13/02

DATE 5/2/88

D10-59030-010

REV. DESCRIPTION OF REVISION

DCR No.

BY

DATE

APP'd

DATE 5/11/88

Page 1 of 1