

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:







[Molex Connector Corporation](#)
[5018645090](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

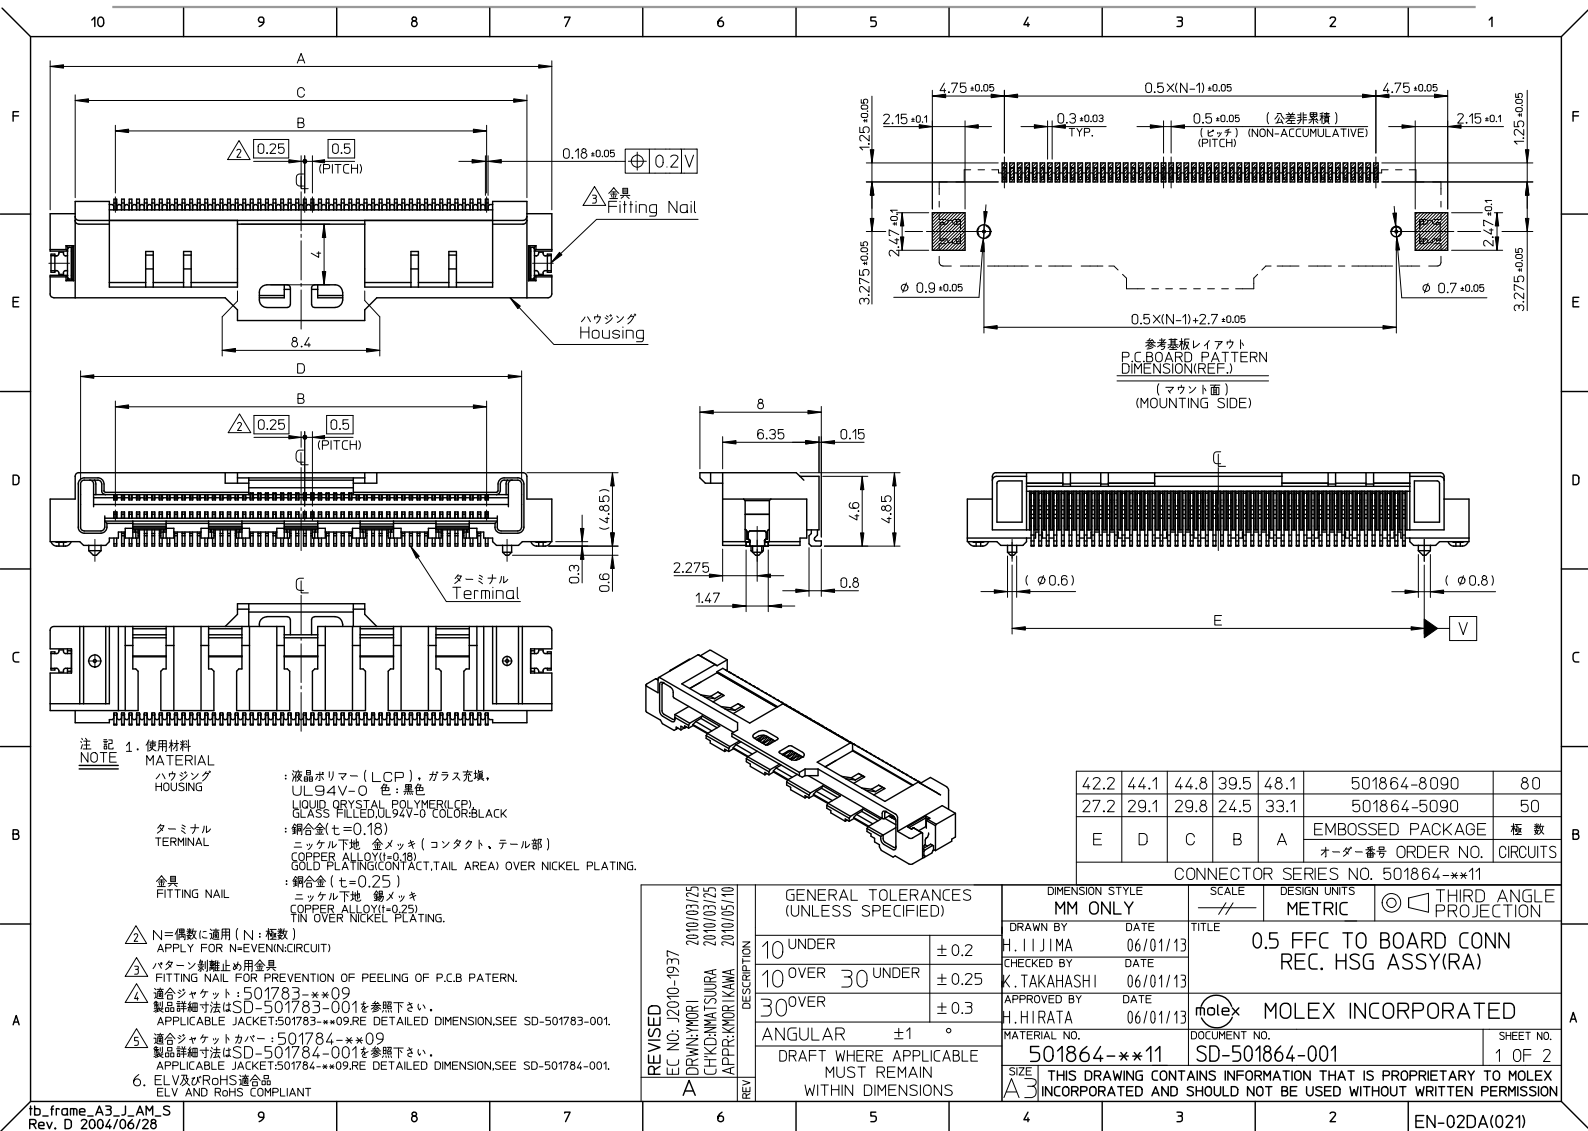

10 9 8 7 6 5 4 3 2 1

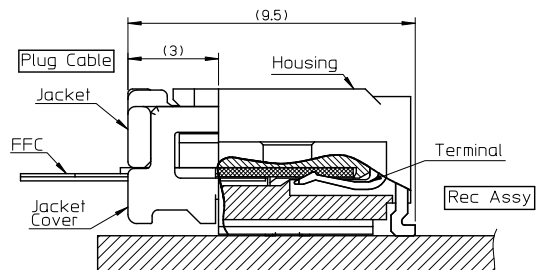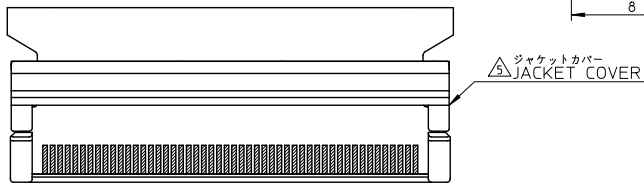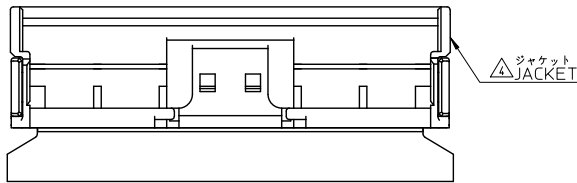




嵌合断面図

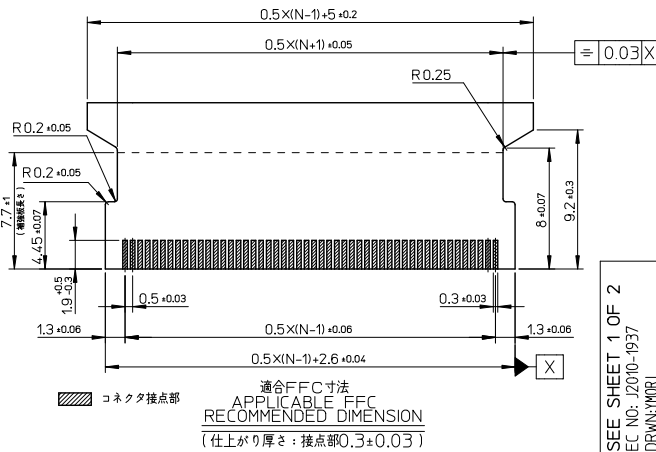


SEE SHEET 1 OF 2 EC NO. 12010-1937 DRAWN: YORI CHKD: NAKA SUIRA APPR: KORI KAMA 2010/03/25 2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE #	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY H. IJIMA	DATE 06/01/13	TITLE 0.5 FFC TO BOARD CONN REC. HSG ASSY(RA)			
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/13				
		30 OVER	± 0.3	APPROVED BY H. HIRATA	DATE 06/01/13				
		ANGULAR	± 1 °	MATERIAL NO. 501864-**11		MOLEX MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOCUMENT NO. SD-501864-001		SHEET NO. 2 OF 2			
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

NOTES


1. 梱包数量: 900 個/リール
NUMBER OF CONNECTORS: 900 PCS/REEL
2. リードテープ長さ
LEAD TAPE LENGTH

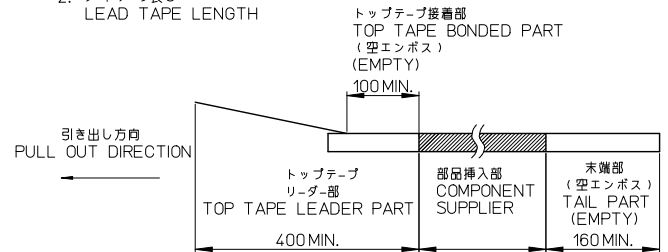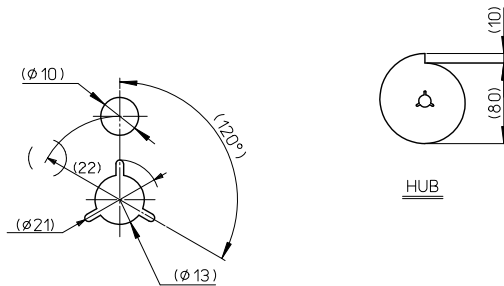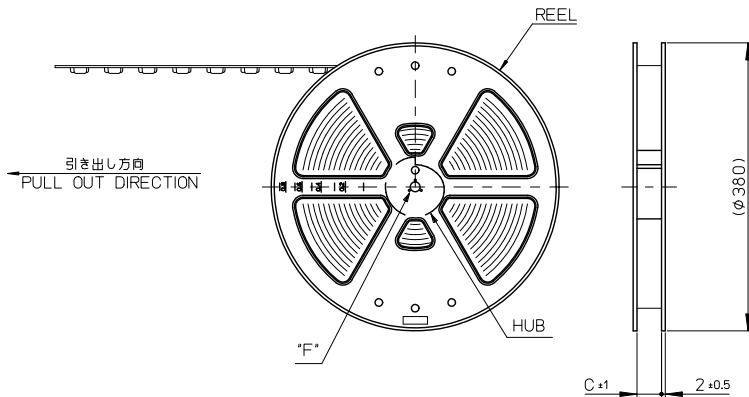

3. トップテープの剥離強度: 0.1~1.27N(10~130gf)
(剥離方向は下図参照)
剥離速度: 300mm/MIN. (参考)
PEEL-OFF FORCE OF TOP TAPE: 0.1~1.27N(10~130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
4. 製品詳細寸法については図面 SD-501864-001を参照下さい。
RE DETAILED DIMENSION, SEE SD-501864-001.
5. 材料(MATERIAL)
キャリアテープ(CARRIER TAPE): ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE): PET, PE, PE
リール(REEL): ポリスチレン(POLYSTYRENE)
6. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT



REVISED EC NO. J2010-1937 DRAWN BY CHYOKAWATSURA CHECKED BY APPR. BY KIRIKAWA	2010/03/25 2010/03/25 2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			10 UNDER 10 OVER 30 UNDER 30 OVER ANGULAR ±1 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY H. IJIMA	DATE 06/01/17	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD CONN RA TYPE MOLEX MOLEX INCORPORATED				
				CHECKED BY K. TAKAHASHI	DATE 06/01/17					
				APPROVED BY H. HIRATA	DATE 06/01/17					
				MATERIAL NO. 501864-**-90		DOCUMENT NO. SD-501864-003		SHEET NO. 1 OF 2		
REV			SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

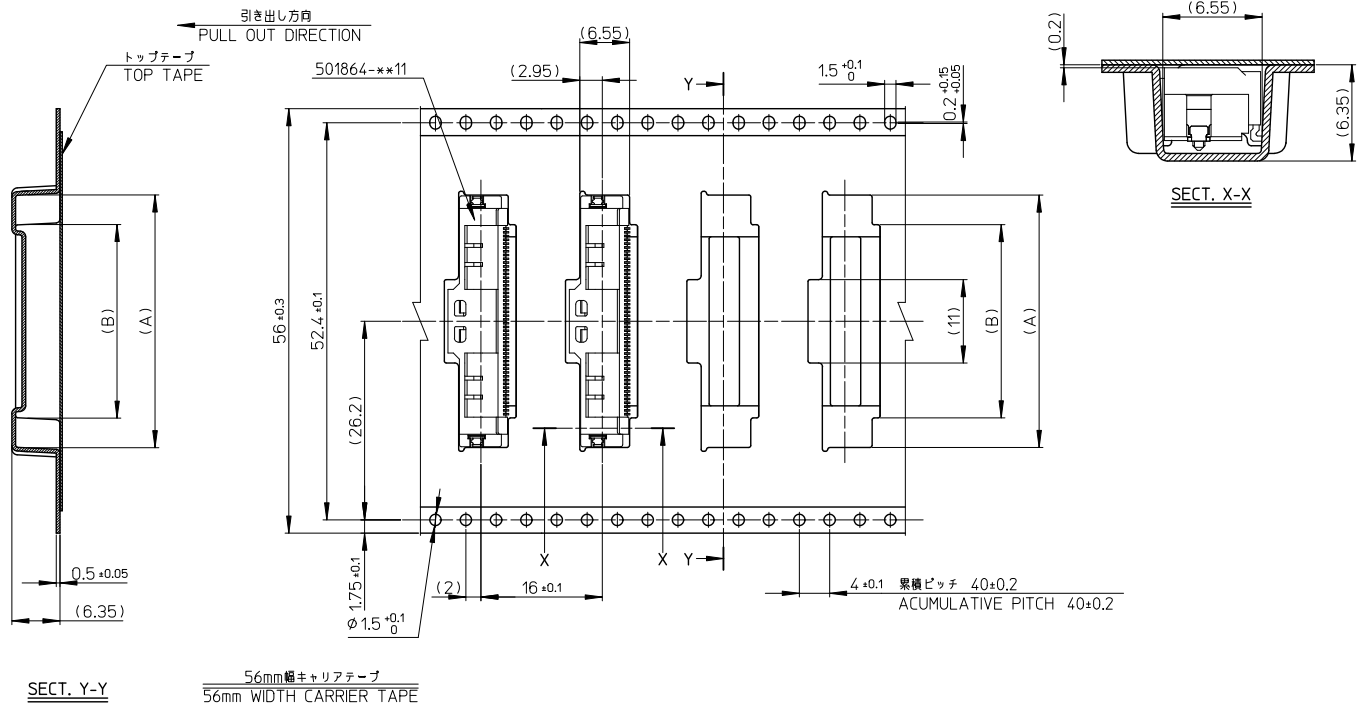

56	57.4	25.5	33.3	501864-5090	50
キャリアテープ幅	C	B	A	オーダー番号	板数
CARRIER TAPE WIDTH				ORDER NO.	CKT

SEE SHEET 1 OF 2	EC NO. J2010-1937 DRAWN BY: MORI CHKD: MATSUURA APPR: MORIKAWA	2010/03/25 2010/03/25 2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD CONN RA TYPE MOLEX INCORPORATED
				10 UNDER	±0.2	DRAWN BY H. IJIMA	DATE 06/01/17				
				10 OVER 30 UNDER	±0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/17				
				30 OVER	±0.3	APPROVED BY H. HIRATA	DATE 06/01/17				
	REV A	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	NEW	ANGULAR	±1	MATERIAL NO. 501864-**90	DOCUMENT NO. SD-501864-003	SHEET NO. 2 OF 2			
				SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							