

Excellent Integrated System Limited

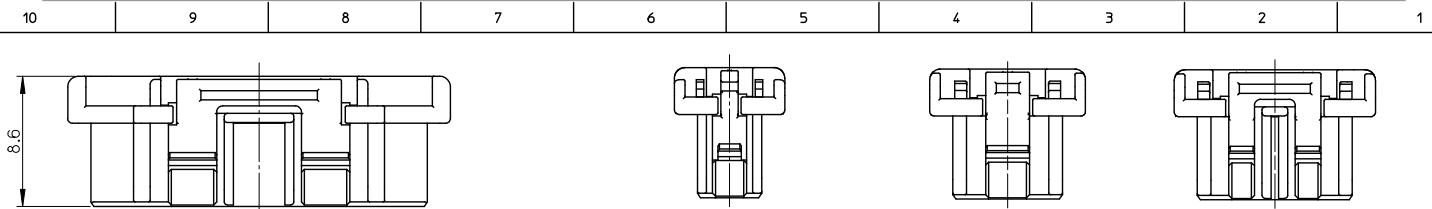
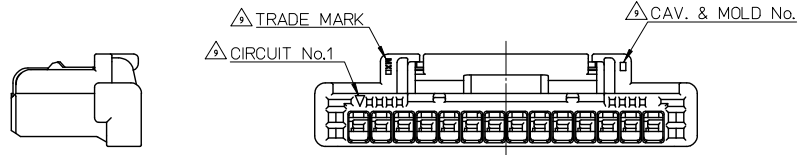
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[5025781300](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

2,3極形状 (1ロック)
FIGURE OF 2,3 CIRCUIT (1 LOCK)4,5極形状 (1ロック)
FIGURE OF 4,5 CIRCUIT (1 LOCK)6極形状 (2ロック)
FIGURE OF 6 CIRCUIT (2 LOCK)

NOTES

1. 材料 MATERIAL
ハウジング : PBT , UL94-V0
HOUSING : PBT , UL94-V0
2. 嵌合相手 : 502584, 502585, 503159, 503175, 503339, 503340, 503395, 505405 シリーズ
MATE WITH : 502584, 502585, 503159, 503175, 503339, 503340, 503395, 505405 SERIES.
3. 適合ターミナル : 503429, 503429 シリーズ
APPLICABLE TERMINAL : 503429, 503429 SERIES.
4. 極数/2=偶数極の場合に適用
APPLY FOR (CIRCUIT/2)=EVEN
5. 注文番号
ORDER No.
502578-****
CIRCUIT SIZE 極数 色
6. 本製品のプラスチック部に黒点・白点等が確認される場合や色合いが異なる場合がありますが、製品性能に影響はありません。
THERE IS NO INFLUENCE IN THE PRODUCT PERFORMANCE THOUGH THE BLACK AND WHITE SPOT ETC. MIGHT BE CONFIRMED TO THE PLASTIC PART OF THIS PRODUCT AND THE SHADE MIGHT BE DIFFERENT.
7. アプリケーション仕様書(コネクタ取扱説明書) : AS-502578-001, AS-502578-002
APPLICATION SPECIFICATIONS (CONNECTOR MANUAL): AS-502578-001, AS-502578-002
8. 製品仕様書 : PS-502584-001
Product specification: PS-502584-001
9. トレードマーク : M プラス 2 文字の製造工場を示すアルファベットにて表示。
但し、「J」は JAPAN を「L」は MALAYSIA を示す。(例 M X J 又は M X L)
金型番号 : アルファベット 1 文字にて表示。(例 1A, 12A, 1B, 12B)
FORMED BY M AND FROM 1 TO 2 MORE LETTER OF ALPHABET WHICH MEAN THE MANUFACTORY.
BUT 「J」 MEANS JAPAN. 「L」 MEANS MALAYSIA (TO TRADE MARK) (eg. M X J OR M X L).
AND BY 1 - 2 DIGIT NUMBER (TO CAVITY NO.) AND BY 1 LETTER OF ALPHABET (TO MOLD NO.) (eg. 1A, 12A, 1B, 12B).
10. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT

No.	COLOR	CIRCUIT
00	ベージュ BEIGE	2~15
01	黒 BLACK	
02	赤 RED	
03	黄 YELLOW	
04	青 BLUE	
05	桃 PINK	
06	緑 GREEN	
07	茶 BROWN	
08	橙 ORANGE	
09	紫 VIOLET	
11	灰 GRAY	3~5
16	黄緑 YELLOWISH GREEN	
14	水 PALE BLUE	2~5

21	26.8	50257815**	15
19.5	25.3	14**	14
18	23.8	13**	13
16.5	22.3	12**	12
15	20.8	11**	11
13.5	19.3	10**	10
12	17.8	09**	9
10.5	16.3	08**	8
9	14.8	07**	7
7.5	13.3	06**	6
6	11.8	05**	5
4.5	10.3	04**	4
3	8.8	03**	3
1.5	7.3	50257802**	2
B	A	PLASTIC BAG ORDER No.	CIRCUIT No.

REVISED EC NO. J2015-0528 DRAWN: FAKA IKE CHKD: ASAKAWA APP: NUKITA	DESCRIPTION 2014/10/20 2015/02/16 2015/02/16	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		0.25 UNDER		±0.03	DRAWN BY	DATE	TITLE 1.5MM W/B CONN. SINGLE PLUG HOUSING molex DOCUMENT NO. SD-502578-001 SHEET NO. 1 OF 1			
		0.25 OVER	0.5 UNDER	±0.05	N. ITO	'07/07/09				
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE				
		1.0 OVER	10 UNDER	±0.2	K. ASAKAWA	'07/07/10				
		10 OVER	30 UNDER	±0.25	APPROVED BY	DATE				
		30 OVER		±0.3	Y. ITO	'07/07/10	MATERIAL NO.			
		ANGULAR	±3 °	±0.3	MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
					SEE TABLE					