

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[5031491000](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



10 9 8 7 6 5 4 3 2 1

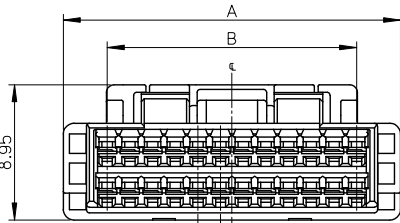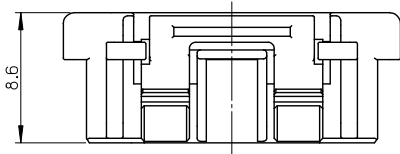

10CKTのロック形状
FIGURE OF 10 CIRCUIT



8CKTのロック形状
FIGURE OF 8 CIRCUIT

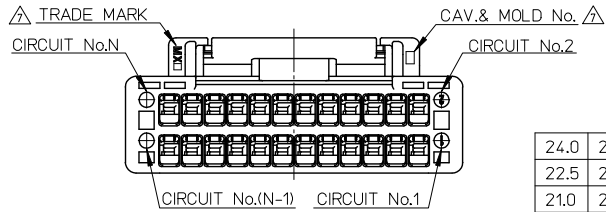

24.0	29.8	△ 503149340*	34
22.5	28.3	503149320*	32
21.0	26.8	503149300*	30
19.5	25.3	503149280*	28
18.0	23.8	503149260*	26
16.5	22.3	503149240*	24
15.0	20.8	503149220*	22
13.5	19.3	503149200*	20
12.0	17.8	503149180*	18
10.5	16.3	503149160*	16
9.0	14.8	503149140*	14
7.5	13.3	503149120*	12
6.0	11.8	503149100*	10
4.5	10.3	503149080*	8
B	A	MATERIAL AND ORDER No. △	CIRCUIT No.

REVISED IEC No. J2015-0528 DRAWN: TAKA KE 2014/10/23 CHKD: KASAKAWA 2015/02/16 APPR: NUKITA 2015/02/16	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	0.25 UNDER	±0.03	DRAWN BY	DATE	TITLE 1.5 W/B CONN. DUAL PLUG HOUSING molex DOCUMENT NO. SD-503149-001 SHEET NO. 1 OF 2		
	0.25 OVER 0.5 UNDER	±0.05	T. HANYU	2008/1/8			
	0.5 OVER 1.0 UNDER	±0.1	CHECKED BY	DATE			
1.0 OVER 3.0 UNDER	±0.2	K. ASAKAWA	2008/1/8				
3.0 OVER	±0.25	APPROVED BY	DATE	MATERIAL NO. SEE TABLE			
ANGULAR	±1 *	YO. ITO	2008/1/8	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE					

9 8 7 6 5 4 3 2 1

10 9 8 7 6 5 4 3 2 1

NOTES



1. 材料 PBT UL94V-0
MATERIAL
- ④ 2. 適合相手: 503148, 503154, 505406シリーズ
MATE WITH: 503148, 503154, 505406 SERIES
3. 適合ターミナル: 502579, 503429シリーズ
APPLICABLE TERMINAL: 502579, 503429 SERIES
- △ 極数/2=偶数極の場合に適用
APPLY FOR (CIRCUIT/2=EVEN
極数)
- △ 製品番号
MATERIAL No.

503149 - **0*

極数 ↑ 色 ↑
CIRCUIT SIZE COLOR

COLOR	黒	赤	青	緑	ベージュ BEIGE (NATURAL)
BLACK	RED	BLUE	GREEN		
COLOR No.	1	2	4	6	0

6. 本製品のプラスチック部に黒点・白点等が確認される場合や色合いが異なる場合がありますが、製品性能に問題はありません。
THERE IS NO INFLUENCE IN THE PRODUCT PERFORMANCE THOUGH THE BLACK AND WHITE SPOT ETC. MIGHT BE CONFIRMED TO THE PLASTIC PART OF THIS PRODUCT AND THE SADE MIGHT BE DIFFERENT.
- △ トレードマーク:Mプラス 2文字の製造工場を示すアルファベットにて表示。
*但し、"J"はJAPANを、"L"はMALAYSIAを示す。(例:MXJ,又はMXL)
*金型番号:アルファベット1文字にて表示。(例:1A, 12A, 1B, 12B)
FORMED BY M AND FROM 1 TO 2 MORE LETTER OF ALPHABET WHICH MEAN THE MANUFACTORY.
'BUT "J" MEANS JAPAN. "L" MEANS MALAYSIA (TO TRADE MARK)'
(e.g. MXJ OR MXL)
AND BY 1 - 2 DIGIT NUMBER (TO CAVITY NO.)
'AND BY 1 LETTER OF ALPHABET (TO MOLD NO.)'(e.g. 1A, 12A, 1B, 12B).'
8. アプリケーション仕様書(コネクタ取扱説明書): AS-503149-001
APPLICATION SPECIFICATIONS (CONNECTOR MANUAL): AS-503149-001
9. 製品仕様書: PS-503148-001 / PS-503154-001
PRODUCT SPECIFICATION: PS-503148-001 / PS-503154-001
10. ELV及びRoHS適合品
ELV AND ROHS COMPLIANT
△ ④ 3ヶ極品の色対応はベージュと黒色のみとなります。
A COLOR OF 34CKT. IS ONLY BEIGE AND BLACK.

REVISED IEC NO: J2015-0528 2014/10/23 DRAWN:TAKAIKE CHK:KASAKAWA 2015/02/16 APPR:NIKI,ITA 2015/02/16 H REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	0.25 UNDER	±0.03	DRAWN BY T.HANYU	DATE 2008/1/8	TITLE 1.5 W/B CONN. DUAL PLUG HOUSING		
	0.25 OVER 0.5 UNDER	±0.05	CHECKED BY K.ASAKAWA	DATE 2008/1/8			
	0.5 OVER 1.0 UNDER	±0.1	APPROVED BY YU. ITO	DATE 2008/1/8			
	1.0 OVER 10 UNDER	±0.2	MATERIAL NO. SEE SHEET 1		DOCUMENT NO. SD-503149-001	SHEET NO. 2 OF 2	
10 OVER 30 UNDER	±0.25	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
30 OVER	±0.3	SIZE  THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1