

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[10118075-513B010LF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

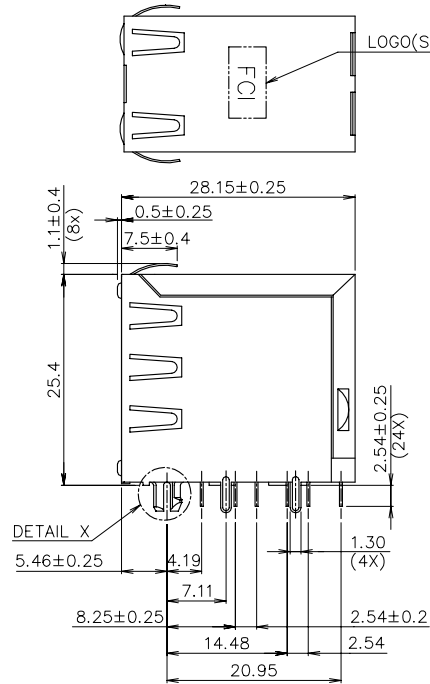
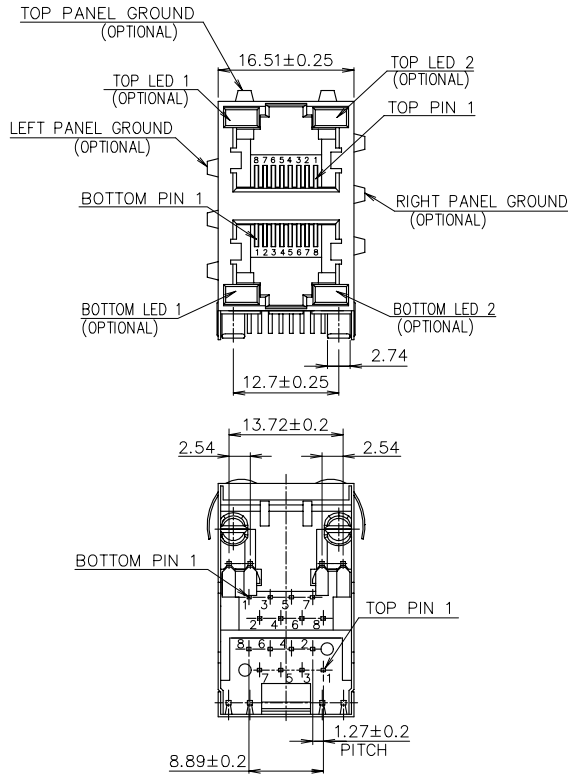


LOGO(SEE NOTE 3)


PRINT P/N & DATE CODE
(SEE NOTE 4)



mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ec	no	dr	date	tolerances unless otherwise specified	MM [INCH]	GANGED MJACK
A		WL		11/04/11	X.X±0.25	scale	title
					X.XX±0.13		CAT 3 MULTIPORT STACKED
					X.XXX±0.05		2x1 WITH SHIELD, W/LED
			dr	WENDY CHEN 05/11/11			dwg no
			enr	WENDY CHEN 05/11/11			sheet 1 of 3
			chr	WENDY CHEN 05/11/11			size
			appd	GARY HSIEH 05/11/11			A4
sheet index	revision sheet	A	A	A			type
		1	2	3			CUSTOMER Drawing

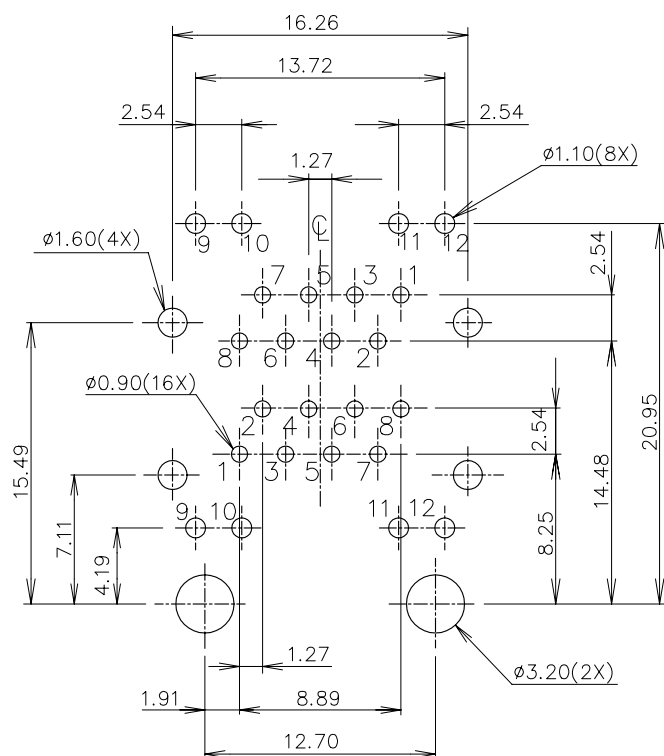

DETAIL X

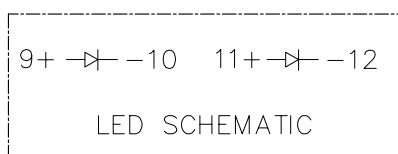

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family GANGED M/JACK			
itr ecn no dr date				tolerances unless otherwise specified				MM [INCH]		title CAT 3 MULTI-PORT STACKED 2x1 WITH SHIELD, W/LED			
A				angles b c d e f g h i j k l m n o p q r s t u v w x y z		X.X±0.25 X.XX±0.13 X.XXX±0.05		scale		dwg no 10118075			
				dr WENDY CHEN 05/11/11		engr WENDY CHEN 05/11/11				sheet 2 of 3 size A4			
				chr WENDY CHEN 05/11/11		appd GARY HSIEH 05/11/11				type CUSTOMER Drawing			
sheet index				revision sheet									

NOTE:

1. MATERIAL:
TOP HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK.
BOTTOM HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK.
CONTACTS: COPPER ALLOY.
SHIELD: COPPER ALLOY.
LED SOLDER TAIL: STEEL.
2. FINISH:
CONTACTS: 50u" MIN. NICKEL UNDER PLATED OVER ALL.
SELECTIVE GOLD PLATED ON CONTACT AREA,
1u" GOLD PLATED ON SOLDER TAIL.
LED SOLDER TAIL: 100u" MIN. BRIGHT TIN OVER
50u" NICKEL UNDER PLATED.
SHIELD: 20u" MIN. NICKEL OVER ALL.
3. LASER MARK FCI LOGO ON THE TOP OF SHIELD.
4. "DATE CODE" DESCRIPTION:


WEEK

YEAR (EX. : 10--2010)
5. PRODUCT PERFORMANCE PER SPEC. : GS-12-0990.
6. PACKING SPEC. : GS-14-2170.
7. THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED
IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.


9. PART NUMBER DESCRIPTION:

10118075-X X X X X X X LF

- LEAD FREE
- 0 : RESERVED (NOT USED)
- PACKAGING
- 1 : TRAY
- OPTIONAL BACK SHIELD TAB
- 0 : WITHOUT BACK SHIELD TAB
- OPTIONAL RIGHT / LEFT SHIELD TAB
- B : SHIELD TAB WITHOUT INNER SHIELD
- OPTIONAL PANEL GROUND
- 0 : WITHOUT PANEL GROUND
- 3 : TOP/RIGHT/LEFT 3 SIDES WITH PANEL GROUND
- LED COLOR
- 1 : LED1: GREEN / LED2: YELLOW
- 2 : LED1: YELLOW / LED2: GREEN
- 3 : LED1: GREEN / LED2: GREEN
- CONTACT AREA PLATING
- 1 : 15u" GOLD PLATING
- 2 : 30u" GOLD PLATING
- 5 : 1u" GOLD FLASH PLATING



10118075-XX0XXXXLF
(WITHOUT PANEL GROUND)



10118075-XX3XXXXLF
(3 SIDES PANEL GROUND)

mat'l. code				surface ASME Y14.5 ✓ tolerance ASME Y14.5		projection 		product family GANGED MJACK			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM [INCH]		title			
A				angles X.X±0.25 X.XX±0.13 X±1° X.XXX±0.05		scale		CAT 3 MULTIPORT STACKED 2x1 WITH SHIELD, W/L ED			
								dwg no			
				dr WENDY CHEN 05/11/11				sheet 3 of 3 size			
				engr WENDY CHEN 05/11/11				10118075 A4			
				chr WENDY CHEN 05/11/11				type CUSTOMER Drawing			
sheet index		revision sheet		appd GARY HSIEH 05/11/11							