

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity AMP Connectors](#)  
[104340-2](#)



For any questions, you can email us directly:




[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DRAWING MADE IN THIRD ANGLE PROJECTION			
THIS DRAWING IS UNPUBLISHED		RELEASED FOR PUBLICATION	
© COPYRIGHT 19		BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS	
RESERVED. AMP PRODUCTS MAY BE COVERED BY U. S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.			

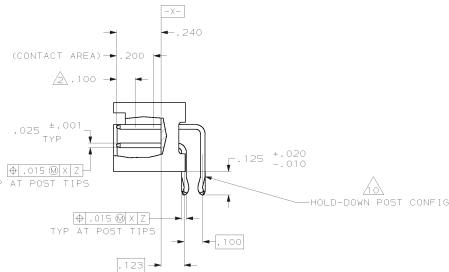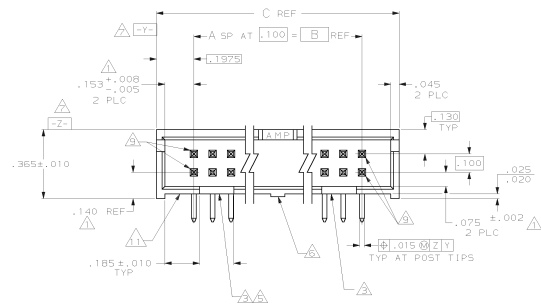


LR	APPRO	REV	DATE	BY	DESCRIPTION	DATE	APPRO
E					REV PER ECN B06865		
F					005 - 2, -3, -6, -9 1-0	03/16/14	PK
F					PER EC 0020-942-93	03/16/14	PK
D					REACTIVATED -> PER EC 0020-051-93	03/16/14	PK
H					REACTIVATED -> PER EC 0020-772-94	03/16/14	PK
J					PER EC 0020-772-94	03/16/14	PK
K					PER EC PER EC 0410-43-97	03/16/14	JGSH
L					DISOLETE -> -5, -7	03/16/14	JGSH
M					PER EC 0410-20-98	03/16/14	JGSH
N					REV PER EC 0410-36-97	03/16/14	JGSH
O					REACTIVATED -3	03/16/14	JKF
P					PER EC 0052-38-98	03/16/14	JKF
Q					REACTIVATED -5, -6, -7	03/16/14	SLB
R					PER EC 051A-0106-00	03/16/14	SLB



- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING  
POINT OF MEASUREMENT FOR PLATING THICKNESS
- DOUBLE BAR POLARIZATION
- CENTER POLARIZATION SLOT
- FOR 10 POSN ASSEMBLY, SLOT OMITTED WHERE INDICATED
- CENTER STANDOFF RIB(S) ARE OPTIONAL.
- DATUMS  AND  APPLY AT THE BASE OF THE SHROUD WALL.
- NUMBER 1 POSITION INDICATOR.
- LOCATION OF HOLD-DOWN POSTS (4 PLACES).
- THE RETENTIVE FEATURE ON THIS CONNECTOR WAS DESIGNED TO BE USED FULLY SEATED IN A CIRCUIT BOARD HAVING A THICKNESS OF .052-.077 FOR CONNECTORS HAVING RETENTIVE FEATURES DESIGNED FOR USE IN CIRCUIT BOARDS OF OTHER THICKNESSES CONTACT AMP INCORPORATED.
-  OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE).  
LOCATION APPROXIMATELY WHERE SHOWN.

OBSOLETE	3,800	2,900	29	60	1-104340-0
	2,300	2,400	24	50	104340-9
	2,300	1,900	19	40	104340-8
	2,000	1,600	16	34	104340-7
	1,500	1,200	12	26	104340-6
	1,500	1,100	11	24	104340-5
	1,300	900	9	20	104340-4
	1,100	700	7	16	104340-3
	1,000	600	6	14	104340-2
	800	400	4	10	104340-1
C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

1. NAME: <b>THUNDERBOLT</b> 2. TYPE: <b>THUNDERBOLT</b> 3. DIMENSIONS: <b>4 IN. x 4 IN. x 1/2 IN.</b> 4. WEIGHT: <b>1.0 LB.</b> 5. PL. DIMS: <b>4 IN. x 4 IN. x 1/2 IN.</b> 6. PL. WEIGHT: <b>1.0 LB.</b>		DR: <b>1-22-88</b> CR: <b>1-22-88</b> 1. TITLE: <b>THUNDERBOLT</b> 2. DATE: <b>1-22-88</b> 3. TIME: <b>2:00 PM</b> 4. BY: <b>1-22-88</b> 5. BY: <b>1-22-88</b> 6. BY: <b>1-22-88</b>		 APP INCORPORATED 1400 W. 10th St., Ft. Worth, TX 76102	
MATERIAL: <b>POLYMER, POLYESTER OF NYLON</b> POSTS: <b>POSS. BRONZE</b>		NAME:		HEADER: <b>ASSY, LOW PROFILE, HIGH TEMP, AMP-LATCH™</b>	
FINISH: <b>PAINTED</b> 1. FINISH: <b>PAINTED</b> 2. FINISH: <b>PAINTED</b> 3. FINISH: <b>PAINTED</b> 4. FINISH: <b>PAINTED</b> 5. FINISH: <b>PAINTED</b> 6. FINISH: <b>PAINTED</b>		PRODUCT SPEC: <b>108-40018</b>		SIZE: <b>108-40018</b> DRAWING NO: <b>104340</b>	
APPLICATION SPEC:		D: <b>00779</b>		<b>104340</b>	
DETAIL:		SCALE: <b>4:1</b>		SHEET: <b>1 OF 1</b>	