

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity AMP Connectors](#)
[745441-4](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

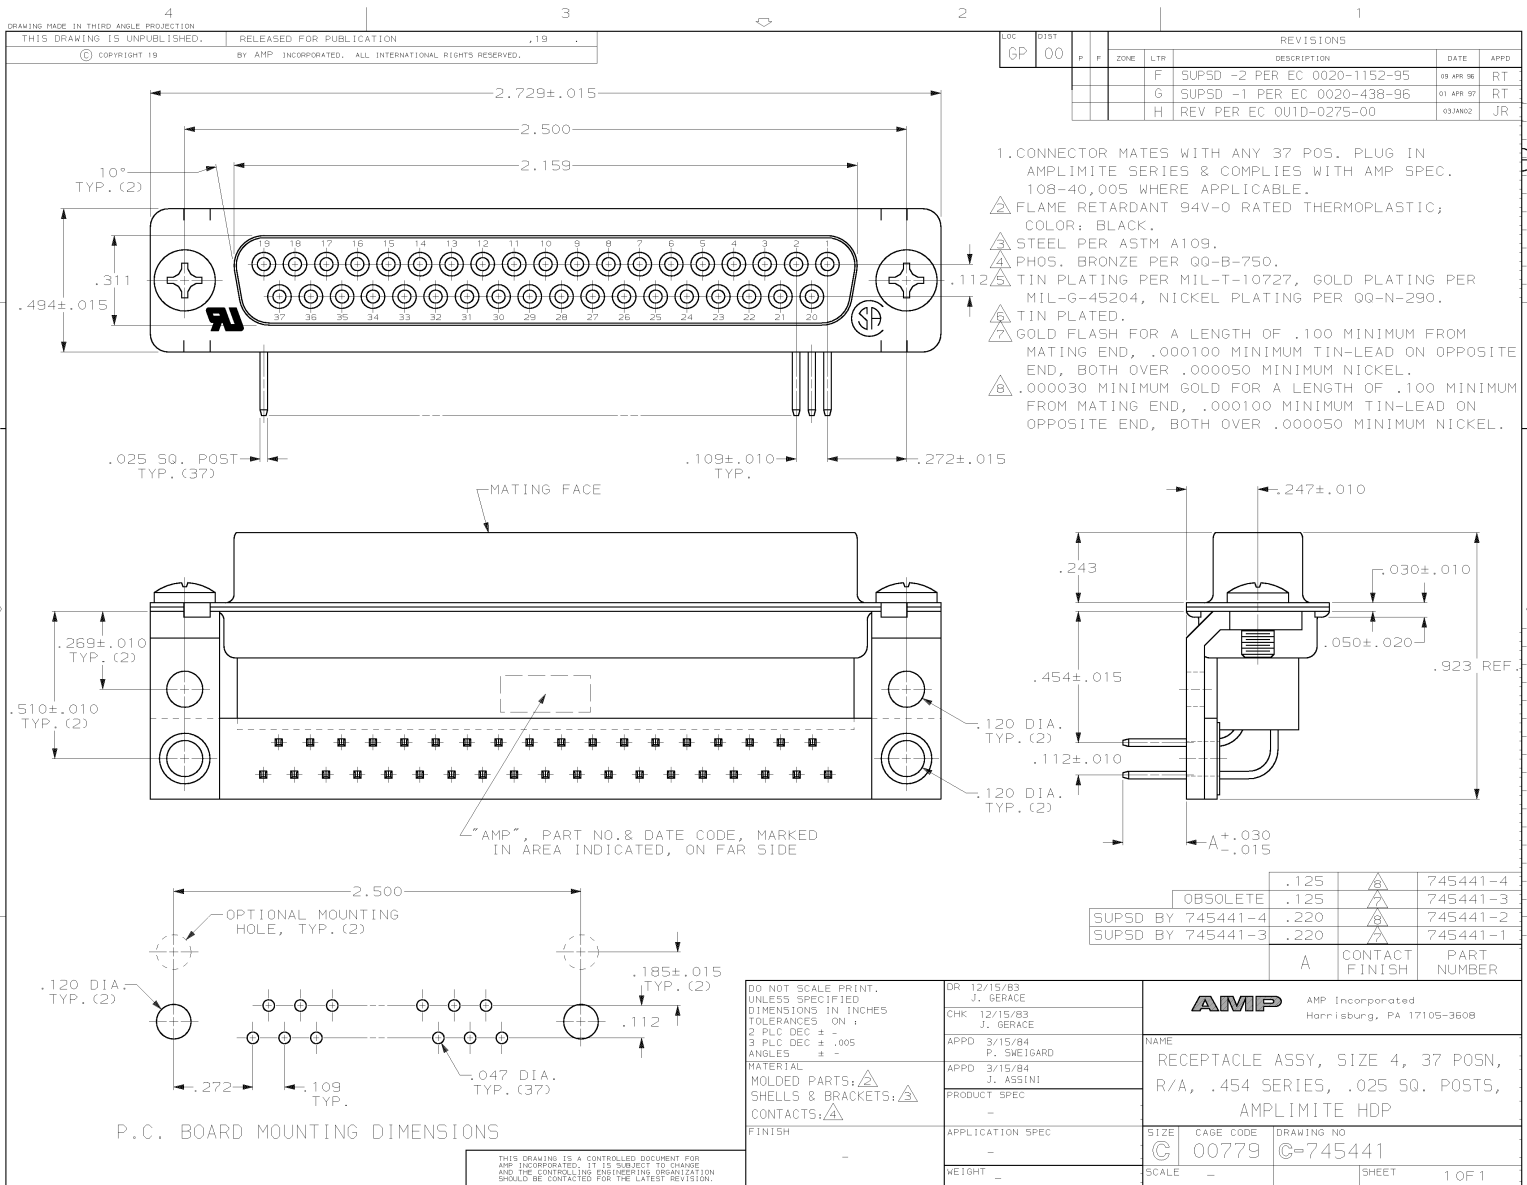

- CONNECTOR MATES WITH ANY 37 POS. PLUG IN AMPLITE SERIES & COMPLIES WITH AMP SPEC. 108-40,005 WHERE APPLICABLE.
- FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
- STEEL PER ASTM A109.
- PHOS. BRONZE PER QQ-B-750.
- TIN PLATING PER MIL-T-10727, GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290.
- TIN PLATED.
- GOLD FLASH FOR A LENGTH OF .100 MINIMUM FROM MATING END, .000100 MINIMUM TIN-LEAD ON OPPOSITE END, BOTH OVER .000050 MINIMUM NICKEL.
- .000030 MINIMUM GOLD FOR A LENGTH OF .100 MINIMUM FROM MATING END, .000100 MINIMUM TIN-LEAD ON OPPOSITE END, BOTH OVER .000050 MINIMUM NICKEL.

OBSELETE	.125	745441-4
SUPSD BY 745441-4	.125	745441-3
SUPSD BY 745441-3	.220	745441-2
	.220	745441-1

SIZE	CAGE CODE	DRAWING NO
C	00779	C=745441
SCALE	SHEET	1 OF 1

CUSTOMER DRAWING