

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0536271274](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

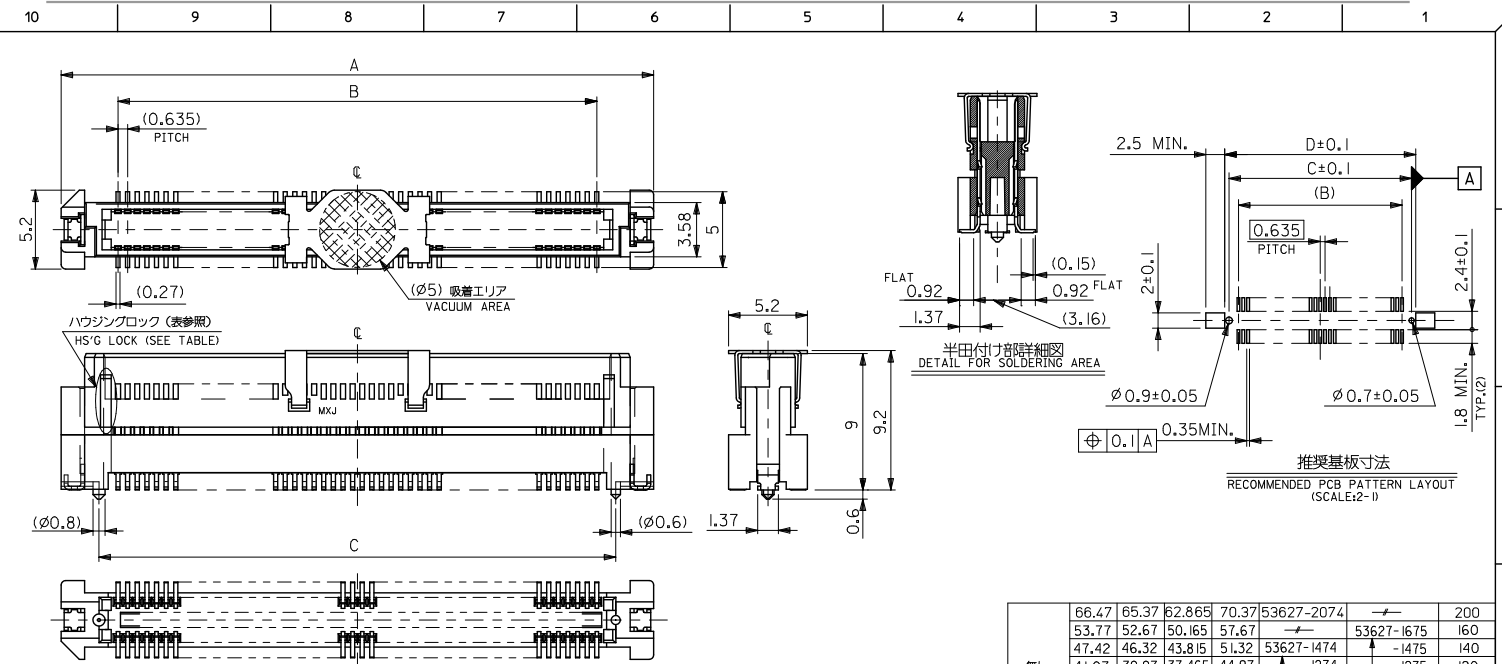

NOTES

1. 材質
MATERIAL
ハウジング: ガラス入り PPS、茶色、UL 94V-0
ハウジング: POLYPHENYLENE SULFIDE, GLASS FILLED, BROWN, UL 94V-0
ターミナル: 銅合金 (t=0.2)、ニッケルメッキ下地 1.5 マイクロメートル以上
TERMINAL: COPPER ALLOY, UNDER-PLATING NICKEL 1.5 MICROMETER MIN.
接点部: 金メッキ 0.25 マイクロメートル以上
CONTACT AREA: GOLD 0.25 MICROMETER MIN.
半田付け部: 銅メッキ 1.0 マイクロメートル以上
SOLDER TAIL AREA: TIN 1.0 MICROMETER MIN.
ネール: リン青銅 (t=0.2)、ニッケルメッキ下地 1.0 マイクロメートル以上
NAIL: PHOSPHOR BRONZE, UNDER-PLATING NICKEL 1.0 MICROMETER MIN.
鍍メッキ 1.0 マイクロメートル以上
TIN 1.0 MICROMETER MIN.
吸着カバー: ステンレス (t=0.2)
VACUUM COVER: STAINLESS STEEL

2. テールの平行度
TAIL COPLANARITY
テール平行度は、0.1 ミリ以下とする。
TAILS COPLANARITY TO BE 0.1 MILLIMETER MAX.

無し NO	66.47	65.37	62.865	70.37	53627-2074	53627-1675	200
	53.77	52.67	50.165	57.67	53627-1474	53627-1675	160
	47.42	46.32	43.815	51.32	53627-1474	53627-1675	140
	41.07	39.97	37.465	44.97	53627-1474	53627-1675	120
	34.72	33.62	31.115	38.62	53627-1474	53627-1675	100
	31.55	30.45	27.94	35.45	53627-1474	53627-1675	90
	28.37	27.27	24.765	32.27	53627-1474	53627-1675	80
	25.2	24.1	21.59	29.1	53627-1474	53627-1675	70
	22.02	20.92	18.415	25.92	53627-1474	53627-1675	60
	18.85	17.75	15.24	22.75	53627-1474	53627-1675	50
	15.67	14.57	12.065	19.57	53627-1474	53627-1675	40
	12.5	11.4	8.89	16.4	53627-1474	53627-1675	30
	9.32	8.22	5.715	13.22	53627-1474	53627-1675	20
ハウジングロック HSG LOCK	D	C	B	A	エンボス梱包 EMBOSSED PACKAGE	スティック梱包 STICK PACKAGE	極数 CIRCUITS


REVISED EC NO. J2010-2458 DRAWN: TKAHO CHKD: SASAO APPR: SASAO REV	DESCRIPTION 2010/06/04 2010/06/10 2010/06/11	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY Y. SAKIYAMA	DATE 2004/03/05	TITLE 0.635 PITCH B/B CONN. PLUG HSG COVER ASSY -LEAD FREE-		MOLEX INCORPORATED		SHEET NO. 1 OF 1	
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. SASAO	DATE 2004/03/05	DOCUMENT NO. SD-53627-001		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2004/03/05						

NOTES


1. 製品番号 53627-***72 の詳細寸法については SD-53627-001 を参照下さい。
IN THE PACKAGE, PART NO. 53627-***72 DETAILED DIMENSIONS, SEE SD-53627-001.

2. 梱包数量 : 700個/リール
NUMBER OF CONNECTORS : 700 PCS/REEL

3. リードテープ長さ
LEAD TAPE LENGTH

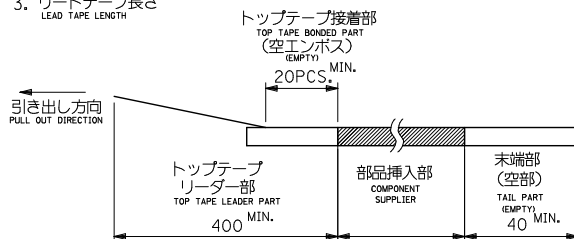


4. トップテープの剥離強度 (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
0.1~1.3N (10~130gf)
尚、本規格値は、出荷時に適用。
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
(但し、輸送時に剥離が発生しない事。)
(PEEL OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION)



5. 材料

MATERIAL
キャリアテープ : ポリプロピレン (PP)
CARRIER TAPE : POLYPROPYLENE (PP)
トップテープ : PET, PE, PEF
TOP TAPE : PET, PE, PEF
リール : 紙
REEL : CARDBOARD

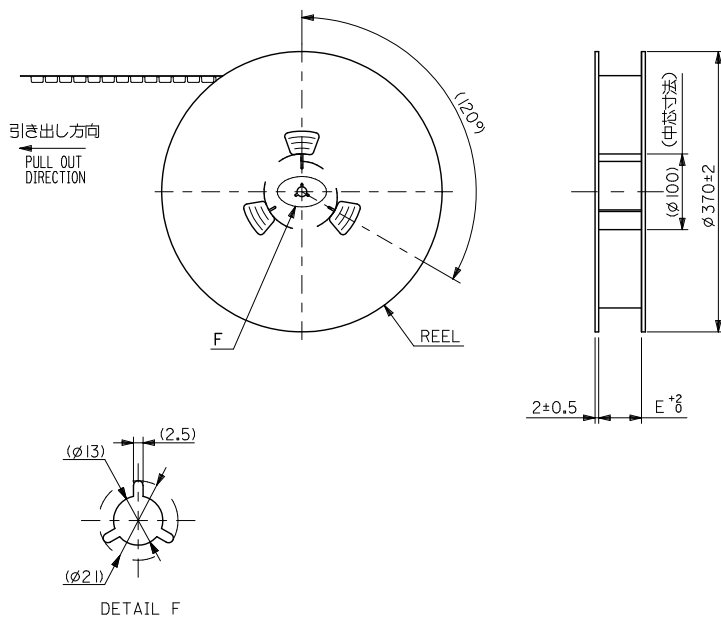

CONNECTOR SERIES No.		53627-***72
SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
---	METRIC	
TITLE		EMBSTP PKG FOR 0.635 B/B PLUG HSG ASSY (H=10) -LEAD FREE-
DOCUMENT NO.		SD-53627-002
SHEET NO.		1 OF 3

GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	
		MM ONLY	
10 UNDER	± 0.2	DRAWN BY	DATE
10 OVER 30 UNDER	± 0.25	Y. SAKIYAMA	2004/03/05
30 OVER	± 0.3	CHECKED BY	DATE
ANGULAR	± 3 °	M. SASAO	2004/03/05
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE
		M. SASAO	2004/03/05
		MATERIAL NO.	
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
		A3	

