

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[International Rectifier \(Infineon Technologies Americas Corp.\)  
IPS0151](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## FULLY PROTECTED POWER MOSFET SWITCH

### Features

- Over temperature shutdown
- Over current shutdown
- Active clamp
- Low current & logic level input
- E.S.D protection


### Description

The IPS0151/IPS0151S are fully protected three terminal SMART POWER MOSFETs that feature over-current, over-temperature, ESD protection and drain to source active clamp. These devices combine a HEXFET® POWER MOSFET and a gate driver. They offer full protection and high reliability required in harsh environments. The driver allows short switching times and provides efficient protection by turning OFF the power MOSFET when the temperature exceeds 165°C or when the drain current reaches 35A. The device restarts once the input is cycled. The avalanche capability is significantly enhanced by the active clamp and covers most inductive load demagnetizations.


### Product Summary

|                  |            |
|------------------|------------|
| $R_{ds(on)}$     | 25mΩ (max) |
| $V_{clamp}$      | 50V        |
| $I_{shutdown}$   | 35A        |
| $T_{on}/T_{off}$ | 1.5μs      |

### Packages

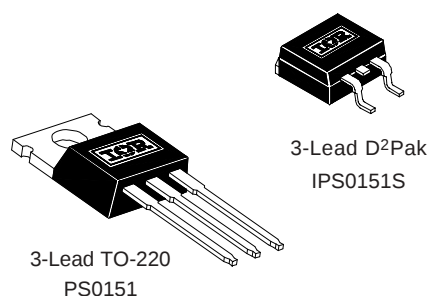

### Typical Connection

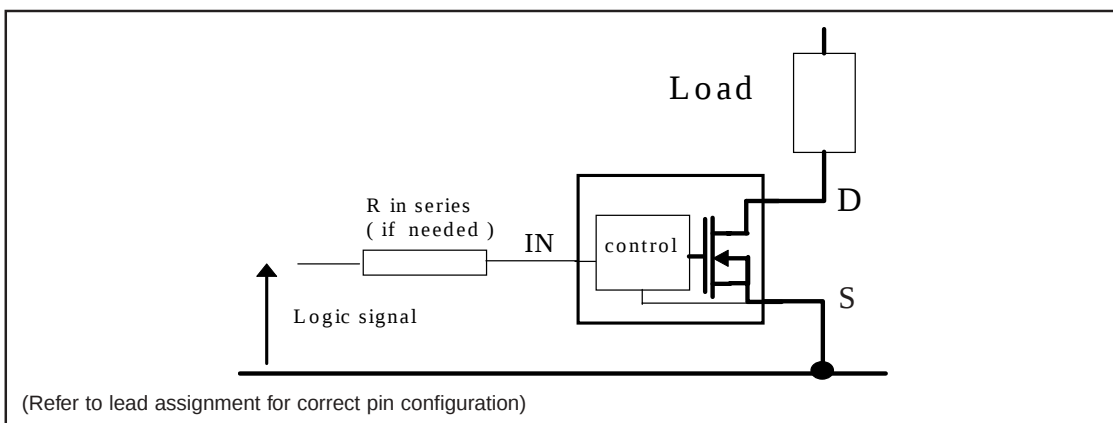

## IPS0151(S)

International  
**IR** Rectifier

### Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to SOURCE lead. (T<sub>Ambient</sub> = 25°C unless otherwise specified). PCB mounting uses the standard foot-print with 70 µm copper thickness.

| Symbol                 | Parameter                                       | Min. | Max. | Units | Test Conditions                   |
|------------------------|-------------------------------------------------|------|------|-------|-----------------------------------|
| V <sub>ds</sub>        | Maximum drain to source voltage                 | —    | 47   | V     |                                   |
| V <sub>in</sub>        | Maximum Input voltage                           | -0.3 | 7    |       |                                   |
| I <sub>in, max</sub>   | Maximum IN current                              | -10  | +10  | mA    |                                   |
| I <sub>sd cont.</sub>  | Diode max. continuous current <sup>(1)</sup>    |      |      | A     |                                   |
|                        | r <sub>th</sub> =62°C/W IPS0151                 | —    | 2.8  |       | TO220 free air                    |
|                        | r <sub>th</sub> =5°C/W IPS015135                | —    | 35   |       | TO220 with R <sub>th</sub> =5°C/W |
|                        | r <sub>th</sub> =80°C/W IPS0151S                | —    | 2.2  |       | SMD220 Std footprint              |
| I <sub>sd pulsed</sub> | Diode max. pulsed current <sup>(1)</sup>        | —    | 45   |       |                                   |
| P <sub>d</sub>         | Maximum power dissipation <sup>(1)</sup>        |      |      | W     |                                   |
|                        | (r <sub>th</sub> =62°C/W) IPS0151               | —    | 2    |       |                                   |
|                        | (r <sub>th</sub> =80°C/W) IPS0151S              | —    | 1.56 |       |                                   |
| ESD1                   | Electrostatic discharge voltage (Human Body)    | —    | 4    | kV    | C=100pF, R=1500Ω,                 |
| ESD2                   | Electrostatic discharge voltage (Machine Model) | —    | 0.5  |       | C=200pF, R=0Ω, L=10µH             |
| T <sub>stor.</sub>     | Max. storage temperature                        | -55  | 150  | °C    |                                   |
| T <sub>j max.</sub>    | Max. junction temperature                       | -40  | +150 |       |                                   |
| T <sub>lead</sub>      | Lead temperature (soldering, 10 seconds)        | —    | 300  |       |                                   |

### Thermal Characteristics

| Symbol            | Parameter                                   | Min. | Typ. | Max. | Units | Test Conditions             |
|-------------------|---------------------------------------------|------|------|------|-------|-----------------------------|
| R <sub>th 1</sub> | Thermal resistance free air                 | —    | 55   | —    | °C/W  | TO-220                      |
| R <sub>th 2</sub> | Thermal resistance junction to case         | —    | 2    | —    |       |                             |
| R <sub>th 1</sub> | Thermal resistance with standard footprint  | —    | 60   | —    |       | D <sup>2</sup> PAK (SMD220) |
| R <sub>th 2</sub> | Thermal resistance with 1" square footprint | —    | 35   | —    |       |                             |
| R <sub>th 3</sub> | Thermal resistance junction to case         | —    | 2    | —    |       |                             |

### Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

| Symbol                                    | Parameter                                                                                                     | Min. | Max. | Units |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------|------|------|-------|
| V <sub>ds (max)</sub>                     | Continuous drain to source voltage                                                                            | —    | 35   | V     |
| V <sub>IH</sub>                           | High level input voltage                                                                                      | 4    | 6    |       |
| V <sub>IL</sub>                           | Low level input voltage                                                                                       | 0    | 0.5  |       |
| I <sub>ds</sub><br>T <sub>amb</sub> =85°C | Continuous drain current                                                                                      |      |      | A     |
|                                           | (T <sub>Ambient</sub> = 85°C, I <sub>N</sub> = 5V, r <sub>th</sub> = 60°C/W, T <sub>J</sub> = 125°C) IPS0151  | —    | 4.3  |       |
|                                           | (T <sub>Ambient</sub> = 85°C, I <sub>N</sub> = 5V, r <sub>th</sub> = 80°C/W, T <sub>J</sub> = 125°C) IPS0151S | —    | 3.8  |       |
| R <sub>in</sub>                           | Recommended resistor in series with IN pin                                                                    | 0.2  | 5    | kΩ    |
| Tr-in (max)                               | Max recommended rise time for IN signal (see fig. 2)                                                          | —    | 1    | µS    |
| Fr-Isc <sup>(2)</sup>                     | Max. frequency in short circuit condition (V <sub>cc</sub> = 14V)                                             | 0    | 1    | kHz   |

(1) Limited by junction temperature (pulsed current limited also by internal wiring)

(2) Operations at higher switching frequencies is possible. See Application Notes.

International  
**IR** Rectifier

## IPS0151(S)

### Static Electrical Characteristics

(T<sub>j</sub> = 25°C unless otherwise specified.)

| Symbol                                     | Parameter                                                           | Min.    | Typ.     | Max.     | Units | Test Conditions                                       |
|--------------------------------------------|---------------------------------------------------------------------|---------|----------|----------|-------|-------------------------------------------------------|
| R <sub>ds(on)</sub>                        | ON state resistance T <sub>j</sub> = 25°C<br>T <sub>j</sub> = 150°C | 10<br>— | 20<br>35 | 25<br>45 | mΩ    | V <sub>in</sub> = 5V, I <sub>ds</sub> = 1A            |
| I <sub>dss1</sub><br>@T <sub>j</sub> =25°C | Drain to source leakage current                                     | 0       | 0.5      | 25       | μA    | V <sub>CC</sub> = 14V, T <sub>j</sub> = 25°C          |
| I <sub>dss2</sub><br>@T <sub>j</sub> =25°C | Drain to source leakage current                                     | 0       | 5        | 50       | μA    | V <sub>CC</sub> = 40V, T <sub>j</sub> = 25°C          |
| V <sub>clamp 1</sub>                       | Drain to source clamp voltage 1                                     | 47      | 52       | 56       | V     | I <sub>d</sub> = 20mA (see Fig.3 & 4)                 |
| V <sub>clamp 2</sub>                       | Drain to source clamp voltage 2                                     | 50      | 55       | 60       |       | I <sub>d</sub> =I <sub>shutdown</sub> (see Fig.3 & 4) |
| V <sub>in clamp</sub>                      | IN to source clamp voltage                                          | 7       | 8.1      | 9.5      |       | I <sub>in</sub> = 1 mA                                |
| V <sub>in th</sub>                         | IN threshold voltage                                                | 1       | 1.6      | 2        |       | I <sub>d</sub> = 50mA, V <sub>ds</sub> = 14V          |
| I <sub>in, -on</sub>                       | ON state IN positive current                                        | 25      | 90       | 200      | μA    | V <sub>in</sub> = 5V                                  |
| I <sub>in, -off</sub>                      | OFF state IN positive current                                       | 50      | 130      | 250      |       | V <sub>in</sub> = 5V<br>over-current triggered        |

### Switching Electrical Characteristics

V<sub>CC</sub> = 14V, Resistive Load = 3Ω, R<sub>input</sub> = 50Ω, 100μs pulse, T<sub>j</sub> = 25°C, (unless otherwise specified).

| Symbol           | Parameter                                | Min. | Typ. | Max. | Units | Test Conditions      |
|------------------|------------------------------------------|------|------|------|-------|----------------------|
| T <sub>on</sub>  | Turn-on delay time                       | 0.05 | 0.25 | 0.6  | μs    | See figure 2         |
| T <sub>r</sub>   | Rise time                                | 0.2  | 0.9  | 1.5  |       |                      |
| T <sub>rf</sub>  | Time to (final R <sub>ds(on)</sub> 1.3%) | —    | 3.8  | —    |       |                      |
| T <sub>off</sub> | Turn-off delay time                      | 0.8  | 1.5  | 2    |       | See figure 2         |
| T <sub>f</sub>   | Fall time                                | 0.4  | 1.1  | 2    |       |                      |
| Q <sub>in</sub>  | Total gate charge                        | —    | 30   | —    | nC    | V <sub>in</sub> = 5V |

### Protection Characteristics


| Symbol             | Parameter                                   | Min. | Typ. | Max. | Units | Test Conditions                             |
|--------------------|---------------------------------------------|------|------|------|-------|---------------------------------------------|
| T <sub>sd</sub>    | Over temperature threshold                  | —    | 165  | —    | °C    | See fig. 1                                  |
| I <sub>sd</sub>    | Over current threshold                      | 20   | 35   | 50   | A     | See fig. 1                                  |
| V <sub>reset</sub> | IN protection reset threshold               | 1.5  | 2.3  | 3    | V     |                                             |
| T <sub>reset</sub> | Time to reset protection                    | 2    | 10   | 40   | μs    | V <sub>in</sub> = 0V, T <sub>j</sub> = 25°C |
| EOI_OT             | Short circuit energy (see application note) | —    | 400  | —    | μJ    | V <sub>CC</sub> = 14V                       |

## IPS0151(S)

International  
**IR** Rectifier

### Functional Block Diagram

All values are typical

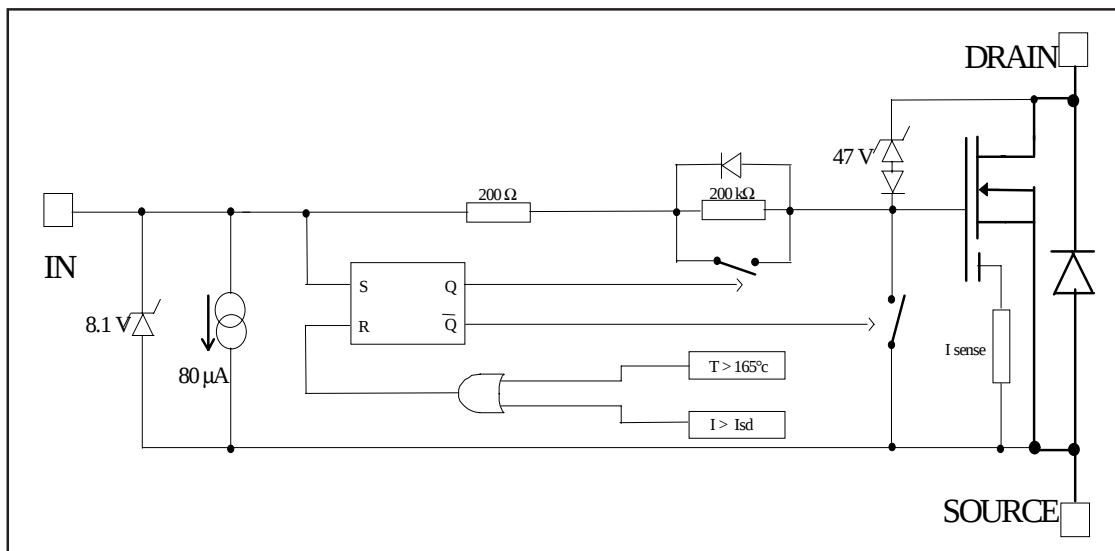

### Lead Assignments

|                                                    |                                                            |
|----------------------------------------------------|------------------------------------------------------------|
| <p>2 (D)</p> <p>1 2 3<br/>In D S</p> <p>TO-220</p> | <p>2 (D)</p> <p>1 2 3<br/>In D S</p> <p>D²PAK (SMD220)</p> |
| <p><b>IPS0151</b></p>                              | <p><b>IPS0151S</b></p>                                     |
| <p><b>Part Number</b></p>                          |                                                            |

International  
**IR** Rectifier

**IPS0151(S)**

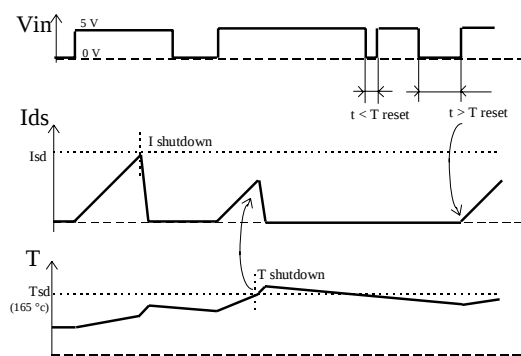


Figure 1 - Timing diagram

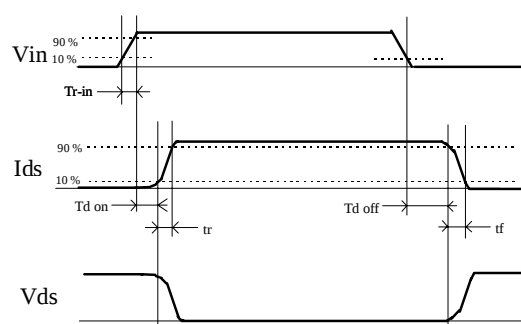


Figure 2 - IN rise time & switching time definitions

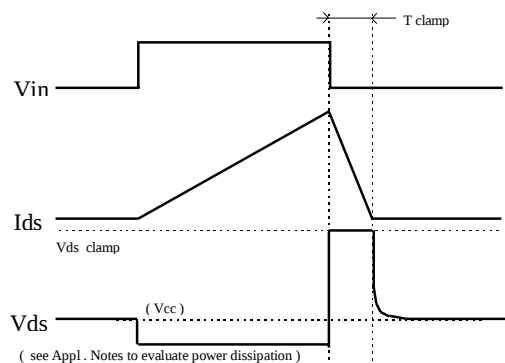


Figure 3 - Active clamp waveforms

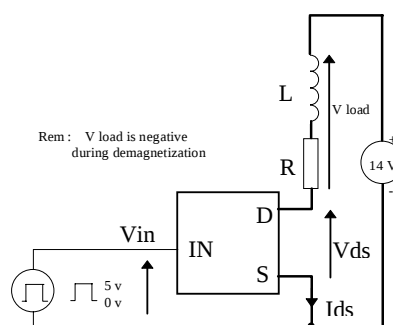


Figure 4 - Active clamp test circuit

## IPS0151(S)

International  
**IR** Rectifier

All curves are typical values with standard footprints. Operating in the shaded area is not recommended.

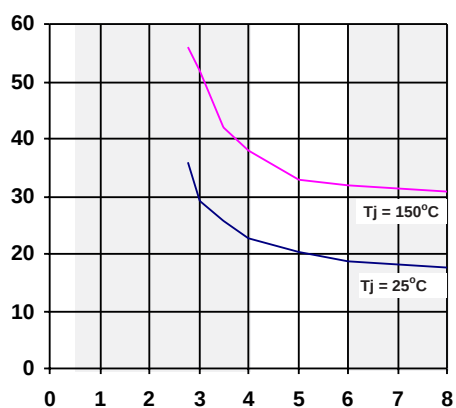


Figure 5 - Rds ON (mΩ) Vs Input Voltage (V)

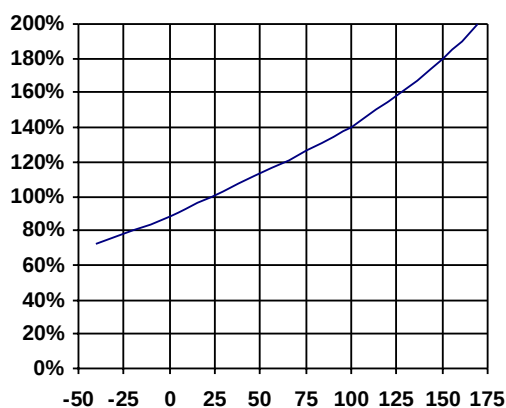


Figure 6 - Normalised Rds ON (%) Vs Tj (°C)

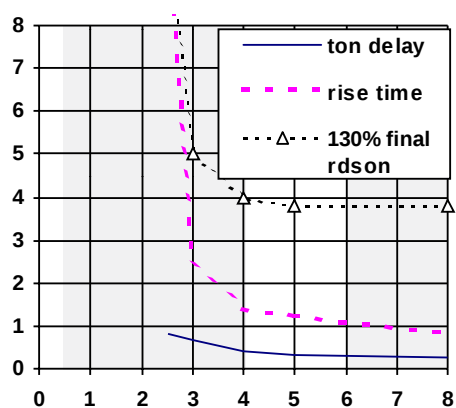


Figure 7 - Turn-ON Delay Time, Rise Time & Time to 130% final Rds(on) (us) Vs Input Voltage (V)

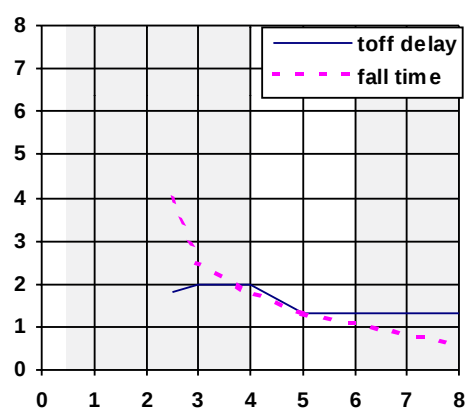


Figure 8 - Turn-OFF Delay Time & Fall Time (us) Vs Input Voltage (V)

International  
**IR** Rectifier

**IPS0151(S)**

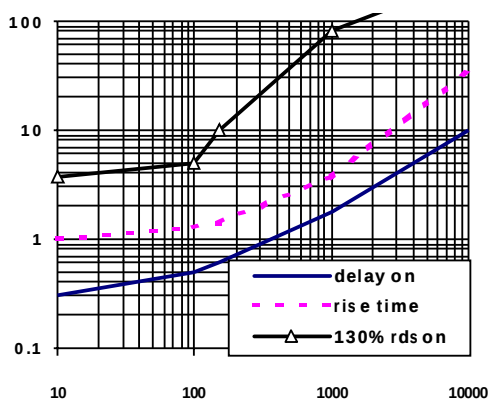


Figure 9 - Turn-ON Delay Time, Rise Time & Time to 130% final  $R_{ds(on)}$  (us) Vs IN Resistor ( $\Omega$ )

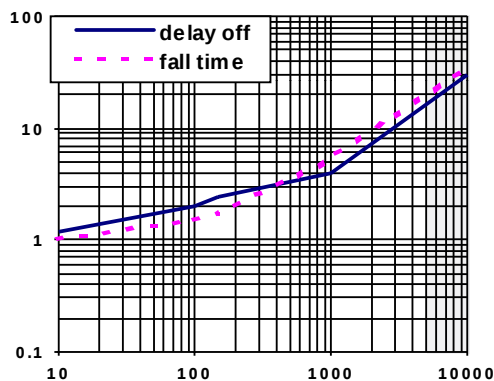


Figure 10 - Turn-OFF Delay Time & Fall Time (us) Vs IN Resistor ( $\Omega$ )

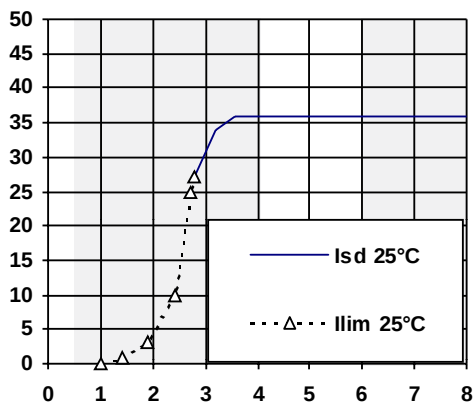


Figure 11 - Current lim. & Ishutdown (A) Vs  $V_{in}$  (V)

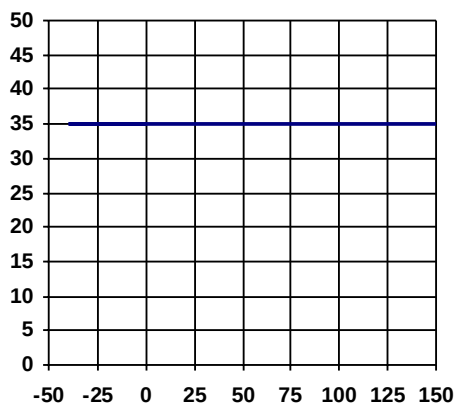


Figure 12 - Ishutdown (A) Vs Temperature ( $^{\circ}\text{C}$ )

## IPS0151(S)

International  
**IR** Rectifier

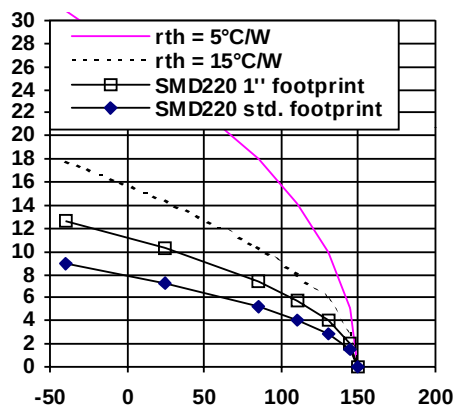


Figure 13 - Max.Cont. Ids (A) Vs Ambient Temperature (°C)

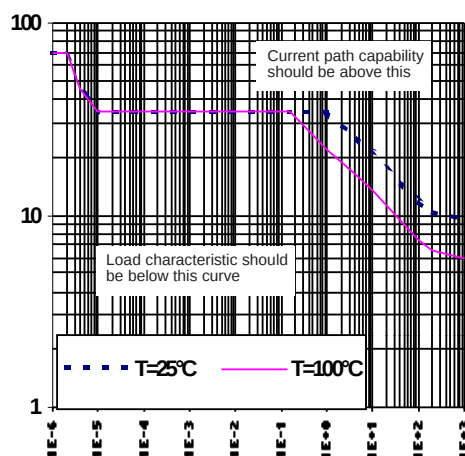


Figure 14 - Max.Cont. Ids (A) Vs Ambient Temperature (°C)

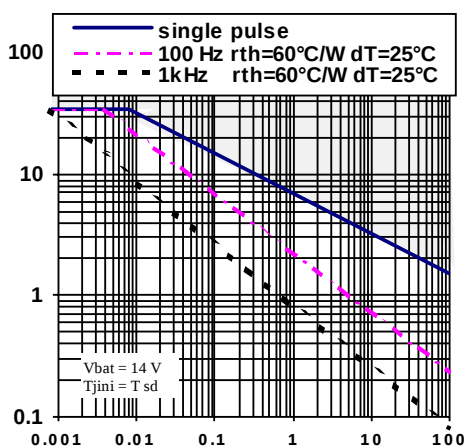


Figure 15 - Iclamp (A) Vs Inductive Load (mH)

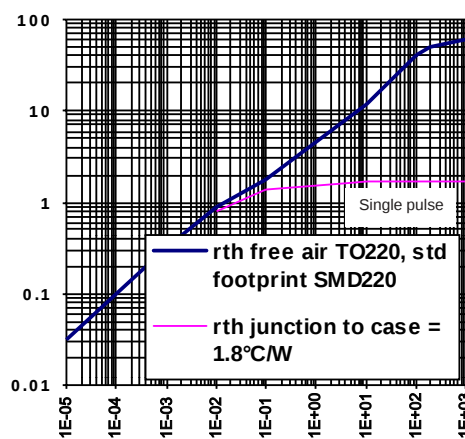


Figure 16 - Transient Thermal Imped. (°C/W) Vs Time (s) - IPS0151/IPS051S

International  
**IR** Rectifier

## IPS0151(S)

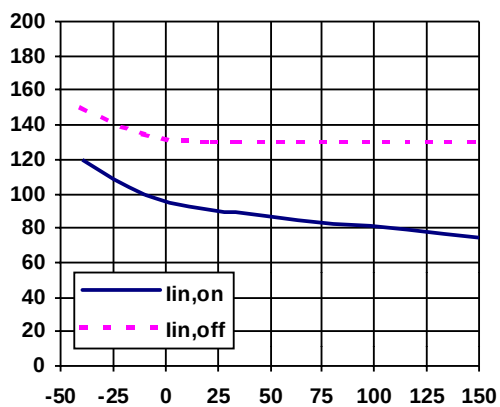


Figure 17 - Input current (μA) Vs Junction (°C)

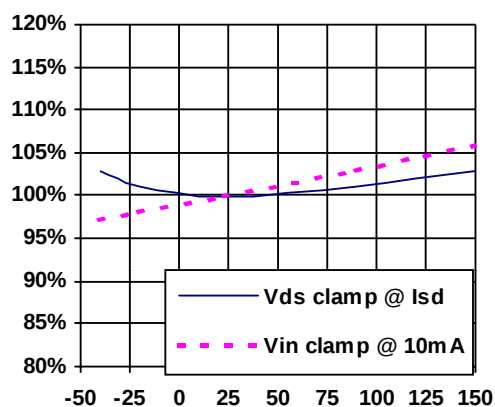


Figure 18 - Vin clamp and V clamp2 (V)  
Vs Tjunction (°C)


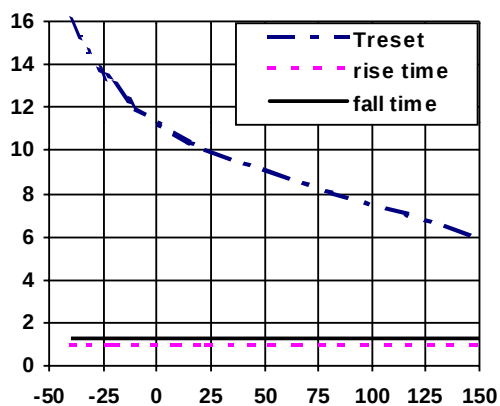


Figure 19 - Turn-on, Turn-off, and Treset (μs)  
Vs Tjunction (°C)

**IPS0151(S)**

International  
**IOR** Rectifier


## Case Outline

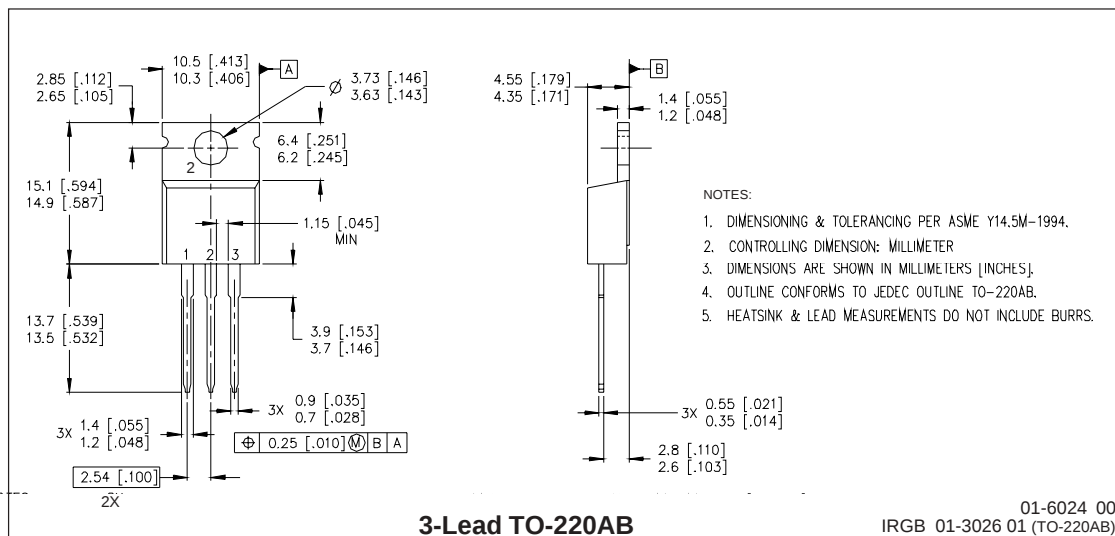

International  
**IR** Rectifier

**IPS0151(S)**


## Case Outline

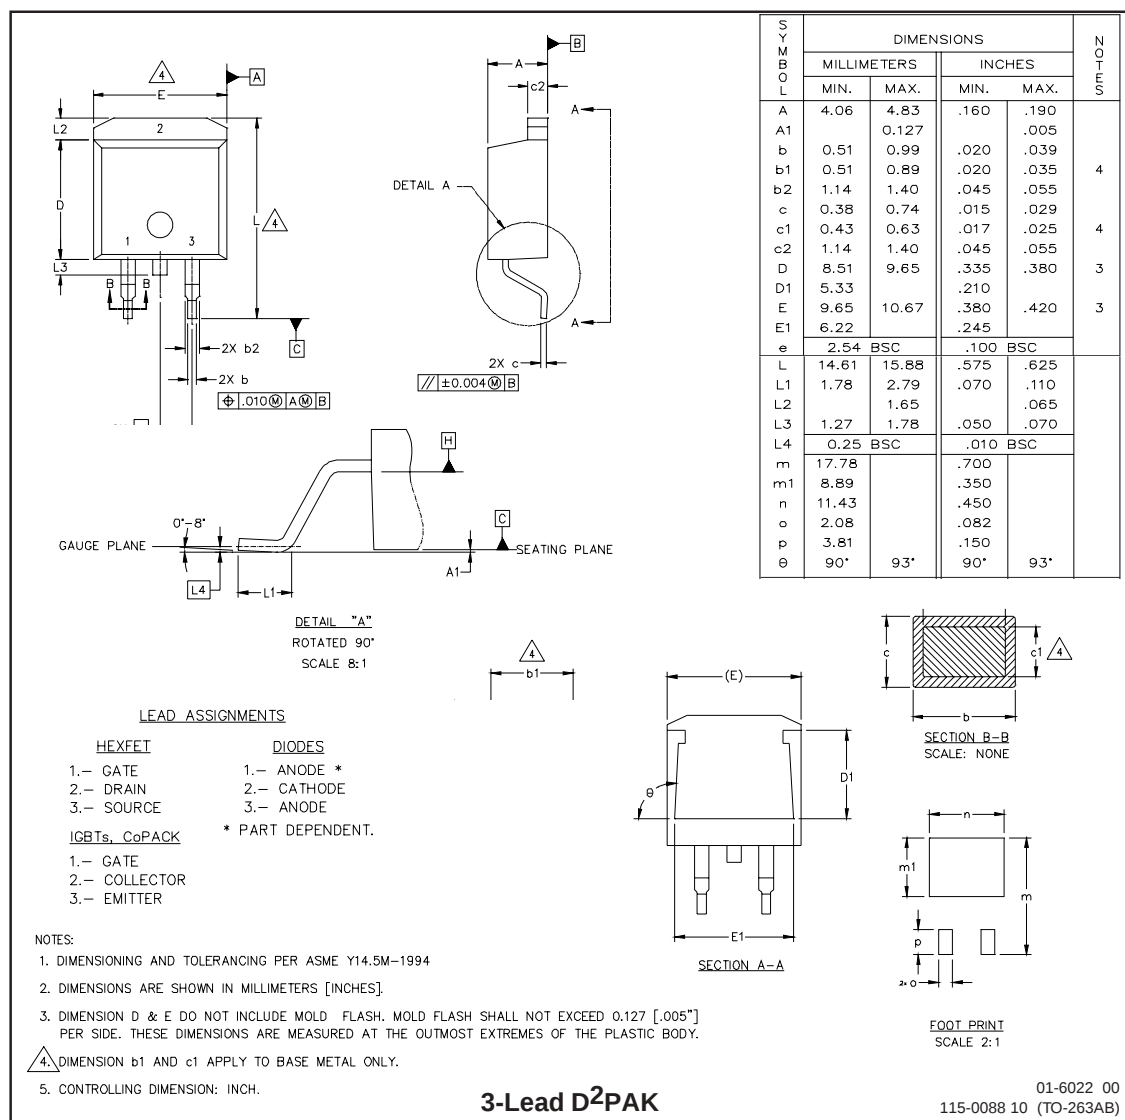

# IPS0151(S)

International  
**IOR** Rectifier

**Tape & Reel - D<sup>2</sup>PAK (SMD220)**

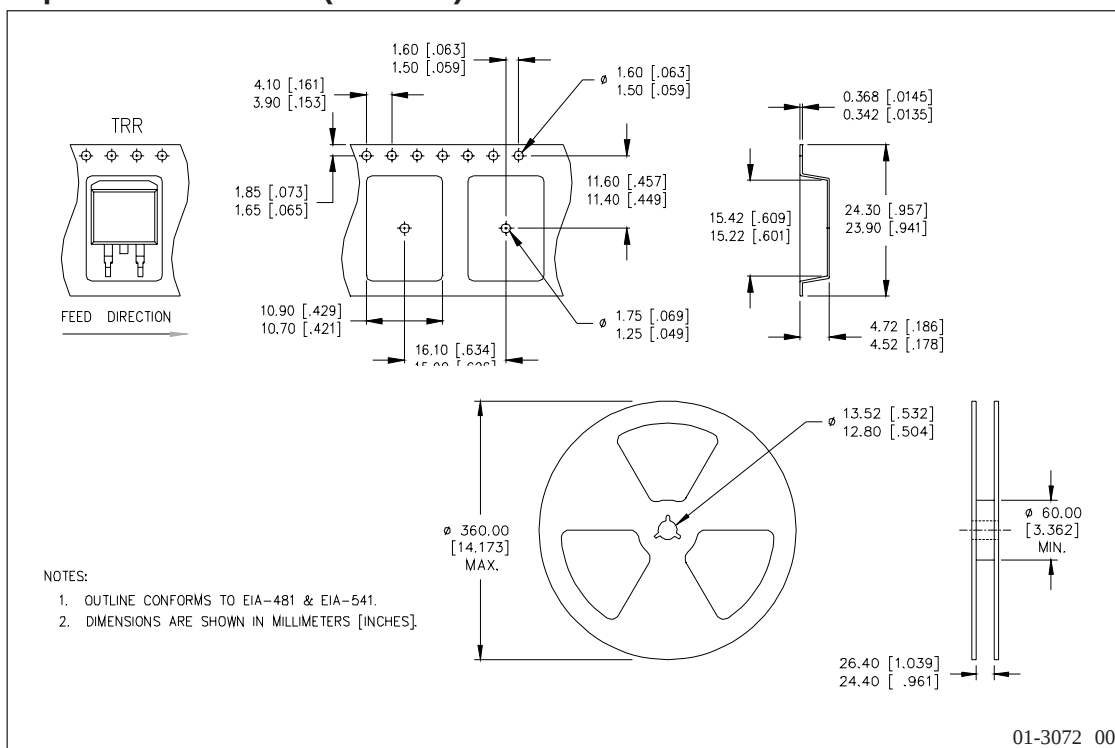

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105  
Data and specifications subject to change without notice. 11/13/2001

Note: For the most current drawings please refer to the IR website at:

<http://www.irf.com/package/>