

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tamura](#)
[PFT24-35](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV. Status

REVISION -
05/04/99 TS

REVISION A
REV'D MARKING
07/21/05 MP

REVISION B
ADDED RoHS
02/24/06 MP

LOW PROFILE, THREE FLANGE 24VA POWER TRANSFORMER APPROVED TO UL506

A. Electrical Specifications (@ 25 °C)


1. Input Voltage and Frequency; 115/230V 50/60 Hz
2. Output Voltage; 35VCT $\pm 5\%$ @ 0.3A
16VCT $\pm 5\%$ @ 0.72A
3. Output Power; 24VA
4. Insulation Resistance;
100 M Ω MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core
5. Hi-Pot;
1500 Vrms 1 minute @ Pri to Sec, Pri to Core
1500 Vrms 1 minute @ Sec to Core

B. Marking; TAMURA, MICROTRAN, PFT24-35, date code,
country of origin, terminal numbers,
safety symbols.

C. Safety:


UL506 General Purpose, File No. E79781

D. Schematic Diagram:




MODEL NUMBER

PFT24-35

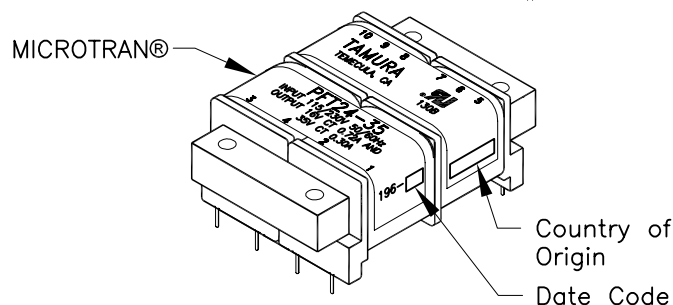

E. Mechanical Specifications:

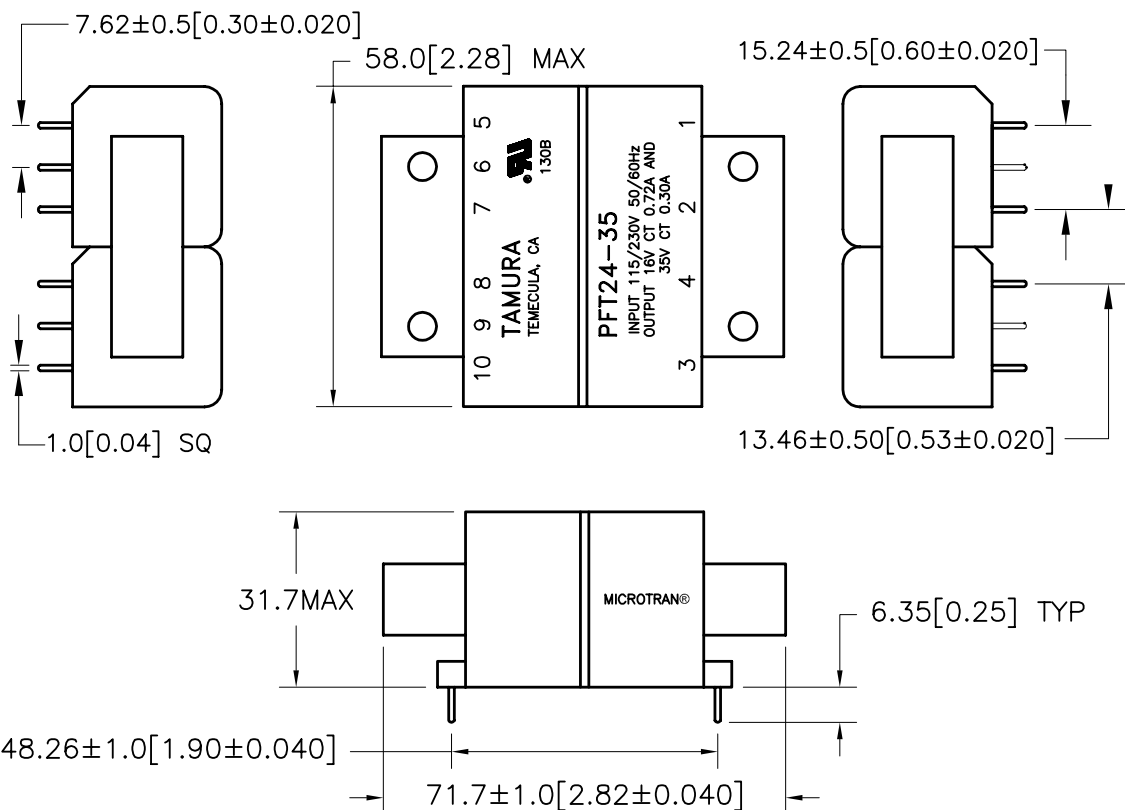

PREPARED BY:

K. BRENNAN

ENGINEER:

M. PITCHAI

QUALITY CONTROL:

T. CLEM

APPROVED:

Y. SEKIGUCHI

DRAWING CONTROL NO.

P-A1-12164
ACAD\MXFRM\A1121641.DWG

REV

B

MODEL DESCRIPTION

3 FLANGE BOBBIN
POWER TRANSFORMER

MODEL SPECIFICATION

PFT24-35

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

DIM: mm [In] SCL: 1/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA
RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN
CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.