

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[22-28-8304](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

NO. CKTS	DIM. A	DIM. B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42
25	63.50	60.96
26	66.04	63.50
27	68.58	66.04
28	71.12	68.58
29	73.66	71.12
30	76.20	73.66
31	78.74	76.20
32	81.28	78.74
33	83.82	81.28
34	86.36	83.82
35	88.90	86.36
36	91.44	88.90
37	93.98	91.44
38	96.52	93.98
39	99.06	96.52
40	101.60	99.06



- NOTES:
- MATERIAL: GLASS FILLED NYLON
UL94V-0, COLOR: BLACK
 - FINISH:
(154) OVERALL TIN: 0.00254/0.00100 MIN. OVER
NICKEL: 0.00127/0.00050 MIN.
(208) SELECT GOLD: 0.00038/0.00015 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
(228) SELECT GOLD: 0.00076/0.00030 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
 - PRODUCT SPECIFICATION: PS 10-07
 - PACKAGING INFORMATION: SEE TABLES
 - SOLDERABILITY PER SMES-152.
 - PIN PUSH OUT FORCE: 3 LBS, MIN
 - KINK PIN OPTION NOT RECOMMENDED FOR 2 CIRCUIT PARTS.
HOLE SIZE MAY NEED TO BE ADJUSTED FOR 2 CIRCUIT PARTS
WITH KINK OPTION FOR PROPER INSERTION INTO THE PCB.
SEE SMES-42003 FOR ADDITIONAL INFORMATION
ON KINK PIN DIRECTION AND PLACEMENT.
 - HEADERS ARE NOT STACKABLE ON 254/100 CENTERS.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.
 - PIN TIP DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
DIMENSIONS APPLY PRIOR TO PLATING OR ASSEMBLY.

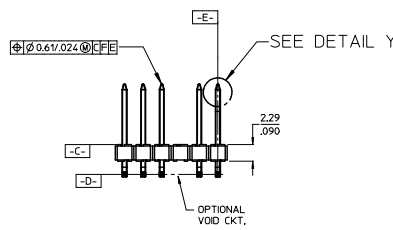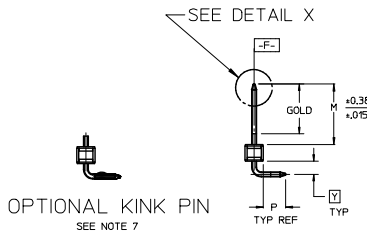

CORRECT DIMENSION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
E.C. NO: UCP2015-1410		DRAWN BY: 2014/10/20		mm		MM/IN		2:1		INCH		X4	
DRW:KMP/PER		2014/10/20		INCH		DATE		DATE		DATE		DATE	
CHK:KINGUYEN		2014/10/20		DATE		DATE		DATE		DATE		DATE	
APPR:SMITH		2014/10/31		DATE		DATE		DATE		DATE		DATE	
REV		DESCRIPTION		4 PLACES ±		DRAWN BY: JSCHAFER		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.	
X4		QUALITY SYMBOLS		3 PLACES ±		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		2 PLACES ±		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		1 PLACE ±		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		0 PLACE ±		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		ANGULAR ±1/2°		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		DRAFT WHERE APPLICABLE		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		MUST REMAIN WITHIN DIMENSIONS		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	
		QUALITY SYMBOLS		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CHECKED BY: DATE		APPROVED BY: DATE		MATERIAL NO.		DOCUMENT NO.	