

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[15-29-7056](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

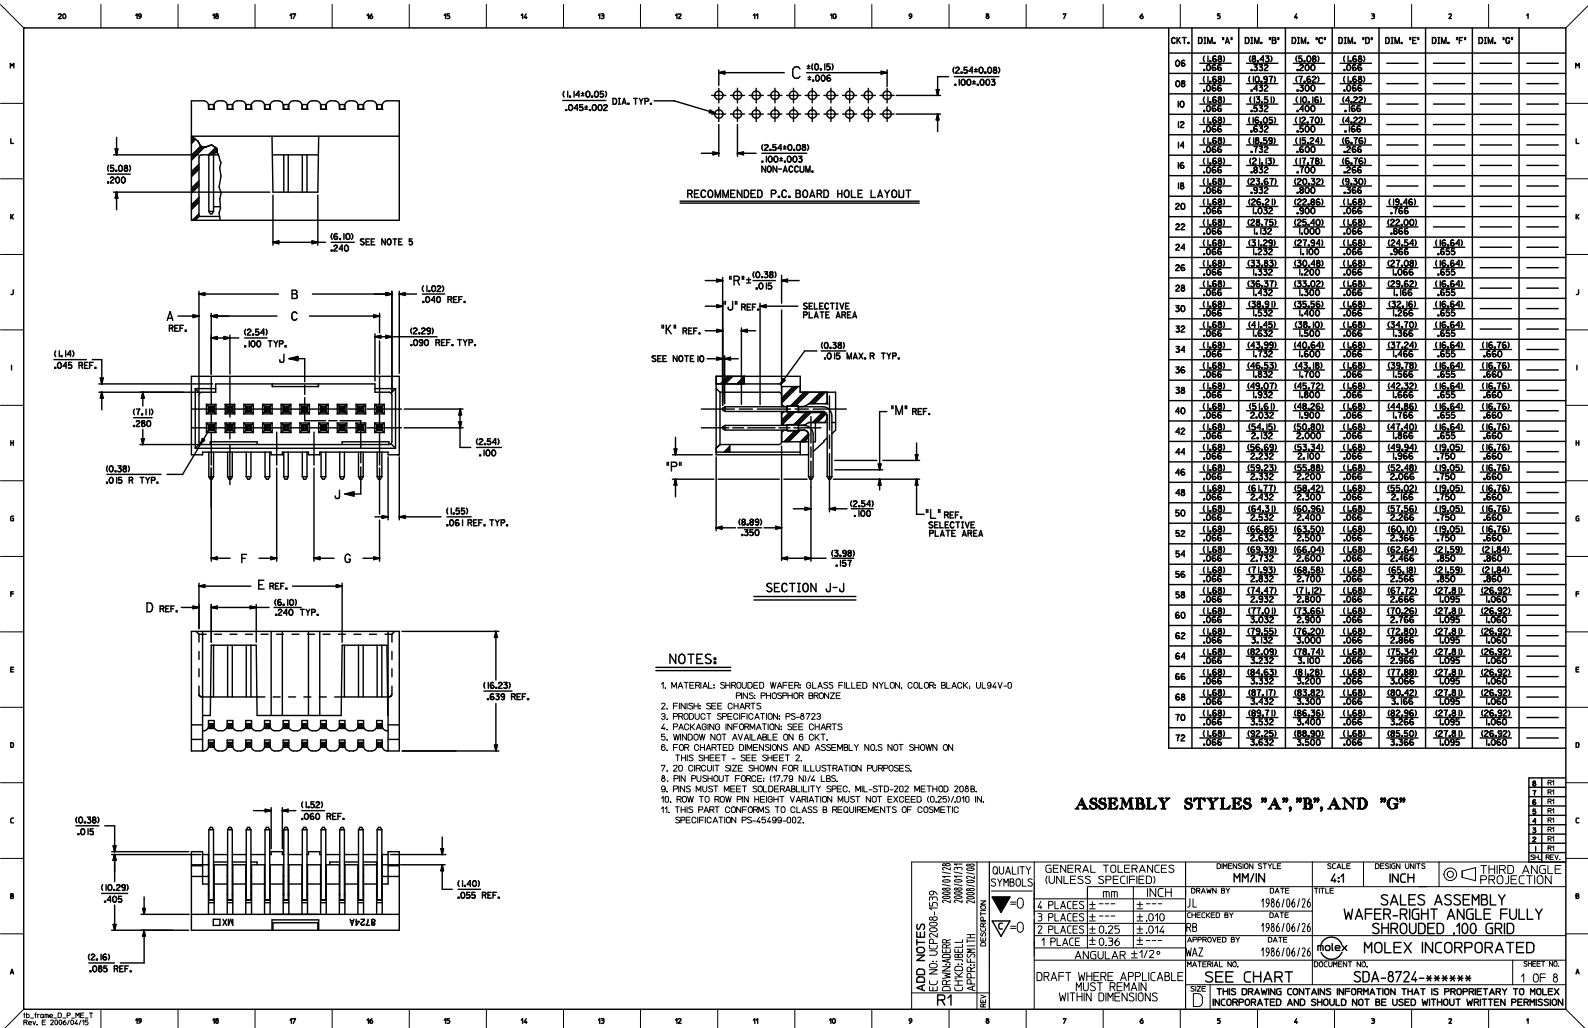

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1		
H	ENGINEERING PART NUMBER A-8724-	RELEASE FOR MANUFACTURE	P REF.	PLATING (SEE NOTES ON THIS SHEET)	CONNECTOR END PLATING			P.C. BOARD END PLATING			PACKAGING INFORMATION		PLATING FINISHES: TIN TIN (5N) OVER ENTIRE PIN. THICKNESS=(0.375 MICROMETER)/75 MICROINCH MINIMUM. NICKEL (NI) UNDERPLATE OVER ENTIRE PIN. 15 GOLD SELECTIVE GOLD (Au) IN THE CONTACT AREA: THICKNESS=(0.37 MICROMETER)/15 MICROINCH MINIMUM. SELECTIVE TIN (5N) IN THE PC TAIL AREA: THICKNESS=(1.68 MICROMETER)/75 MICROINCH MINIMUM. NICKEL (NI) UNDERPLATE OVER ENTIRE PIN. 30 GOLD SELECTIVE GOLD (Au) IN THE CONTACT AREA: THICKNESS=(0.75 MICROMETER)/30 MICROINCH MINIMUM. SELECTIVE TIN (5N) IN THE PC TAIL AREA: THICKNESS=(1.68 MICROMETER)/75 MICROINCH MINIMUM. NICKEL (NI) UNDERPLATE OVER ENTIRE PIN. *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.									
					TYPE	J LENGTH	K MEAS.	R (0.38) ±.015	TYPE	L LENGTH	M MEAS.	PK-70873-										
L	06A164 / 72A164	RFM	(3.30) .130	TIN	TIN	—	(2.54) .100	(6.00) .315	TIN	—	(1.27) .050	0019										
	06B164 / 72B164	RFM	(5.08) .200	TIN	TIN	—	(2.54) .100	(6.00) .315	TIN	—	(1.27) .050	0019										
K	06A571 / 72A571	RFM	(3.30) .130	15 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050	0019										
	06B571 / 72B571	RFM	(5.08) .200	15 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050	0019										
J	06A574 / 72A574	RFM	(3.30) .130	30 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050	0019										
	06B574 / 72B574	RFM	(5.08) .200	30 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050	0019										
I	06G164 / 72G164	RFM	(3.30) .130	TIN	TIN	—	(2.54) .100	(6.35) .250	TIN	—	(1.27) .050	0019										
G																						
F																						
E																						
D																						
C																						
B																						
A																						