

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[15-42-7018](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

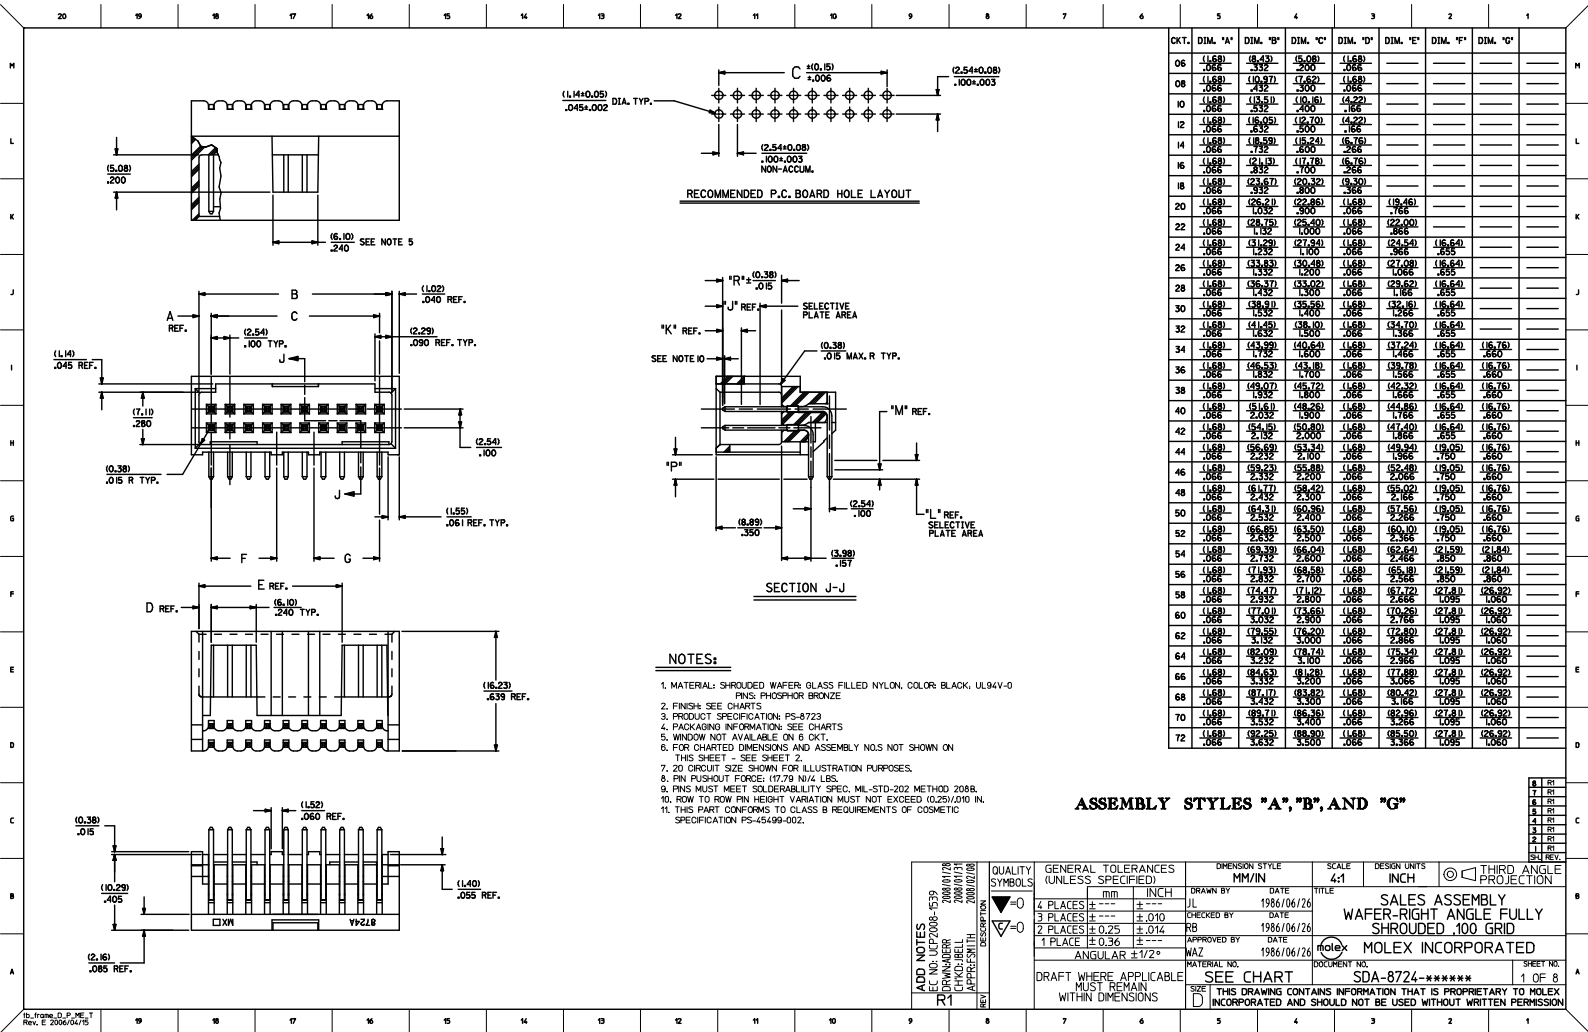

20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1					
ENGINEERING PART NUMBER A-8724-		RELEASE FOR MANUFACTURE	P REF.	PLATING (SEE NOTES ON THIS SHEET)	CONNECTOR END PLATING				P.C. BOARD END PLATING				PACKAGING INFORMATION		PLATING FINISHES									
					TYPE	J LENGTH	K MEAS.	R (0.38) .015	TYPE	L LENGTH	M MEAS.	TIN TIN (5N) OVER ENTIRE PIN THICKNESS=(0.37 MICROMETER)/15 MICROINCH MINIMUM NICKEL (NI) UNDERPLATE OVER ENTIRE PIN.												
06A164 / 72A164		RFM	(3.30) .130	TIN	TIN		(2.54) .100	(6.00) .315	TIN		(1.27) .050	IS GOLD SELECTIVE GOLD (Au) IN THE CONTACT AREA THICKNESS=(0.37 MICROMETER)/15 MICROINCH MINIMUM SELECTIVE TIN (5N) IN THE PC TAIL AREA THICKNESS=(1.88 MICROMETER)/75 MICROINCH MINIMUM NICKEL (NI) UNDERPLATE OVER ENTIRE PIN.												
06B164 / 72B164		RFM	(5.08) .200	TIN	TIN		(2.54) .100	(6.00) .315	TIN		(1.27) .050	30 GOLD SELECTIVE GOLD (Au) IN THE CONTACT AREA THICKNESS=(0.75 MICROMETER)/30 MICROINCH MINIMUM SELECTIVE TIN (5N) IN THE PC TAIL AREA THICKNESS=(1.88 MICROMETER)/75 MICROINCH MINIMUM NICKEL (NI) UNDERPLATE OVER ENTIRE PIN.												
06A571 / 72A571		RFM	(3.30) .130	IS GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050	*THE PRIMARY SHIPPING CARTON WILL BE LABELED 'COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC'. CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.												
06B571 / 72B571		RFM	(5.08) .200	IS GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050													
06A574 / 72A574		RFM	(3.30) .130	30 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050													
06B574 / 72B574		RFM	(5.08) .200	30 GOLD	GOLD	(5.08) .200	(2.54) .100	(6.00) .315	TIN	(2.54) .100	(1.27) .050													
06G164 / 72G164		RFM	(3.30) .130	TIN	TIN		(2.54) .100	(6.35) .250	TIN		(1.27) .050													
					</																			