

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0022289110](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

		10	
	NO. CKTS	DIM. A	DIM. B
F	2	508	254
	3	200	200
	4	1076	762
	5	762	508
	6	200	200
	6	1524	1070
	6	1076	762
	7	762	508
	7	200	200
	9	2286	2032
E	10	2540	2286
	11	1000	1000
	12	2540	2286
	13	1000	1000
	13	3302	3048
	14	1000	1000
	14	3556	3302
	15	3048	2794
	15	3810	3556
	16	1520	1400
D	16	4024	3810
	18	4572	4318
	18	2000	1800
	19	4826	4572
	20	1500	1800
	20	5080	4826
	21	2000	2000
	21	5588	5334
	22	2000	2000
	22	5842	5588
C	23	2000	2000
	24	6096	5842
	24	2400	2300
	25	6350	6096
	26	2500	2400
	26	6604	6350
	27	2000	2000
	27	6858	6604
	28	2000	2000
	28	7112	6858
	29	2800	2700
	29	7366	7112
	30	2000	2800
	30	7620	7366
	31	3000	2900
	31	7874	7620
	32	3000	3000
	32	8128	7874
	33	3000	8128
	33	8382	8128
	34	3300	3200
	34	8636	8382
	35	8890	8636
	36	9144	8890



- NOTES:
1. MATERIAL: GLASS FILLED NYLON
UL94-V-0, COLOR: BLACK
2. FINISH
(154) OVERALL TIN: 0.00254/.000100 MIN. OVER
NICKEL: 0.00127/.000050 MIN.
(208) SELECT GOLD: 0.00038/.00005 MIN.
SELECT TIN: 0.00254/.000100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
- (228) SELECT GOLD: 0.00076/.00030 MIN.
SELECT TIN: 0.00254/.000100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
3. PRODUCT SPECIFICATION: SEE TABLES
4. PACKAGING INFORMATION: SEE TABLES
5. SOLIDABILITY PER SMES-152.
6. PIN PUSH OUT FORCE: 3 LBS. MIN.
7. KINK PIN DETECTION NOT REQUIRED FOR 2 CIRCUIT PARTS.
HOLE SIZE MAY NEED TO BE ADJUSTED FOR 2 CIRCUIT PARTS
WITH KINK OPTION FOR PROPER INSERTION INTO THE PCB.
SEE SMES-42003 FOR ADDITIONAL INFORMATION
ON KINK PIN DETECTION AND PLACEMENT.
8. HEADERS ARE NOT STACKABLE ON 254/.100 CENTERS.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.
10. PIN DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
DIMENSIONS APPLY PRIOR TO PLATING OF ASSEMBLY.

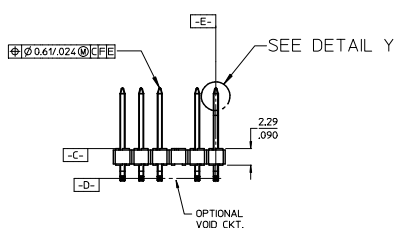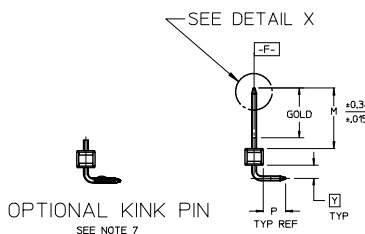

CORRECT DIMENSION		DESCRIPTION		SHEET 1 REV	
EC NO. UCP205-1410	2014/10/20	DRWNK:IPPER	2014/10/20		
CHKD:KNGUYEN	2014/10/20	APPR:FSM TH	2014/10/31		
REV		QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE
			mm	INCH	MM/IN
		$\nabla=0$	4 PLACES $\pm .---$	$\pm .---$	DRAWN BY JSCHAFER DATE 11/24/03
		$\nabla=0$	3 PLACES $\pm .---$	$\pm .010$	CHECKED BY DATE
		$\nabla=0$	2 PLACES $\pm .025$	$\pm .015$	SAMIEC 11/24/03
			1 PLACE $\pm .038$	$\pm .---$	APPROVED BY DATE
			0 PLACE $\pm$	$\pm$	MARGULIS 11/24/03
			ANGULAR $\pm 1/2^\circ$		MATERIAL NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART
					SIZE B THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
			SCALE 2:1	DESIGN UNITS INCH	TITLE
					KK 100 HEADER ASSEMBLY FLAT RIGHT ANGLE BREAKAWAY molex DOCUMENT NO. SD-42377-001
			THIRD ANGLE PROJECTION		SHEET NO. 1 OF *