

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0026192051](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

	10	9	8	7	6	5	4	3	2	1
F	ENG No:		AE-3190-NA							
	DIM "D"		(11.43) .450							
	DIM "C"		(19.05) .750							
E	CCT SIZE	DIM "A"	DIM "B"	PART No						
	3	(7.92) .312	(11.89) .468	26-19-2031						
	4	(11.89) .468	(15.85) .624	26-19-2041						
D	5	(15.85) .624	(19.81) .780	26-19-2051						
	6	(19.81) .780	(23.77) .936	26-19-2061						
	7	(23.77) .936	(27.74) 1.092	26-19-2071						
C	8	(27.74) 1.092	(31.70) 1.248	26-19-2081						
	9	(31.70) 1.248	(35.66) 1.404	26-19-2091						
	10	(35.66) 1.404	(39.62) 1.560	26-19-2101						
B	11	(39.62) 1.560	(43.59) 1.716	26-19-2111						
	12	(43.59) 1.716	(47.55) 1.872	26-19-2121						
	13	(47.55) 1.872	(51.51) 2.028	26-19-2131						
A	14	(51.51) 2.028	(55.47) 2.184	26-19-2141						
	15	(55.47) 2.184	(59.44) 2.340	26-19-2151						
	16	(59.44) 2.340	(63.40) 2.496	26-19-2161						
	17	(63.40) 2.496	(67.36) 2.652	26-19-2171						
	18	(67.36) 2.652	(71.32) 2.808	26-19-2181						
	19	(71.32) 2.808	(75.29) 2.964	26-19-2191						
	20	(75.29) 2.964	(79.25) 3.120	26-19-2201						

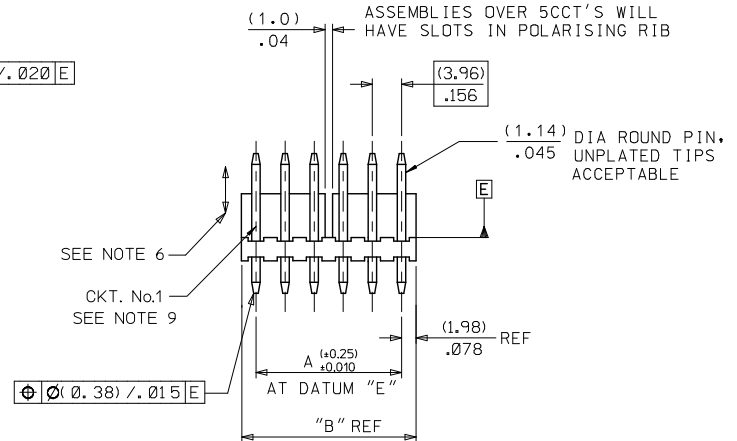

RECOMMENDED PCB HOLE DIMENSIONS

- NOTES:
1. MATERIAL: HOUSING: NYLON, UL94V-2, COLOR: NATURAL
PINS: BRASS
 2. FINISH: (0.00254)/.000100 MIN, MATTE TIN OVER
(0.00127)/.000050 MIN, NICKEL
UNPLATED TIPS ACCEPTABLE
 3. PRODUCT SPECIFICATION: PS-99020-0087
 4. PACKAGING SPECIFICATION: PER PK-3190-001
 5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.
 6. PIN PUSHOUT FORCE 3 LBS MIN.
 7. PIN MUST CONFORM TO MOLEX SOLDERABILITY SPEC
SMES-152 AFTER PLATING.
 8. RECOMMENDED PCB BOARD 1.6MM
 9. CIRCUIT 1 USED TO DEFINE VOID LOCATION. CIRCUIT 1
MAY OR MAY NOT ALIGN WITH CIRCUIT 1 OF THE MATING PART.

REMOVE 2CKT EC NO: UCP2016-0549 DRAWINGS CHKD:JDFX APPR:SMITH AD1	2015/08/06 2015/08/06 2015/08/24	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
					mm	INCH	MM/IN	DATE	TITLE	METRIC	
				▽=0	4 PLACES ±---	±---	T. MOHON	1998/10/02	WAFER POL KK .156 FOR .045 ROUND PINS	2:1	MOLLEX
				▽=0	3 PLACES ±---	±.010	CHECKED BY	DATE			
				▽=0	2 PLACES ±0.25	±.014	M. GOONEY	1998/10/02			
					1 PLACE ±0.35	±---	APPROVED BY	DATE			
					0 PLACE ±	±	MWILHITE	1998/10/02			
					ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
					DRAFT WHERE APPLICABLE		SEE CHART		SDAE-3190-N**		1 OF 2
					MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				