

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0026503040](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

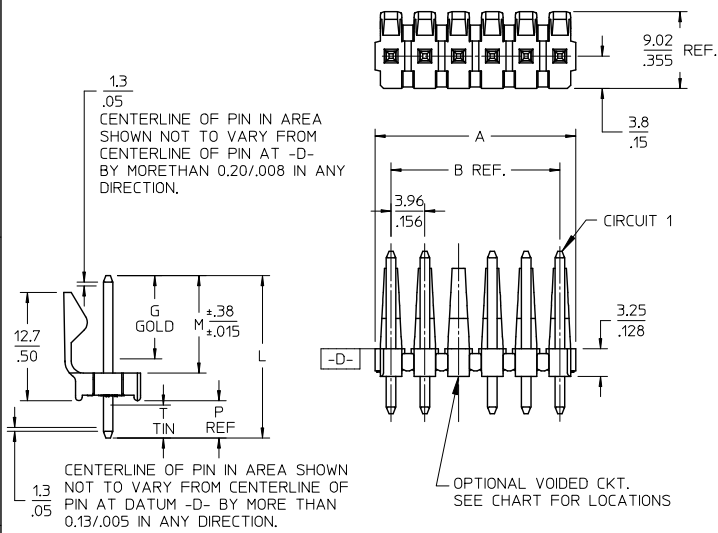

A-41671- * N * * *

OPTION -PIN- PACKING
C-BRASS -43294- BULK PACK

NO OF CKTS
DIM M.L.P
PLATING

VOID LOCATIONS
BLANK=NO VOIDS
NO=CKT NO VOIDED
MULT-VOIDS=51 UP

PCB LAYOUT:COMPONENT SIDE
RECOMMENDED PCB THICKNESS:
1.57±.18/.062±.007

ADD	EC NO.	UPPER	LOWER	DATE	DESCRIPTION	REV
41671-3474	UCP2016-1581	DRWN:KIPPER	CHKD:JBELL	2015/10/12	2015/12/10	
AK7		APPR:FSMTH				

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	4 PLACES ± --- ± ---
▽=0	3 PLACES ± --- ± .010
▽=0	2 PLACES ± 0.25 ± .015
▽=0	1 PLACE ± 0.38 ± ---
▽=0	0 PLACE ± ±
	ANGULAR ±1/2°
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM/IN	1.5:1	INCH	
DRAWN BY	DATE	TITLE	
JSCHAFER	2004/04/05	KK 156 HEADER ASSEMBLY	
CHECKED BY	DATE	FRICTION LOCK STRAIGHT	
KSAMIEC	2004/04/05	BREAKAWAY	
APPROVED BY	DATE		
MARGULIS	2004/04/05		
MATERIAL NO.	DOCUMENT NO.		
SEE CHART	SD-41671-001		
SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

CKT	B	A
2	3.96 .156	6.78/7.87 .267/1.310
3	7.92 .312	10.74/11.84 .423/1.466
4	11.89 .468	14.71/15.80 .579/1.622
5	15.85 .624	18.67/19.76 .735/1.778
6	19.81 .780	22.63/23.72 .891/1.934
7	23.77 .936	26.59/27.69 1.047/1.090
8	27.74 1.092	30.56/31.65 1.203/1.246
9	31.70 1.248	34.52/35.61 1.359/1.402
10	35.66 1.404	38.48/39.57 1.515/1.558
11	39.62 1.560	42.44/43.54 1.671/1.714
12	43.59 1.716	46.41/47.50 1.827/1.870
13	47.55 1.872	50.37/51.46 1.983/2.026
14	51.51 2.028	54.33/55.42 2.139/2.182
15	55.47 2.184	58.29/59.39 2.295/2.338
16	59.44 2.340	62.26/63.35 2.451/2.494
17	63.40 2.496	66.22/67.31 2.607/2.650
18	67.36 2.652	70.18/71.27 2.763/2.806
19	71.32 2.808	74.14/75.23 2.919/2.962
20	75.29 2.964	78.11/79.20 3.075/3.118
21	79.25 3.120	82.07/83.16 3.231/3.274
22	83.21 3.276	86.03/87.12 3.387/3.430
23	87.17 3.432	89.94/91.08 3.541/3.586
24	91.14 3.588	93.85/95.00 3.695/3.740

tb_frame_A_P_AM-T
Rev. G 2012/01/11

5

4

3

2

1