

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0026603076](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

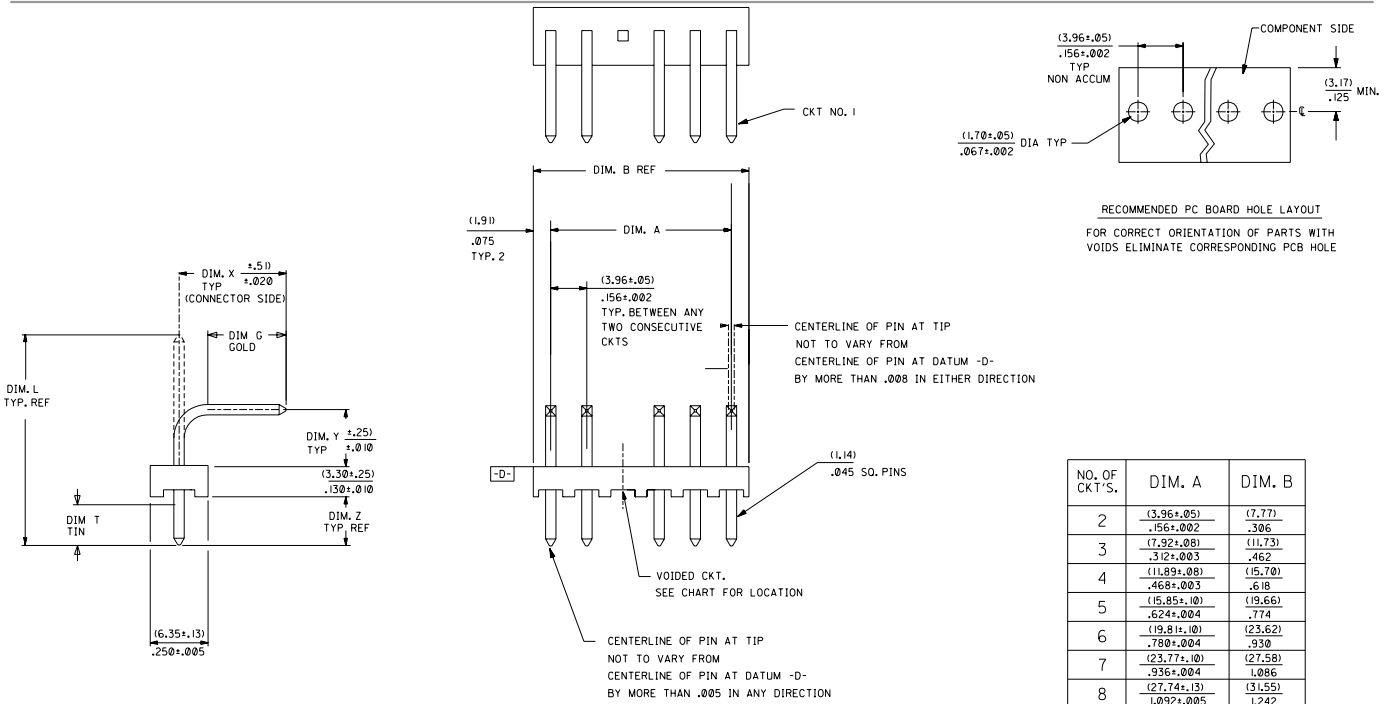

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96±.05) (.156±.002)	(7.77) (.306)
3	(7.92±.081) (.312±.003)	(11.73) (.462)
4	(11.89±.08) (.468±.003)	(15.70) (.618)
5	(15.85±.10) (.624±.004)	(19.66) (.774)
6	(19.81±.10) (.780±.004)	(23.62) (.930)
7	(23.77±.10) (.936±.004)	(27.58) (1.086)
8	(27.74±.13) (1.092±.005)	(31.55) (1.242)
9	(31.70±.13) (1.248±.005)	(35.51) (1.398)
10	(35.66±.13) (1.404±.005)	(39.47) (1.554)
11	(39.62±.15) (1.560±.006)	(43.43) (1.710)
12	(43.59±.15) (1.716±.006)	(47.40) (1.866)
13	(47.55±.15) (1.872±.006)	(51.36) (2.022)
14	(51.51±.18) (2.028±.007)	(55.32) (2.178)
15	(55.47±.18) (2.184±.007)	(59.28) (2.334)
16	(59.44±.18) (2.340±.007)	(63.25) (2.490)
17	(63.40±.20) (2.496±.008)	(67.21) (2.646)
18	(67.36±.20) (2.652±.008)	(71.17) (2.802)


- NOTES:
- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
  - SOLDERABILITY: WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING, FOR OTHER INFORMATION SEE ES-152.
  - PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
  - FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
  - PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
  - FOR PART WITH PEG SEE DWG. NO. SDA-42472

MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).  
PIN: BRASS

PLATINGS:

(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER  
(567) SELECT GOLD 15 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL  
(569) SELECT GOLD 30 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL  
FOR ADDITIONAL INFORMATION SE SDES-88.

REL 0588/0604 UCR2002-0752 03/11/02 SAMEEC	HI	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS SHOWN IN P/P	REVISIONS ONLY ON CAD SYSTEM
REV TO WW SPEC UCR2002-0017 7/25/01 SAMEEC	H	1 PLACE ± 2 PLACE ± 3 PLACE ±	TITLE FLAT HEADER ASS'Y .156 C BENT SQ PINS, W/O PEG 41772 SERIES DRAWING
REL 0574/0587 UCR2001-0262 9-19-00 SAMEEC	G3	DRAWING DIMENSIONS MUST REMAIN WITHIN DIMENSIONS	MOLEX INCORPORATED SHEET NO. DATE LYSLEAL G032 U.S.A. 1 OF 6 09/09/87
LTR. REVISIONS	LTR. REVISIONS	DRG: SAMIEC DWG. BY: PATEL APP'D: LENZ SCALE: 1:1	PART NO. SD A-41772 SEE CHART THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX, INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0026603076 - KK 156 HDR ASSY RTAN TIN 7POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table with columns: ENG. NO., HEADER NO., PIN NO., PLATING, DIM. L, DIM. X, DIM. G GOLD, DIM. Y, DIM. Z, DIM. T TIN, DIM. W, NO-OF CKTS, VOID CKTS, PACKAGING. Rows include part numbers like A-41772-0019/0035 and A-41772-0053/0069.

Large empty table area with column headers corresponding to the first table, likely for additional part specifications.

Table with columns: A-41772-0019/0035, A-41772-0053/0069, A-41772-0070/0086, A-41772-0155/0171, A-41772-0172/0188, A-41772-0189/0205. Sub-headers: EDP NO., ENG. NO., NO OF CKTS.

Technical drawing area containing: DIMENSIONS (SHOW METRIC) INCH, TITLES, MOLEX INCORPORATED, SEE CHART, SDA-41772, and revision table with columns LTR., REVISIONS.