

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0026623084](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

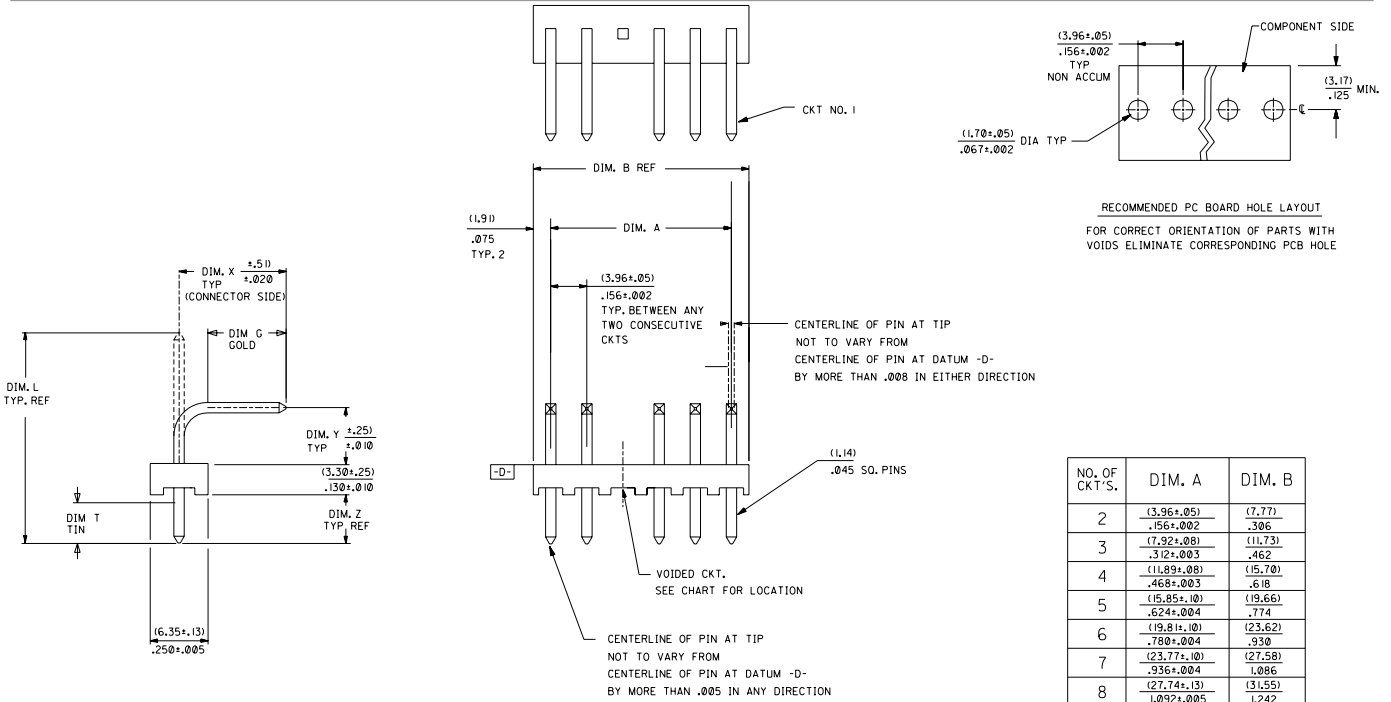

RECOMMENDED PC BOARD HOLE LAYOUT FOR CORRECT ORIENTATION OF PARTS WITH VOIDS ELIMINATE CORRESPONDING PCB HOLE

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96+.05) .156+.002	(17.77) .306
3	(7.92+.08) .312+.003	(11.73) .462
4	(11.89+.08) .468+.003	(15.70) .618
5	(15.85+.10) .624+.004	(19.66) .774
6	(19.81+.10) .780+.004	(23.62) .930
7	(23.77+.10) .936+.004	(27.58) 1.086
8	(27.74+.13) 1.092+.005	(31.55) 1.242
9	(31.70+.13) 1.248+.005	(35.51) 1.398
10	(35.66+.13) 1.404+.005	(39.47) 1.554
11	(39.62+.15) 1.560+.006	(43.43) 1.710
12	(43.59+.15) 1.716+.006	(47.40) 1.866
13	(47.55+.15) 1.872+.006	(51.36) 2.022
14	(51.51+.18) 2.028+.007	(55.32) 2.178
15	(55.47+.18) 2.184+.007	(59.28) 2.334
16	(59.44+.18) 2.340+.007	(63.25) 2.490
17	(63.40+.20) 2.496+.008	(67.21) 2.646
18	(67.36+.20) 2.652+.008	(71.17) 2.802


- NOTES:
- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
 - SOLDERABILITY: WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING, FOR OTHER INFORMATION SEE ES-152.
 - PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
 - FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
 - PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
 - FOR PART WITH PEG SEE DWG. NO. SDA-42472

MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
PIN: BRASS

PLATINGS:

(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER
(567) SELECT GOLD 15 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
(569) SELECT GOLD 30 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
FOR ADDITIONAL INFORMATION SE SDES-88.

REL 0588/0604 UCR2002-0752 03/11/02 SAMEEC	HI	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS SHOWN IN P/P	REVISIONS ONLY ON CAD SYSTEM
REV TO WW SPEC UCR2002-0017 7/25/01 SAMEEC	H	1 PLACE ± 2 PLACE ± 3 PLACE ±	TITLE FLAT HEADER ASS'Y .156 C BENT SQ PINS, W/O PEG 41772 SERIES DRAWING
REL 0574/0587 UCR2001-0262 9-19-00 SAMEEC	G3	DRAWING DIMENSIONS MUST REMAIN WITHIN DIMENSIONS	MOLEX INCORPORATED SHEET NO. DATE 15542L 6032 U.S.A. 1 OF 6 09/09/87
LTR. REVISIONS LTR. REVISIONS		DRG: SAMIEC DWG. BY PATEL APP'D: LENZ SCALE :	PART NO. DRG. NO. SEE CHART SD A-41772
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX, INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0026623084 - KK 156 HDR ASSY RTAN TIN 8POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table with columns: ENG. NO., HEADER NO., PIN NO., PLATING, DIM. L, DIM. X, DIM. G GOLD, DIM. Y, DIM. Z, DIM. T TIN, DIM. W, NO-OF CKTS, VOID CKTS, PACKAGING. Rows include part numbers like A-41772-0019/0035 and dimensions.

Large empty table area with column headers corresponding to the top table, likely for detailed specifications or assembly notes.

Table with columns: EDP NO., ENG. NO., NO OF CKTS. Rows list part numbers and their corresponding connector types, such as 26-61-3020 and 26-61-3030.

Technical drawing area containing a grid, revision table (LTR., REVISIONS), and a title block with fields for DIMENSIONS, TITLE, DATE, and PART NO.