

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0027603071](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

13 12 11 10 9 8 7 6 5 4 3 2 1

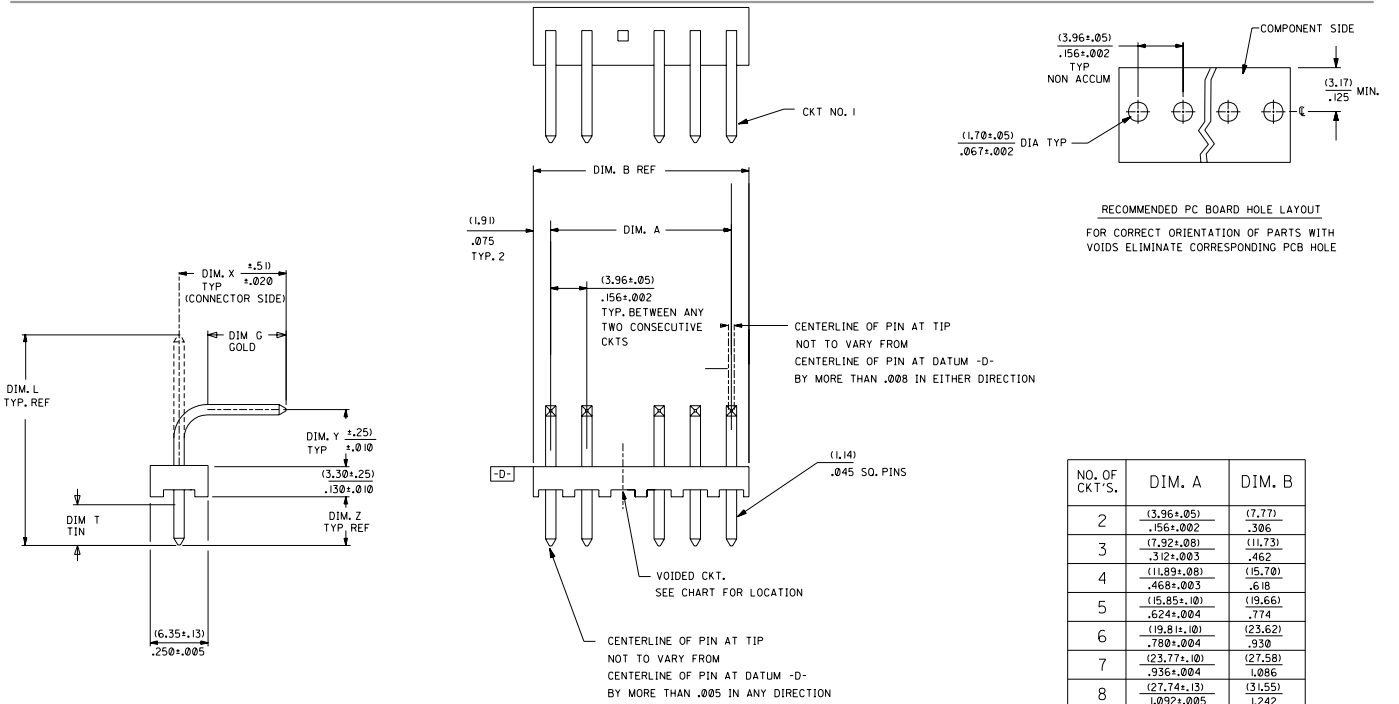

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96±.05) .156±.002	(7.77) .306
3	(7.92±.08) .312±.003	(11.73) .462
4	(11.89±.08) .468±.003	(15.70) .618
5	(15.85±.10) .624±.004	(19.66) .774
6	(19.81±.10) .780±.004	(23.62) .930
7	(23.77±.10) .936±.004	(27.58) 1.086
8	(27.74±.13) 1.092±.005	(31.55) 1.242
9	(31.70±.13) 1.248±.005	(35.51) 1.398
10	(35.66±.13) 1.404±.005	(39.47) 1.554
11	(39.62±.15) 1.560±.006	(43.43) 1.710
12	(43.59±.15) 1.716±.006	(47.40) 1.866
13	(47.55±.15) 1.872±.006	(51.36) 2.022
14	(51.51±.18) 2.028±.007	(55.32) 2.178
15	(55.47±.18) 2.184±.007	(59.28) 2.334
16	(59.44±.18) 2.340±.007	(63.25) 2.490
17	(63.40±.20) 2.496±.008	(67.21) 2.646
18	(67.36±.20) 2.652±.008	(71.17) 2.802

NOTES:

- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
- SOLDERABILITY:** WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING. FOR OTHER INFORMATION SEE ES-152.
- PIN PUSH OUT FORCE:** PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
- FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
- PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
- FOR PART WITH PEG SEE DWG. NO. SDA-42472

MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
PIN: BRASS

PLATINGS:

(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER
(567) SELECT GOLD 15 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
(569) SELECT GOLD 30 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
FOR ADDITIONAL INFORMATION SE SDES-88.


HI	REL 0588/0604 UCR2002-0752 03/11/02 SAMEEC	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS NOTED	REVISE ONLY ON CAD SYSTEM
H	REV TO WW SPEC UCR2002-0017 7/25/01 SAMEEC	3 PLACE ± 2 PLACE ± 1 PLACE ±	FLAT HEADER ASS'Y .156 C BENT SQ PINS, W/O PEG 41772 SERIES DRAWING
G3	REL 0574/0587 UCR2001-0262 9-19-00 SAMEEC	DRAWING DIMENSIONS MUST REMAIN WITHIN DIMENSIONS	MOLEX INCORPORATED SHEET NO. DATE 155244L 6032 U.S.A. 1 OF 6 09/09/87
LTR.	REVISIONS	APP'D: LENZ BY	SEE CHART SD A-41772 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX, INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

13 12 11 10 9 8 7 6 5 4 3 2 1

41772

MFG, SHL, REV.

6	HI
5	H
4	H
3	H
2	H
1	HI



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0027603071 - KK 156 HDR ASSY RTAN TIN 7POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table with columns: ENG. NO., HEADER NO., PIN NO., PLATING, DIM. L, DIM. X, DIM. G GOLD, DIM. Y, DIM. Z, DIM. T TIN, DIM. W, NO-OF CKTS, VOID CKTS, PACKAGING. Rows include part numbers like A-41772-0368/0377 and dimensions.

• ON ASSEMBLIES A-41772-0378 / -0445 THE PIN BEND RADIUS IS TO BE .045 R

Summary table with columns: A-41772-0368/0377, A-41772-0378/0394, A-41772-0412/0428, A-41772-0429/0445, A-41772-0446/0462, A-41772-0531/0547. Sub-headers: EDP NO., ENG. NO., NO OF CKTS.

Technical drawing area containing: DIMENSIONS SHOWN METRIC INCH, TOLERANCES ANGULAR ± 1/2°, TITLE: FLAT HEADER ASSY .156 SQ BENT PIN W/O PEG 41772 SERIES DWG, MOLEX INCORPORATED, SEE CHART, SDA-41772, and revision table.

Bottom row of the sheet with column indices 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1.