

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\)](#)
[3SMAJ5944B-TP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

3SMAJ5913B THRU 3SMAJ5956B

**3.0 Watt
Surface Mount
Silicon
Zener Diodes**

Features

- 3.3thru 200 Volt Voltage Range
- Low Inductance, Low Profile Mounting
- Glass Passivated Junction
- High specified maximum current(I_{ZM})when adequately heat sinking
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"
- Surface Mount Application

Mechanical Data

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Terminals solderable per MIL-STD-750, Method 2026
- Polarity is indicated by cathode band.
- Packaging: Standard 12mm Tape (see EIA 481)
- Maximum temperature for soldering: 260 °C for 10 seconds.


Maximum Ratings @ 25°C Unless Otherwise Specified

| | | | |
|--|-----------------------------------|-----------------|-----------|
| Maximum Forward Voltage | V _F | 1.5V | (Note: 2) |
| Steady State Power Dissipation | P _d | 3.0W | (Note: 3) |
| Operation and Storage Temperature | T _J , T _{STG} | -55°C to +150°C | |
| Thermal Resistance Junction to Lead | R _{thJL} | 25°C/W | |
| Thermal Resistance Junction to Ambient | R _{thJA} | 135°C/W | |

- Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.
2. Forward Current @ 200mA.
3. Mounted on 5.0mm² (1oz thick) land areas.


Lead temperature at T_L=75°C
Lead temperature at T_A=15°C

DO-214AC (SMA) (LEAD FRAME)

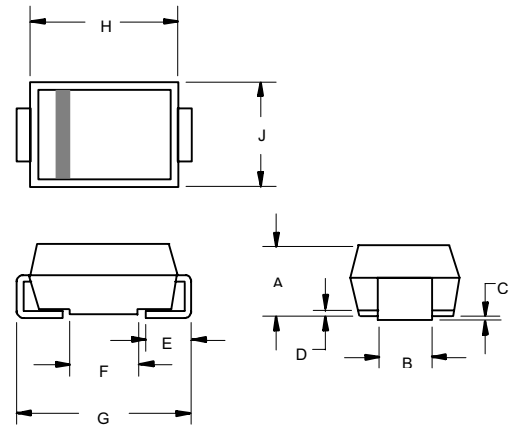

| DIM | INCHES | | MM | | NOTE |
|-----|--------|------|------|------|------|
| | MIN | MAX | MIN | MAX | |
| A | .079 | .096 | 2.00 | 2.44 | |
| B | .050 | .064 | 1.27 | 1.63 | |
| C | .002 | .008 | .05 | .20 | |
| D | --- | .02 | --- | .51 | |
| E | .030 | .060 | .76 | 1.52 | |
| F | .065 | .091 | 1.65 | 2.32 | |
| G | .189 | .220 | 4.80 | 5.59 | |
| H | .157 | .181 | 4.00 | 4.60 | |
| J | .090 | .115 | 2.25 | 2.92 | |

SUGGESTED SOLDER PAD LAYOUT

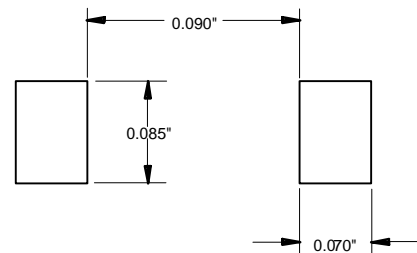

3SMAJ5913B thru 3SMAJ5956B

ELECTRICAL CHARACTERISTICS (T_L=30C unless otherwise noted) (V_F=1.5Volts Max @ I_F=200mAdc for all types.)

| MCC PART NUMBER | ZENER VOLTAGE V _Z (1) | TEST CURRENT I _{ZT} | MAXIMUM DYNAMIC IMPEDANCE Z _{ZT} @I _{ZT} | KNEE CURRENT I _{ZK} | KNEE IMPEDANCE Z _{ZK} | MAXIMUM REVERSE CURRENT I _R | REVERSE VOLTAGE V _R | Maximum DC Zener Current I _{ZM} | DEVICE MARKING |
|-----------------|----------------------------------|------------------------------|--|------------------------------|--------------------------------|--|--------------------------------|--|----------------|
| | VOLTS | mA | OHMS | mA | OHMS | µA | VOLTS | mA | |
| 3SMAJ5913B | 3.3 | 113.6 | 10 | 1 | 500 | 100 | 1 | 908 | H13B |
| 3SMAJ5914B | 3.6 | 104.2 | 9 | 1 | 500 | 75 | 1 | 832 | H14B |
| 3SMAJ5915B | 3.9 | 96.1 | 7.5 | 1 | 500 | 25 | 1 | 768 | H15B |
| 3SMAJ5916B | 4.3 | 87.2 | 6 | 1 | 500 | 5 | 1 | 696 | H16B |
| 3SMAJ5917B | 4.7 | 79.8 | 5 | 1 | 500 | 5 | 1.5 | 638 | H17B |
| 3SMAJ5918B | 5.1 | 73.5 | 4 | 1 | 350 | 5 | 2 | 588 | H18B |
| 3SMAJ5919B | 5.6 | 66.9 | 2 | 1 | 250 | 5 | 3 | 534 | H19B |
| 3SMAJ5920B | 6.2 | 60.5 | 2 | 1 | 200 | 5 | 4 | 482 | H20B |
| 3SMAJ5921B | 6.8 | 55.1 | 2.5 | 1 | 200 | 5 | 5.2 | 440 | H21B |
| 3SMAJ5922B | 7.5 | 50 | 3 | 0.5 | 400 | 5 | 6 | 400 | H22B |
| 3SMAJ5923B | 8.2 | 45.7 | 3.5 | 0.5 | 400 | 5 | 6.5 | 364 | H23B |
| 3SMAJ5924B | 9.1 | 41.2 | 4 | 0.5 | 500 | 5 | 7 | 328 | H24B |
| 3SMAJ5925B | 10 | 37.5 | 4.5 | 0.25 | 500 | 5 | 8 | 300 | H25B |
| 3SMAJ5926B | 11 | 34.1 | 5.5 | 0.25 | 550 | 1 | 8.4 | 272 | H26B |
| 3SMAJ5927B | 12 | 31.2 | 6.5 | 0.25 | 550 | 1 | 9.1 | 250 | H27B |
| 3SMAJ5928B | 13 | 28.8 | 7 | 0.25 | 550 | 1 | 9.9 | 230 | H28B |
| 3SMAJ5929B | 15 | 25 | 9 | 0.25 | 600 | 1 | 11.4 | 200 | H29B |
| 3SMAJ5930B | 16 | 23.4 | 10 | 0.25 | 600 | 1 | 12.2 | 186 | H30B |
| 3SMAJ5931B | 18 | 20.8 | 12 | 0.25 | 650 | 1 | 13.7 | 166 | H31B |
| 3SMAJ5932B | 20 | 18.7 | 14 | 0.25 | 650 | 1 | 15.2 | 150 | H32B |
| 3SMAJ5933B | 22 | 17 | 17.5 | 0.25 | 650 | 1 | 16.7 | 136 | H33B |
| 3SMAJ5934B | 24 | 15.6 | 19 | 0.25 | 700 | 1 | 18.2 | 124 | H34B |
| 3SMAJ5935B | 27 | 13.9 | 23 | 0.25 | 700 | 1 | 20.6 | 110 | H35B |
| 3SMAJ5936B | 30 | 12.5 | 28 | 0.25 | 750 | 1 | 22.8 | 100 | H36B |
| 3SMAJ5937B | 33 | 11.4 | 33 | 0.25 | 800 | 1 | 25.1 | 90 | H37B |
| 3SMAJ5938B | 36 | 10.4 | 38 | 0.25 | 850 | 1 | 27.4 | 82 | H38B |
| 3SMAJ5939B | 39 | 9.6 | 45 | 0.25 | 900 | 1 | 29.7 | 76 | H39B |
| 3SMAJ5940B | 43 | 8.7 | 53 | 0.25 | 950 | 1 | 32.7 | 68 | H40B |
| 3SMAJ5941B | 47 | 8 | 67 | 0.25 | 1000 | 1 | 35.8 | 62 | H41B |
| 3SMAJ5942B | 51 | 7.3 | 70 | 0.25 | 1100 | 1 | 38.8 | 58 | H42B |
| 3SMAJ5943B | 56 | 6.7 | 86 | 0.25 | 1300 | 1 | 42.6 | 52 | H43B |
| 3SMAJ5944B | 62 | 6 | 100 | 0.25 | 1500 | 1 | 47.1 | 48 | H44B |
| 3SMAJ5945B | 68 | 5.5 | 120 | 0.25 | 1700 | 1 | 51.7 | 44 | H45B |
| 3SMAJ5946B | 75 | 5 | 140 | 0.25 | 2000 | 1 | 56 | 40 | H46B |
| 3SMAJ5947B | 82 | 4.6 | 160 | 0.25 | 2500 | 1 | 62.2 | 36 | H47B |
| 3SMAJ5948B | 91 | 4.1 | 200 | 0.25 | 3000 | 1 | 69.2 | 32 | H48B |
| 3SMAJ5949B | 100 | 3.7 | 250 | 0.25 | 3100 | 1 | 76 | 30 | H49B |
| 3SMAJ5950B | 110 | 3.4 | 300 | 0.25 | 4000 | 1 | 83.6 | 26 | H50B |
| 3SMAJ5951B | 120 | 3.1 | 380 | 0.25 | 4500 | 1 | 91.2 | 24 | H51B |
| 3SMAJ5952B | 130 | 2.9 | 450 | 0.25 | 5000 | 1 | 98.8 | 22 | H52B |
| 3SMAJ5953B | 150 | 2.5 | 600 | 0.25 | 6000 | 1 | 114 | 20 | H53B |
| 3SMAJ5954B | 160 | 2.3 | 700 | 0.25 | 6500 | 1 | 121.6 | 18 | H54B |
| 3SMAJ5955B | 180 | 2.1 | 900 | 0.25 | 7000 | 1 | 136.8 | 16 | H55B |
| 3SMAJ5956B | 200 | 1.9 | 1200 | 0.25 | 8000 | 1 | 152 | 14 | H56B |

Note 1: TOLERANCE AND VOLTAGE DESIGNATION - The type numbers listed indicate a tolerance of +/- 5%.



RATING AND CHARACTERISTICS CURVES
3SMAJ5913B thru 3SMAJ5956B

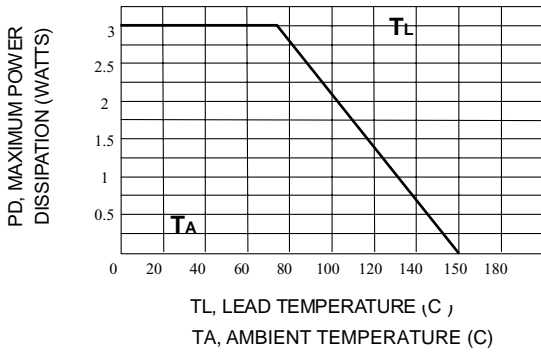


Fig. 1-STEADY STATE POWER DERATING

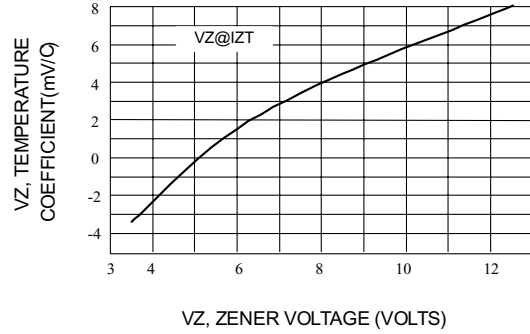


Fig. 2-ZENER VOLTAGE- 3 TO 12 VOLTS

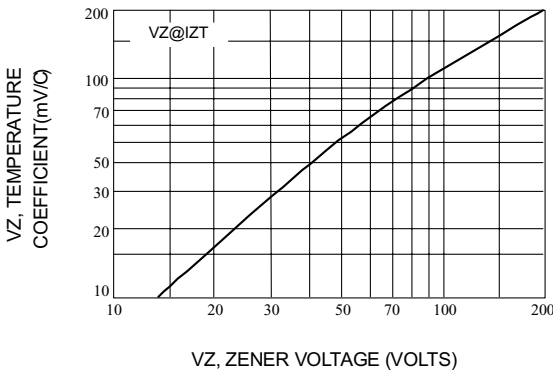


Fig. 3-ZENER VOLTAGE-10 TO 200 VOLTS

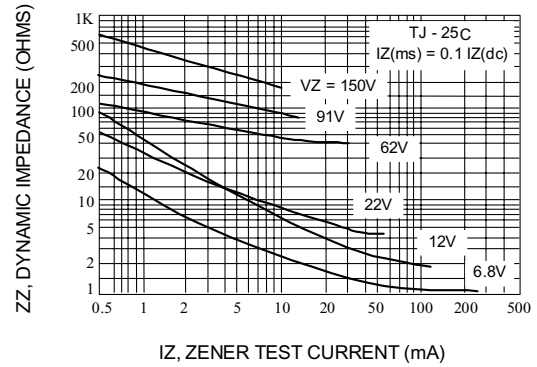


Fig. 4-EFFECT OF ZENER CURRENT



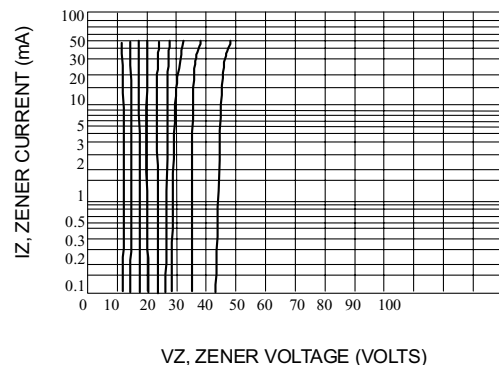


Fig. 7-VZ = 12 THRU 40 VOLTS

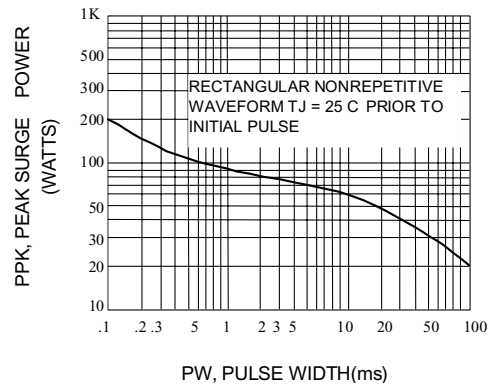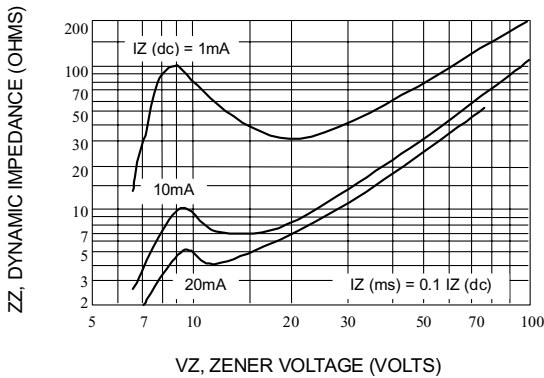

Micro Commercial Components

Ordering Information :

| Device | Packing |
|----------------|-------------------------|
| Part Number-TP | Tape&Reel: 7.5Kpcs/Reel |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.