



Distributor of Panduit: Excellent Integrated System Limited

Datasheet of DNF14-188-C - Connector Quick Connect Receptacle 14-16 AWG 0.187"
(4.75mm) Crimp

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[DNF14-188-C](#)

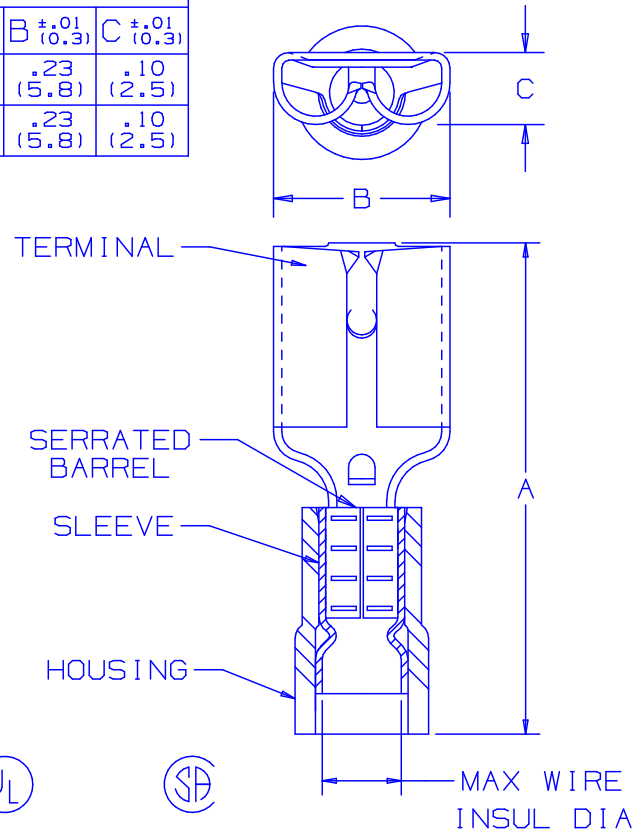
For any questions, you can email us directly:

sales@integrated-circuit.com

PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm ²)	HOUSING COLOR	MAX INSUL DIA	DIMENSIONS		
PREFIX	PKG					A $\pm .03$ (0.8)	B $\pm .01$ (0.3)	C $\pm .01$ (0.3)
DNF18-188	-C -M	.187 × .020 (4.8 × 0.5)	22-18 (.5-1.0)	RED	.137 (3.48)	.76 (19.3)	.23 (5.8)	.10 (2.5)
DNF14-188	-C -M	.187 × .020 (4.8 × 0.5)	16-14 (1.5-2.5)	BLUE	.162 (4.11)	.76 (19.3)	.23 (5.8)	.10 (2.5)

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
A. 300V. MAX. VOLTAGE RATING
B. STRANDED COPPER WIRE ONLY
C. 194° F (90° C) MAX. TEMP. RATING
- PACKAGE QTY: STD. PKG. -C= 100
BULK PKG. -M= 1000
- MATERIAL:
A. STAMPING: .016 (0.4) THK BRASS, TIN PLATED
B. SLEEVE: BRASS, TIN PLATED
C. HOUSING: NYLON
- WIRE STRIP LENGTH 9/32 $\pm 1/32$ (7.1 ± 0.8)
-0 -0
- INITIAL INSERTION FORCE - 12 LB. (53 N) MAX
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N) MAX
6 LB. (27 N) MIN
- INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-500
B. PANDUIT APPROVED: CT-100, CT-160, CT-260,
CT-400, CT-460 * (*FOR DNF14-188 ONLY)
CT-1551, CT-1550
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

LISTED
20H3
E78522CERTIFIED
LR31212

A41313_09

09	11/02	SAC		REMOVED SLOTS & WIRE RANGE FOR DNF18-188 WAS (.38-1.0)				 CORP TINLEY PARK, ILLINOIS			
08	1/01	RM	SKB	FILESPEC WAS N41313AA_PCD_07	08925	JAC	CCH				
07	3/99	JKD		ADDED CT-1551 & CT-1550 TOOLS	07632						
06	7/95	MC	RLS	UPDATED NOTES AND DIMENSIONS	03433	KS	TJP				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DAW	CHK'D	SCALE NONE	DRAWING NO. A41313