

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)


[DNF18-110-C](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

PART NUMBER	TAB SIZE	WIRE RANGE AWG	MAX. INSUL. DIA.	DIMENSIONS in.		
				A $\pm .03$	B $\pm .01$	C $\pm .01$
DNF18-110	.110 X .032 (2.8 X 0.8)	22-18 (0.5-1.0)	.100 (2.54)	.69 (17.5)	.15 (3.8)	.08 (2.0)
DNF18-111	.110 X .020 (2.8 X 0.5)	22-18 (0.5-1.0)	.100 (2.54)	.69 (17.5)	.15 (3.8)	.07 (1.8)



NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - 300V. MAX. VOLTAGE RATING
 - #22-18AWG STRANDED COPPER WIRE ONLY
 - 194° F (90° C) MAX. TEMP. RATING
- MATERIAL:
 - STAMPING - .010" (0.25) THK BRASS, TIN PLATED
 - SLEEVE - BRASS, TIN PLATED
 - HOUSING- NYLON, RED
- PACKAGE QTY: STD. PKG. -C= 100
BULK PKG. -M= 1000
- INITIAL INSERTION FORCE - 12 LB. (53 N) MAX
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N) MAX
6 LB. (27 N) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²
- INSTALLATION TOOLS:
 - UL LISTED & CSA CERTIFIED: CT-520, CT-1525
 - PANDUIT RECOMMENDED: CT-100
- WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)

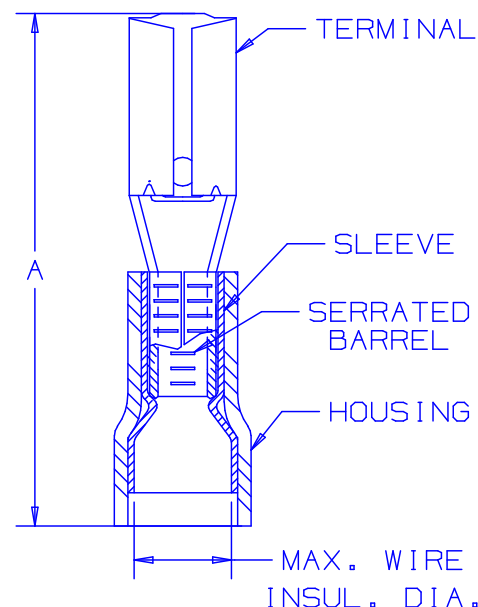

LISTED
20H3
E78522



CERTIFIED
LR31212

A41308_05

05	7/03	KLFU		UPDATED DRAWING				PANDUIT CORP. TINLEY PARK, ILLINOIS
04	5/98	TM	JW	ADDED CT-1525 TO TOOL NOTES	06872	LA	DH	
03	6/95	MS	RS	UPDATED NOTES AND DIMENSIONS	03370	LA	KS	
02	11/94	TH	RS	UPDATED NOTES AND DIMENSIONS	02689	LA	TK	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY: DAW CHK'D: SCALE: NONE DRAWING NO.: A41308

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

#22-18 BARREL NYLON INSULATED FEMALE DISCONNECT, FUNNELED WIRE ENTRY