

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[LDS3EI10-A](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NAME	PANDUIT PART NO. (** SEE NOTE 1)	LENGTH IN. (MM)	STATIC LOAD (SEE NOTE 2)	APPROXIMATE WEIGHT
SOLID WALL DUCT	LDS3**10-A	120.0 ±.12 (3048.0 ±3.0)	.29 LB/IN (5.2 g/mm)	.050 LB/FT (.074 g/mm)


A

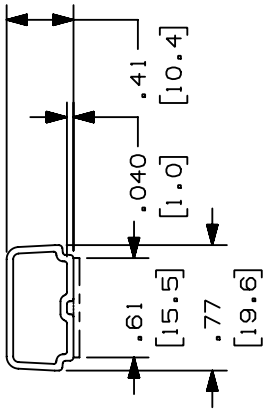

C

B

- NOTES:
- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLORS AND OR PACKAGE QUANTITY.
 - PART IS DESIGNED TO SUPPORT MAXIMUM WEIGHT ON A CLEAN, DRY, SMOOTH SURFACE.
 - TO APPLY PART:
 - REMOVE PROTECTIVE LINER.
 - PLACE PART IN DESIRED LOCATION.
 - APPLY PRESSURE TO FLAT SURFACE OF PART.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.
 - NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. THE CONDITIONS UNDER WHICH THESE RACEWAYS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.



ADHESIVE BACK PRESSURE
SENSITIVE FOAM TAPE
.040(1.0) THICK WITH
PROTECTIVE LINER.

CAD FILENAME/LAYERS		D35541C0_SOLID_LDS3-02.RT	
PANDUIT		CORP. TINLEY PARK, ILLINOIS	
SOLID WALL DUCT (LDS3)		CUSTOMER DRAWING	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ±.010 (.4) (.XX) ±.03 (.8) ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY JBA		SCALE NONE	
DATE 09-24-96		DRAWING NO. 35541-41	
CHECKED BY CEF		SIZE A	
REV		DESCRIPTION	
2	03-08-04	JEP RGR	C. REMOVED PART NUMBER LDS3**2-A
1	09-17-98	PM H1W	B. REVISE NOTES A. REVISE CHART: ADD 2M LENGTH
R	09-24-96	JBA CEF	RELEASED TO PRODUCTION
REV	DATE	BY	CHK
ECN	CHK	CUST	SUP