

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[02041601101](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


X
Kontaktanordnung
contact arrangement





160 Signal Kontakte
160 signal contacts

- = Kontaktposition belegt
= position with contact
- = Kontaktposition nicht belegt
= position without contact


Y (Lochbild)
(board drillings)

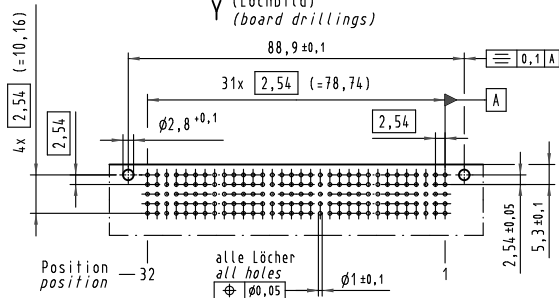

Mitte Befestigungsbohrung
centre line of mounting hole

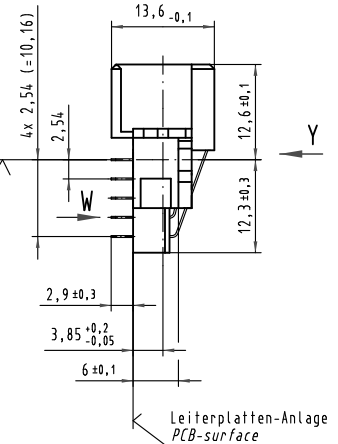


X

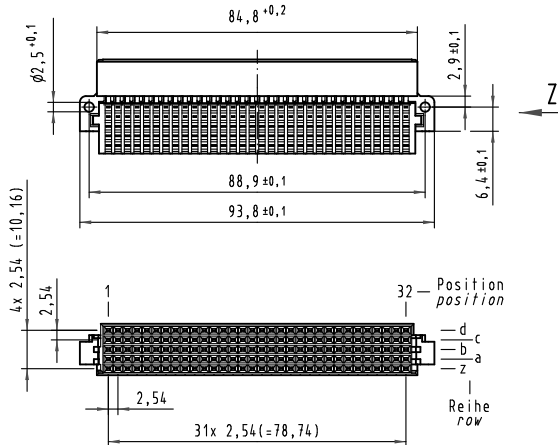

W
10:1

Querschnitt der Lötanschlüsse:
cross-section of solder terminations:

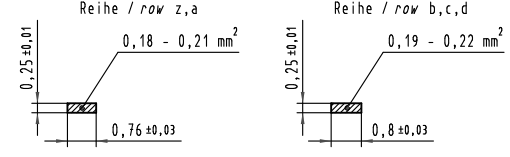

02 04 160 1101	1	Au über/over Ni
Bestell-Nr. part-No.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktüberfläche contact plating

All Dimensions in mm Original Size DIN A 3			Techn. Character.		Nicht tolerierte Maß/Free size tolerances ergänzend/complementary IEC 61076-4-113	
35956	03.12.09	Hage.	Det.	Name	Maßstab/Scale	har-bus 64 Transition Connector
32569	11.03.05	HiL	Detail.	17.03.97	HL.	Einlöt 160 pol.
31166	02.08.02	HL.	Insp.	17.03.97	Pa.	solder 160 pol.
29422	16.03.01	Rie.	Stand.			
21917	25.09.98	HL.				
20654						
Mod.	Dat.	Name	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			TB 02 04 160 x101
						Sub.