

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Harting](#)

[09241206571](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

Y
(Lochbild)
(board drillings)

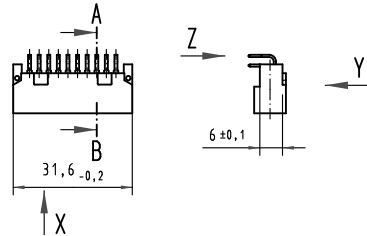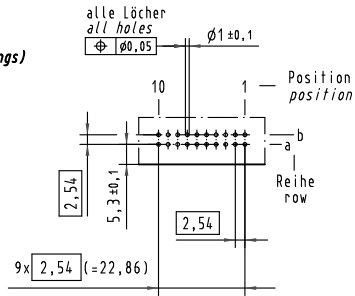


Z
10:1

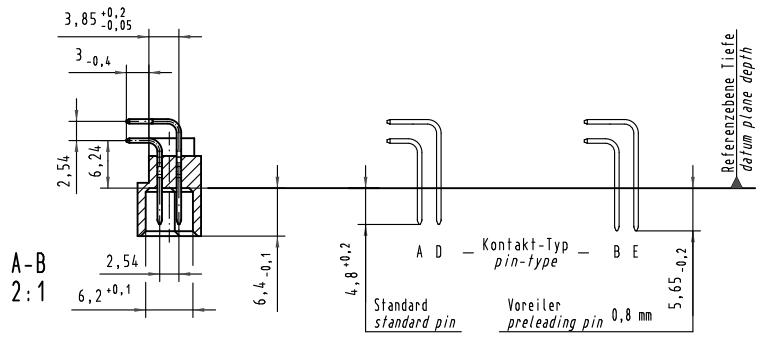

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:



X Kontaktbelegung
contact loading



09 24 120 6571	2	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances IEC 60603-2				
			Dat. Name		Maßstab/Scale		Bauform 3B Messerleiste ohne Flansch Einlöt, 20 pol. type 3B male connector solder, 20 pol. without flange			
			Detail. 05.05.09 MS		1:1					
			Insp. 05.05.09 RA		2:1					
			Stand.		10:1					
35604			HARTING Electronics GmbH & Co. KG					TB 09 24 120 x571		
Mod. Dat. Name			D-32339 ESPELKAMP					Sub.		
								Blatt/ page		