

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)

[09455450023](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

Panel cutting I

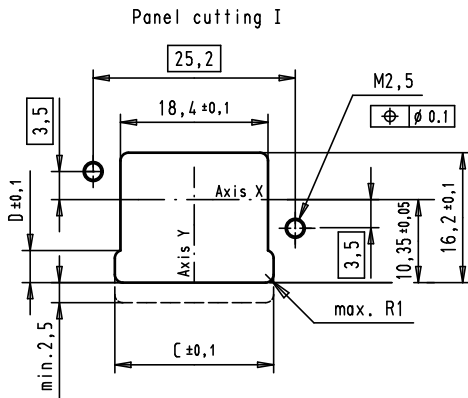



C = 19,8 and D = 4,0 for solder pin data layout
C = 21,0 and D = 4,1 for SMD data layout




Connector pitch on panel:
Axis X = 27 mm and Axis Y = 21 mm
Receptacle mating side according to
600076-3-106 IEC - variant 04

RJ 45 jack mating references A and B
according to IEC 60603-7

(1) Screwing x2 M2.5 screws between 0.5N.m and 0.8N.m
screw according to DIN 912 and ISO 4762

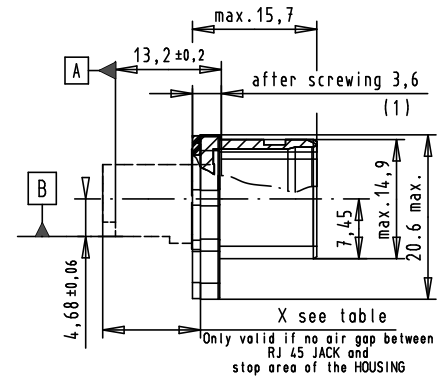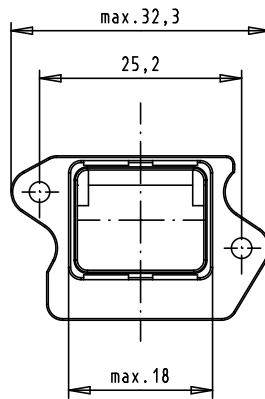


1 mm thickness flat seal
before screwing

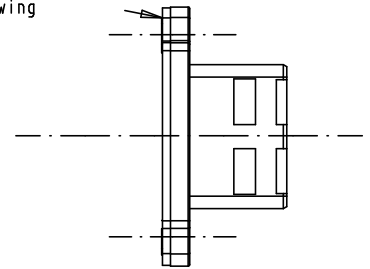

NO AIR GAP BETWEEN RJ45 JACK AND HOUSING

RJ 45 JACK VARIANT	TB	X
angled jack SMD variant	09 45 551 1100	17,6 +/- 0,4
angled jack SOLDER PIN variant	09 45 551 1102	17,6 +/- 0,4

Mod.	Det.	Name
EC01204	12/01/10	AB
35413	17/11/08	AB
35307	15/09/08	AB
33093	12/09/05	AM
32985	09/08/05	AM
HARTING EURL F-95972 Paris		



All Dim. in mm
Orig. Size DIN A 4

Push pull RJ Industrial
Thermoplastic IP67 Receptacle
And flat Seal for angled jacks

Maßstab/
Scale

1,5:1

TB 09 45 545 00 23

Blatt/ Page

1/1